

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[BUD Industries, Inc.](#)

[PN-1327](#)

For any questions, you can email us directly:


[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

|           |                   |          |                                   |           |          |
|-----------|-------------------|----------|-----------------------------------|-----------|----------|
| PART NAME | NEMA 4X ENCLOSURE | PART No. | PN-1327, PN-1327-C AND PN-1327-DG | REV. DATE | 11-17-08 |
|-----------|-------------------|----------|-----------------------------------|-----------|----------|

**INDUSTRY STANDARDS:**

POLYCARBONATE (LIGHT GRAY AND CLEAR)  
UL94-HB FLAMMABILITY RATING (UL FILE #E41613)  
UV STABILIZED  
SERVICE TEMPERATURE RANGE: -40°C TO +120°C

ABS (DARK GRAY)  
UL94-HB FLAMMABILITY RATING (UL FILE #E56070)  
SERVICE TEMPERATURE RANGE: -40°C TO +80°C

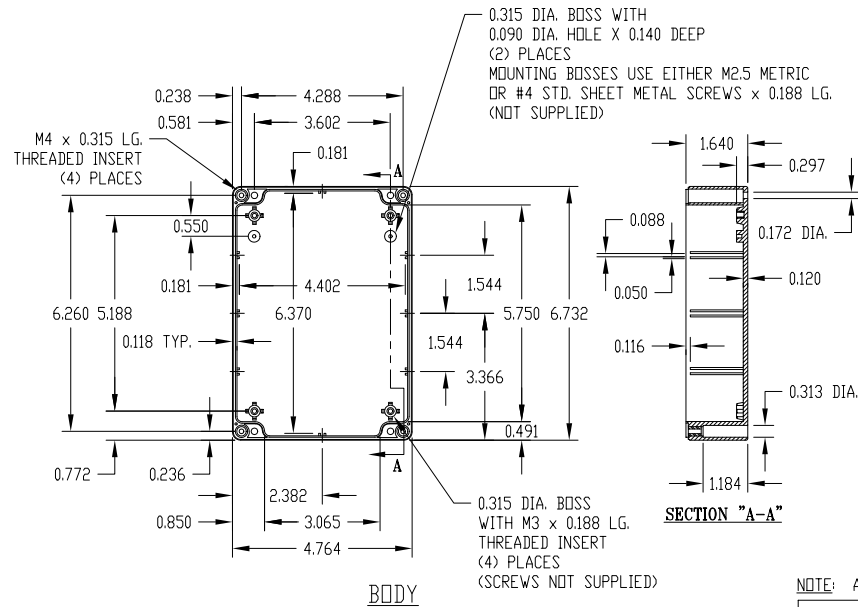

NOTE: ALL DIMENSIONS HAVE ±0.015 TOLERANCE UNLESS OTHERWISE SPECIFIED.

| PART NUMBER | MATERIAL        |       | FINISH     |       | HARDWARE KIT                                                      |
|-------------|-----------------|-------|------------|-------|-------------------------------------------------------------------|
|             | BODY            | COVER | BODY       | COVER |                                                                   |
| PN-1327     | POLYCARBONATE   |       | LIGHT GRAY |       | KIT CONTAINS (4)<br>M4 x 20mm (0.787") LG.<br>SCREWS FOR ASSEMBLY |
| PN-1327-C   | POLYCARBONATE   |       | LIGHT GRAY | CLEAR |                                                                   |
| PN-1327-DG  | HIGH-IMPACT ABS |       | DARK GRAY  |       |                                                                   |