
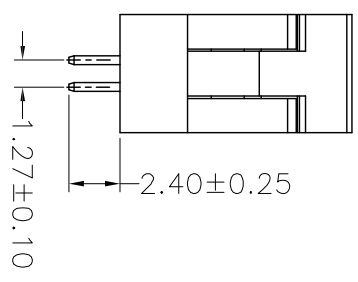
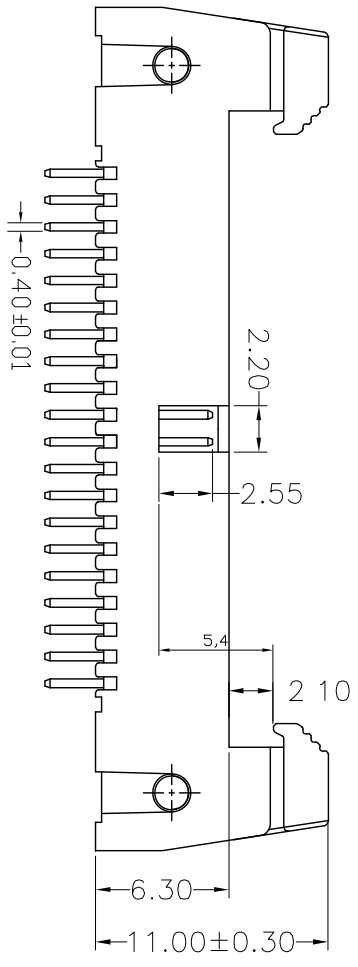


REV.	DESCRIPTION	DATE
A	RELEASE	2012.11.12


RoHS

NOTES:

- Insulator Material: PBT, UL 94V-0
- Contact Plating: Flash Gold
- Contact Material: Brass
- Current Rating : 1A AC,DC
- Contact Resistance: 20MΩ Max.
- Dielectric Withstanding: AC 500V
- Insulator Resistance: 1000MΩ Min.
- Operating Temp.: -40°C~+105°C

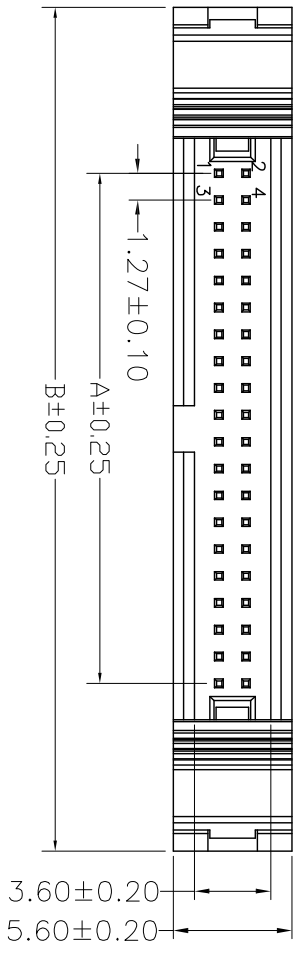

NUMBER OF POSITIONS	DIMENSIONS	
	A	B
06	2.54	18.31
08	3.81	19.58
10	5.08	20.85
12	6.35	22.12
14	7.62	23.39
16	8.89	24.66
18	10.16	25.93
20	11.42	27.20
24	13.97	29.74
26	15.24	31.01
30	17.78	33.55
34	20.32	36.09
40	24.13	39.90
50	30.48	46.25
60	36.83	52.60
64	39.37	55.14

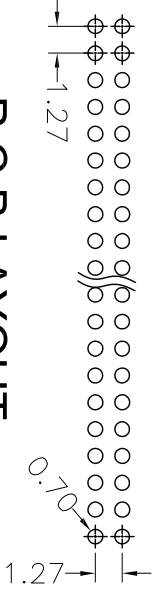

P.C.B LAYOUT

UNLESS TOLERANCE		DRAW BY	
GENERAL	ANGLE	DESIGN BY	
X ± 0.30	X° ± 3.0°	CHECK BY	
.X ± 0.20	.XX° ± 2.0°	APPROVE BY	
.XX ± 0.15	.XXX° ± 1.0°	SCALE	1:1
.XXX ± 0.08	.XXX ± 0.5°	SHEET	1/1
		UNIT	MM

CnC Tech,LLC

Part No. 3210-XX-001-12-00

SCALE 1:1 SHEET 1/1 UNIT MM

DRAW NO: REV: A

