

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Industrial Fiber Optics, Inc.](#)
[51 0420](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

© COPYRIGHT 2009 BY INDUSTRIAL FIBER OPTICS, INC.
ALL RIGHTS RESERVED.

LIGHT PIPE PREPARATION/INSTALLATION:

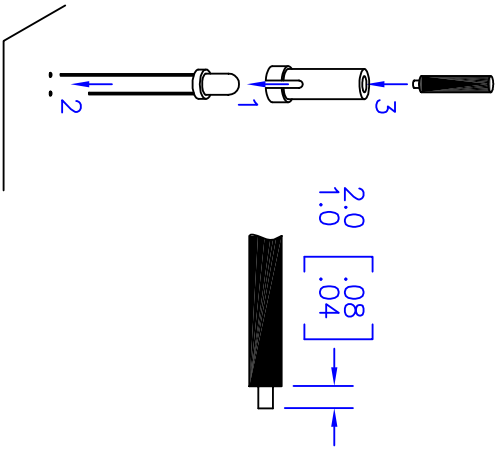


NOTES:

1. ROHS COMPLIANT
2. UL 94V-2 FLAMMABILITY RATING
3. -40°C TO 85°C OPERATING TEMPERATURE
4. SUITABLE FOR LIGHT PIPE WITH $\phi 2.2\text{mm}$ JACKET AND OPTICAL CORE NO GREATER THAN $\phi 1.5\text{mm}$
5. DO NOT WAVE SOLDER WITH THIS DEVICE
6. FOR BEST RESULTS USE ONLY NARROW VIEWING ANGLE NON-DIFFUSED LEDS WITH OUTPUT POWER GREATER THAN 100mcd
7. NOT RECOMMENDED FOR DATA COMMUNICATIONS



METRIC

REVISIONS				
REV	DESCRIPTION	ECO	DATE	APVD
C	REVISED STRIP LENGTH FROM 1.0 $\pm$.05	0034	09/17/09	BB KS

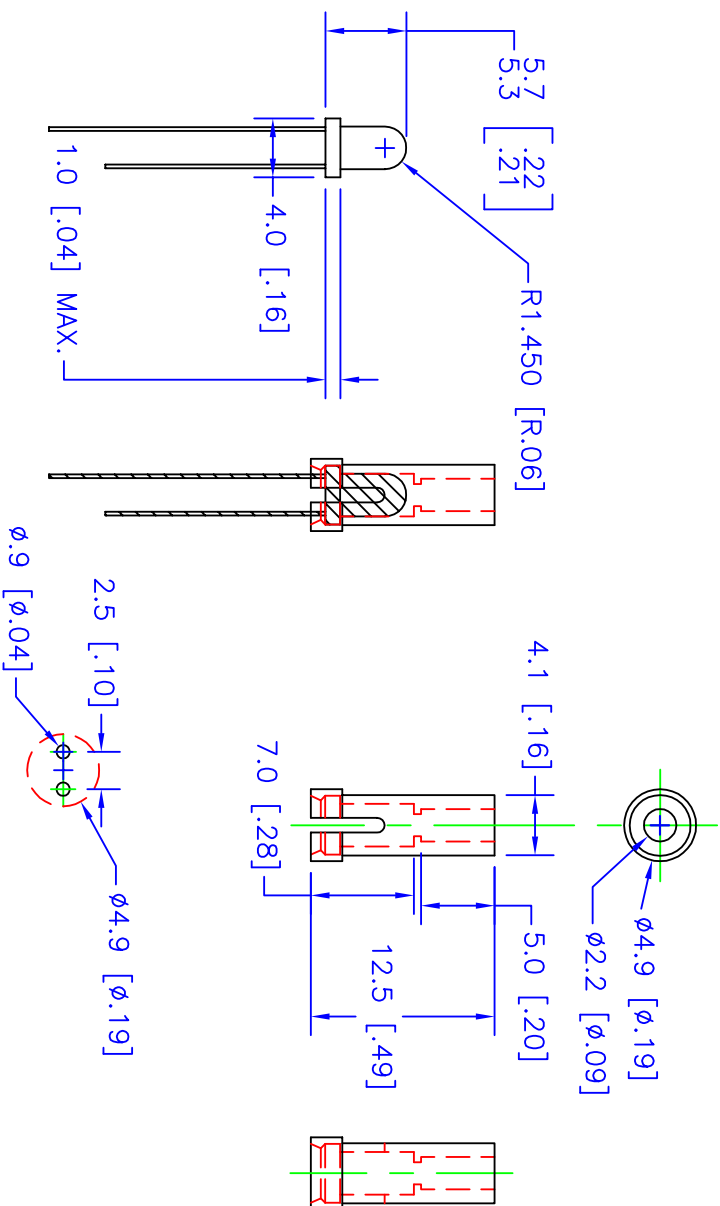

PART IS MADE OF BLACK NYLON.

UNLESS OTHERWISE SPECIFIED		PRODUCT		NAME	
DIMENSIONS MILLIMETERS [IN.]		LIGHT PIPE		MOUNT, VERTICAL LED TO LIGHT PIPE	
TOLERANCES		MATERIAL		TEMP., AZ 85281	
0 PLC: ± 1	SURFACE 32/	FINISH		NONE	
1 PLC: ± 0.25	TEXTURE: $\checkmark$	DRAWN BY		B. BIDWELL	
2 PLC: ± 0.127		DATE		11/12/08	
3 PLC: ± 0.025		CHECKED BY		K. STOTZ	
4 PLC: ± 0.013		DATE		09/17/09	
ANGLE: $\pm 1/2^\circ$		DO NOT SCALE		SHEET 1 OF 1	
REMOVE BURRS AND SHARP EDGES		FLATNESS .005 MM PER MM		REV C	
ALL DIMENSIONS AFTER FINISH					