

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Coto Technology](#)

[CT10-1540-G1](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

CT10-XXXX-G1 DATA SHEET




GENERAL

The CT10-XXXX-G1 is a reed switch based proximity sensor activated by the presence of a magnetic field. It is designed for SMD mounting.

SPECIAL FEATURES

- Ideal for SMD pick and place
- Rugged encapsulation
- Excellent lifetime and reliability
- Gold and sputtered ruthenium contact layers
- Tape and Reel packaging

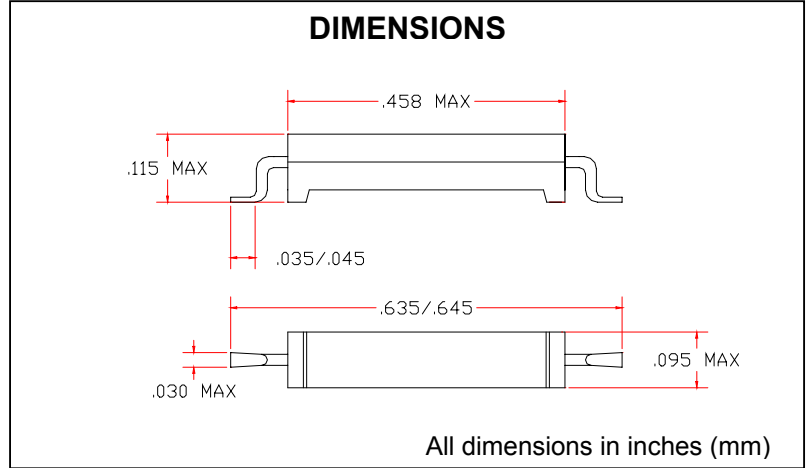

SAMPLE APPLICATIONS


- Note book computer covers
- Security system sensors
- Electric, gas metering
- Fluid flow sensor
- Level sensor
- Many more

ELECTRICAL CHARACTERISTICS

Parameter	CT10-XXXX-G1	Unit
Operate range *	10-40	AT
Release range *	n.d.	AT
Switched power max	10	VA
Switched current max	500	mA
Switched voltage max	200	VDC
Switched voltage max	140	VAC
Breakdown voltage min	230	VDC
Contact resistance max	115	mΩ
Insulation resistance	1 x 10 ⁶	MΩ

* Measured in 10jk Coil after modification.

TAPE & REEL

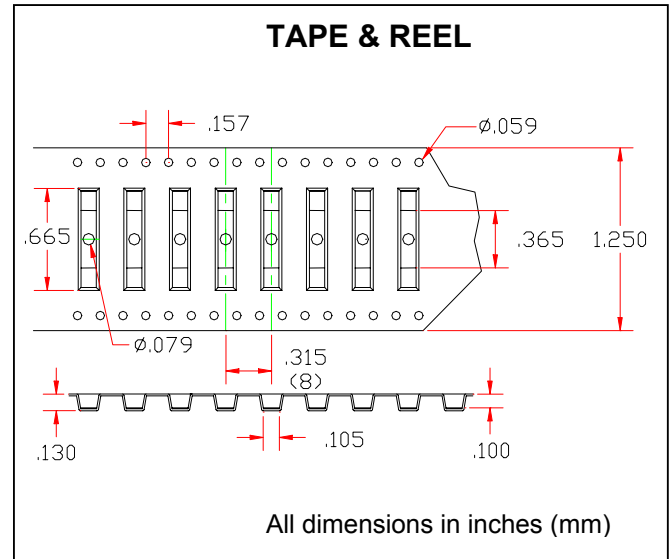

SWITCHING?

Think Coto Technology
Reed Switches, Relays and Sensors

Coto Technology
 55 Dupont Drive
 Providence, RI 02907
 USA
 1 (401) 943-2686
 1 (401) 942-0920 (fax)
 www.cotorelay.com

Coto Technology B.V.
 Jan Campertstraat 5
 6416SG Heerlen
 The Netherlands
 +31 (0)45 5439345
 +31 (0)45 5427216 (fax)