

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Anaren](#)
[1Z0261-3](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Anaren


Model 1Z0261-3

Hybrid Couplers

High Power 3 dB, 90°

Applications

- Microstrip Circuits
- Power Amps
- Divider/Combiners
- Switch Networks
- Balanced Detectors
- Antenna Feeds

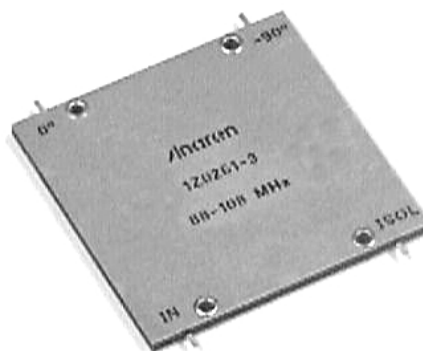

Features

- Welded Tab Mount
- 2-Way Power Split
- Reliable Performance
- Handles 980 Watts


Electrical Specifications

Frequency MHz	Isolation dB Min/Typ	Insert. Loss dB Max	VSWR Max : 1
88 - 108	23	0.25	1.15
Amp. Bal. dB Max	Phase Bal. Degrees Max	Power Ave. CW Watts	
±0.30	±2.0	980	

Notes: Impedance: 50 ohms nominal. Meets MIL-E-5400 Class 3 requirements. Additional screening available for military and space applications. Electrical specifications apply only properly designed test fixtures. Testing is done at ambient temperature only. Sample testing is performed to MIL-Std-105, Level ii, AQL 1.0. Test includes coupling, amplitude balance, insertion loss and isolation. If your application requires additional testing, consult Anaren. Power rating applies when solder tab/coupler interface has been conformally coated.

Electrical and Mechanical Specifications subject to change without notice.

Outline Drawing

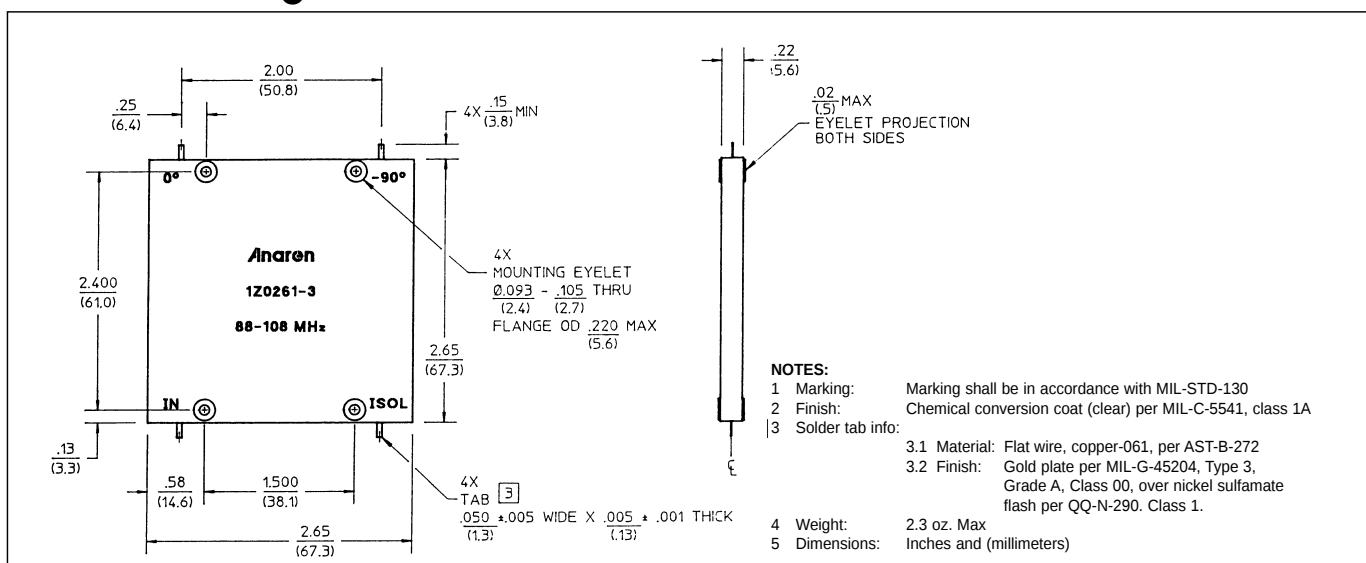

Sales Desk USA: Voice: (800) 544-2414 Fax: (315) 432-9121
Sales Desk Europe: Voice: (+44) 23 92 232392 Fax: (+44) 23 92 251369