


Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Essentra Components \(formerly Richco, Inc.\)](#)
[BPF-A414](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

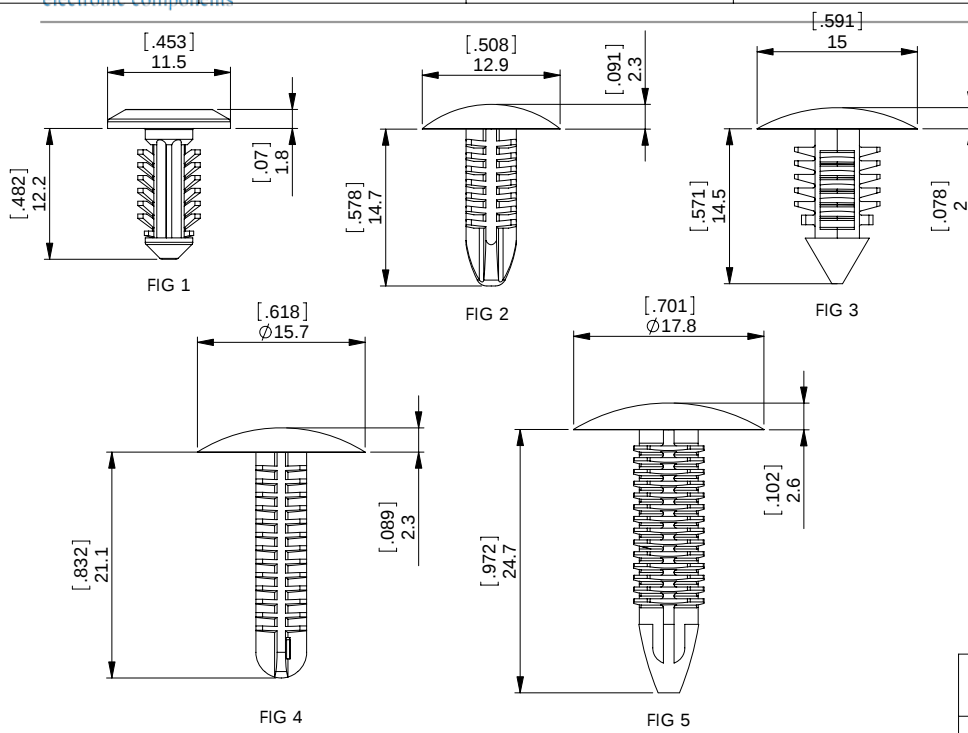

REV	MODIFICATION	DATE	DRN
01	DRAWING RELEASE ECN 06-229	05/10/06	NJB
02	ECN 06-233	11/10/06	NJB
03	CO2010372	03/09/08	SF
04	CO2010405	23/09/08	TC
05	CO2010642	01/05/09	SF

NOTE

- 1) OTHER COLOURS AVAILABLE BY SPECIAL ORDER.
EXAMPLE: BPF-A414-OR FOR ORANGE.

INFORMATION CONTAINED IN THIS DOCUMENT IS CONFIDENTIAL TO RICHCO INTERNATIONAL Co. Ltd. AND MAY NOT BE DISCLOSED OR REPRODUCED IN WHOLE OR PART WITHOUT THEIR WRITTEN CONSENT.

		GENERAL TOLERANCES ±0.25 [0.010] UNLESS OTHERWISE STATED 1 DECIMAL PLACE ± 0.25 [0.010] 2 DECIMAL PLACES ± 0.10 [0.004] ANGULAR ±1°	
		THIRD ANGLE 	
MATERIAL: SEE TABLE		COLOUR: SEE NOTE	
DESCRIPTION: Barbed Push Fastener		PART No: SEE TABLE	
DRG No: 06-045	NPR No:	DATE 02/05/06	SCALE NTS
DRN NJB	CHKD NBR	DATE 11/10/06	SHEET No. 1 OF 1

Figure	Nylon 6/6 25% Glass Filled UL94 V-0 RMS-112 Colour: Black	Nylon 6/6 UL94 V-0, RMS-19 Colour: Black	Nylon 6/6 UL94 V-0, RMS-19 Colour: Natural	Nylon 6/6 UL94 V-2, RMS-01 Colour: Natural	Nylon 6/6 UL94 V-2, RMS-01 Colour: Black	Hole Diameter ± .08 (.003)	Panel Thickness
1	SPECIAL BPF-A414-GF	STANDARD BPF-A414	SPECIAL BPF-A414-19NT	-	-	4.7 [.185]	0.8 - 3.0 [.031 - .118]
2	-	SPECIAL BPF-F4410-19	-	SPECIAL BPF-F4410NT	STANDARD BPF-F4410	5.0 [.197]	1.5 - 7.5 [.059 - .295]
3	-	STANDARD BPF-F2495	-	-	-	7.0 [.276]	3.2 - 6.0 [.125 - .236]
4	-	STANDARD BPF-F3T31	-	-	-	5.0 [.197]	2.0 - 10.0 [.079 - .394]
5	SPECIAL BPF-F1G12-GF	STANDARD BPF-F1G12	-	-	-	7.0 [.276]	2.0 - 15.0 [.079 - .591]