

Excellent Integrated System Limited

Stocking Distributor




Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Vicor Corporation](#)
[38146](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DESCRIPTION	DATE	APPROVED
1	REVISED PER E120943	GCK 10/22/12	REJH
2	REVISED PER E130143	GCK 02/01/13	REJH

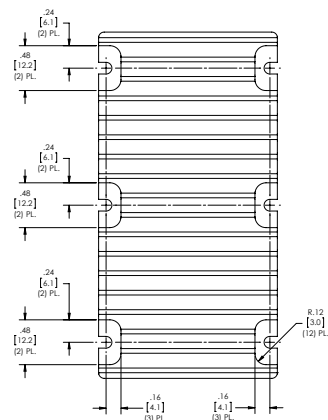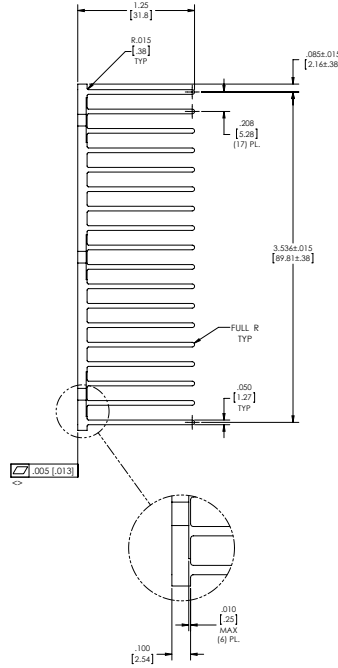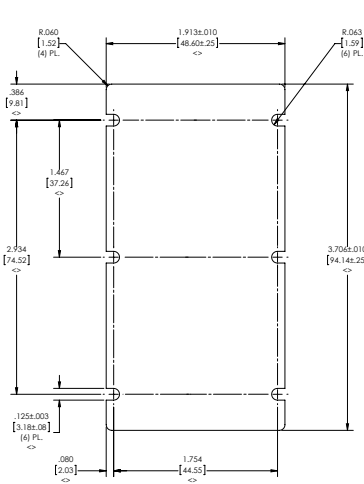

- NOTES:
- 1- MATL: ALUMINUM 6063-T5.
 - 2- CORNERS SHOWN SHARP TO BE .005/(.13) MAX.
 - 3- CLEAR FINISH R/HIS COMPLIANT PER CST-0001, LATEST REVISION PER
 - A.) CHROMIUM FREE OR
 - B.) TRIVALENT CHROMIUM IN ACCORDANCE WITH MIL-DTL-5541, TYPE II, CLASS 1A OR 3.
 SEE CST-0003 FOR TYPES OF AVAILABLE FINISHES.
 - 4- ALL DIMENSIONS APPLY AFTER PLATING.
 - 5- <-> DENOTES CRITICAL CHARACTERISTIC FOR LOT INSPECTION.
 - 6- MAXIMUM STEP BETWEEN ADJOINING CUTTER PASSES TO BE .0005/(.013)
 - 7- BASE PLATE SURFACE PREPARATION PRIOR TO CLEAR FINISH IN ACCORDANCE WITH WS-0014.
 - 8- REMOVE ALL BURRS AND SHARPE EDGES.



DESIGNED BY	DATE	VICOR		REV
R.E. J. Hickey	02/06/11			
HEATSINK VIBRICK X-FLOW 1.25				
DESIGNED BY	DATE	FILE	CODE	REV
R.E. J. Hickey	02/06/11	D	67131	38146
SCALE: 2:1		SHEET 1 OF 1		