

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Johanson Technology Inc.](#)
[5300CF15A0950E](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

High Frequency Ceramic Solutions

5.3GHz Directional Coupler/ Low Pass Filter Combo Passive

P/N 5300CF15A0950

Detail Specification: 01/20/2012

Page 1 of 4

General Specifications

Part Number	5300CF15A0950
Frequency (MHz)	4900 - 5850
Insertion Loss	0.8 dB max.
Return Loss	20 dB min.
Attenuation (min.)	20 dB @ 2 x Fo
Coupling	15 ± 1 dB
Isolation	22 dB min.


Impedance	50 Ω
Operating Temperature	-40 to +85°C
Storage Conditions	+5 to +35°C, Humidity 45~75%RH, 18 months max.
Reel Quantity	4000
Power (max.)	2W

P/N Suffix	Packaging Style	Bulk	Suffix = S	Eg. 5300CF15A0950S
		T & R	Suffix = E	Eg. 5300CF15A0950E
	Termination Style	100% Tin	Suffix = None	Eg. 5300CF15A0950(E or S)
		Tin / Lead	Suffix = /Pb	Eg. 5300CF15A0950(E or S)/Pb
Evaluation Board (2-Port SMA EVB)		5300CF15A0950-EB-SMA		

*<http://johansontechnology.com/en/integrated-passives/integrated-passive-tape-a-reel-packaging.html>


Mechanical Dimensions

	In	mm
L	0.079 ± 0.004	2.00 ± 0.10
W	0.049 ± 0.004	1.25 ± 0.10
T	0.027 ± 0.004	0.70 ± 0.10
a	0.012 ± 0.004	0.30 ± 0.10
b	0.008 ± 0.004	0.20 ± 0.10
c	0.012 ± 0.004/-0.008	0.30 ± 0.1/-0.2
g	0.014 ± 0.004	0.35 ± 0.10
p	0.026 ± 0.002	0.65 ± 0.05

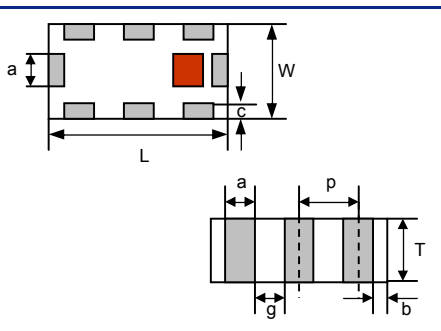

Terminal Configuration

No.	Function
1	Termination
2	GND
3	GND
4	Input
5	Coupled Out
6	GND
7	GND
8	Output




Mounting Considerations

Mount these devices with brown mark facing up.

Line width should be designed to provide 50 ohm impedance, depending on PCB material and thickness

Units: mils

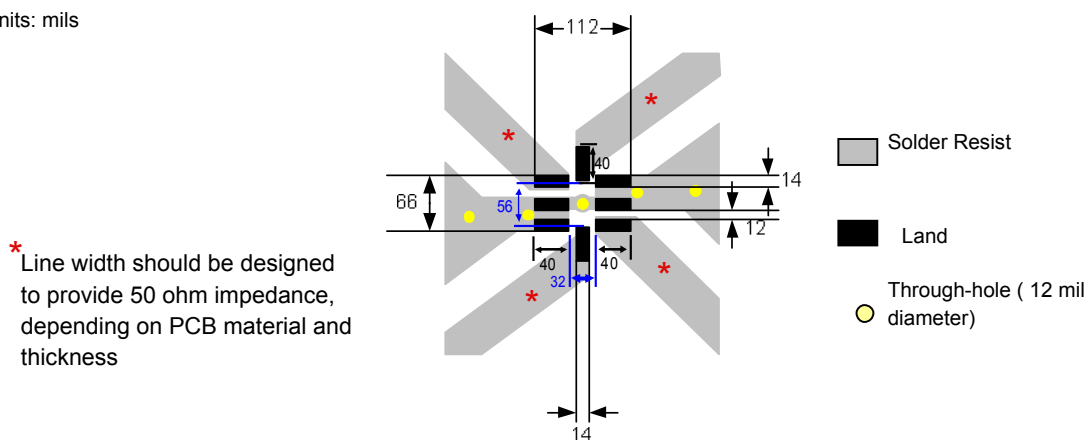

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

High Frequency Ceramic Solutions


5.3GHz Directional Coupler/ Low Pass Filter Combo Passive

P/N 5300CF15A0950

Detail Specification: 01/20/2012

Page 2 of 4

Typical Electrical Performance (T=25°C)

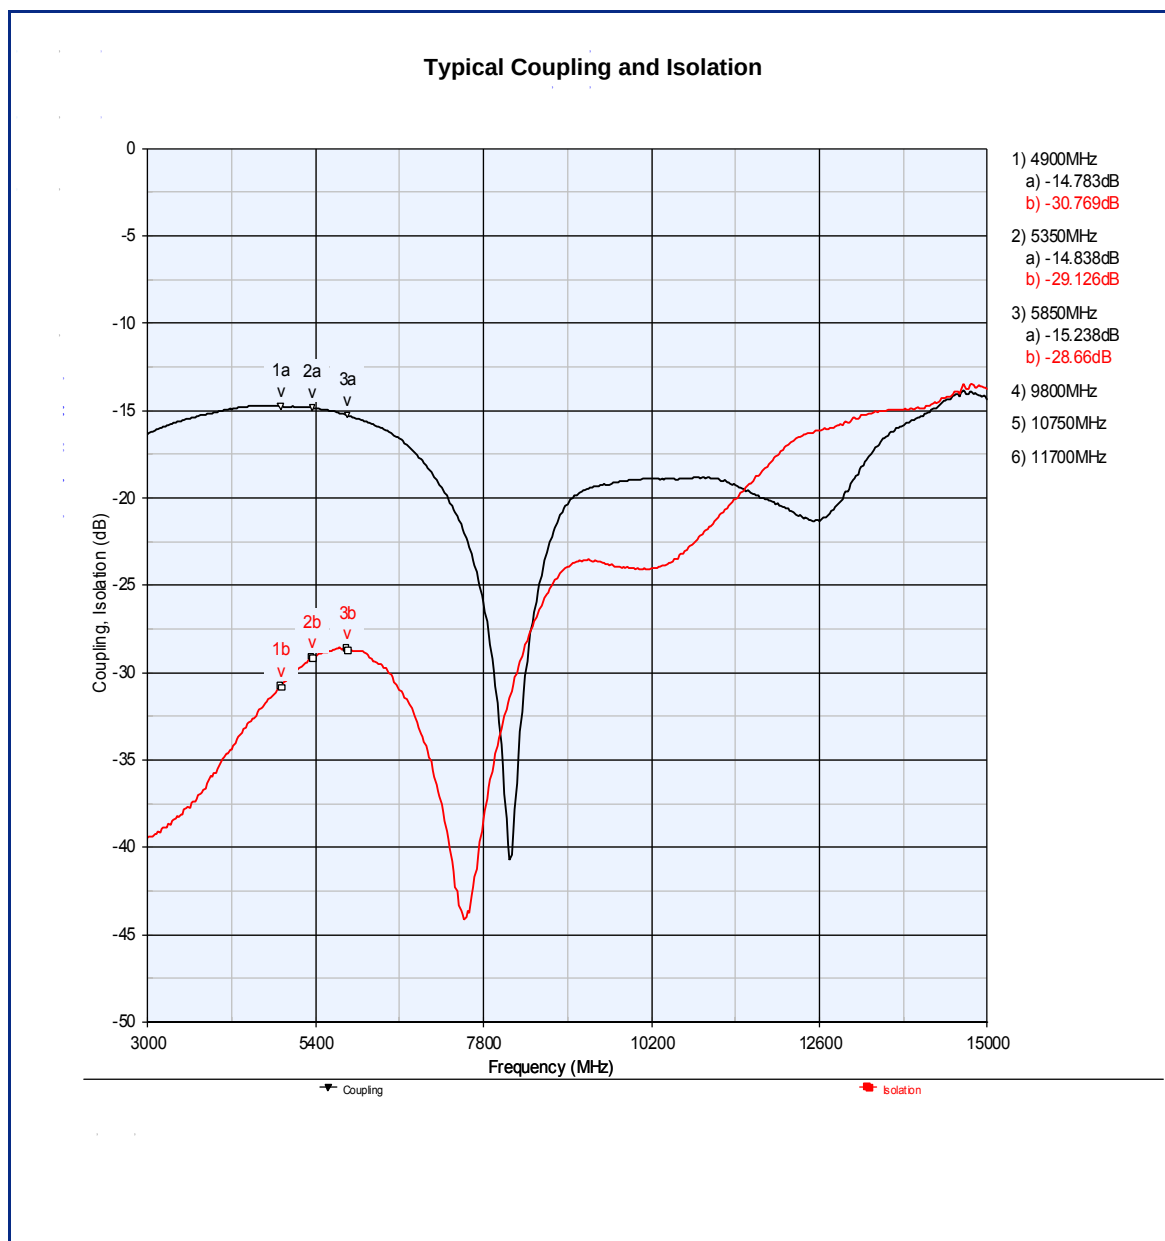

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

High Frequency Ceramic Solutions


5.3GHz Directional Coupler/ Low Pass Filter Combo Passive

P/N 5300CF15A0950

Detail Specification: 01/20/2012

Page 3 of 4

Typical Electrical Performance (T=25°C)

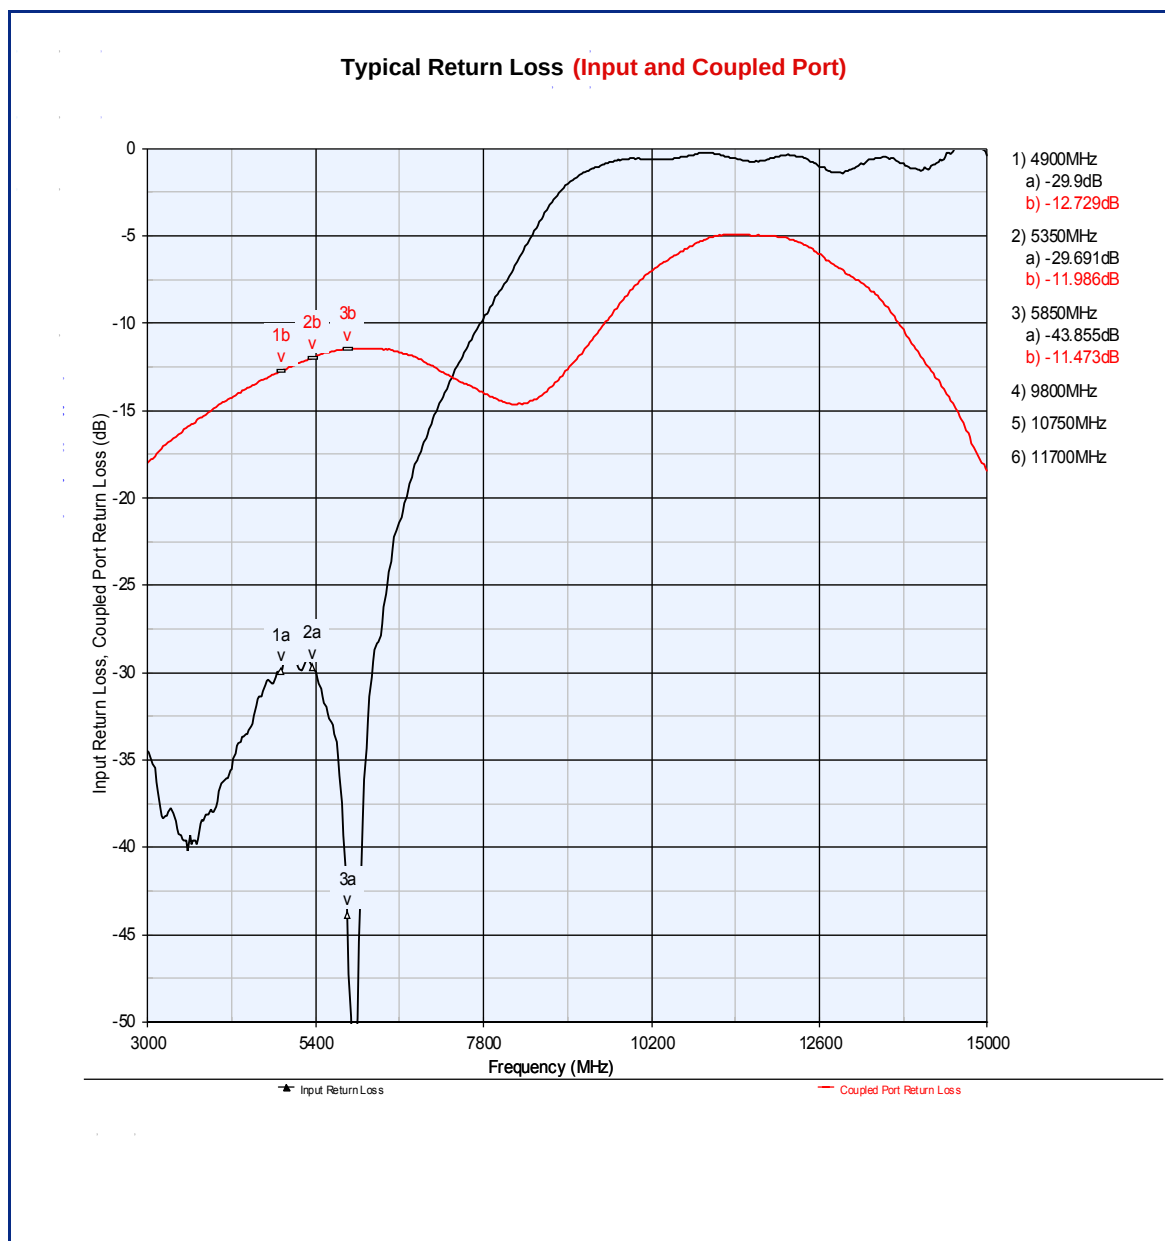

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

High Frequency Ceramic Solutions


5.3GHz Directional Coupler/ Low Pass Filter Combo Passive

P/N 5300CF15A0950

Detail Specification: 01/20/2012

Page 4 of 4

Typical Electrical Performance (T=25°C)

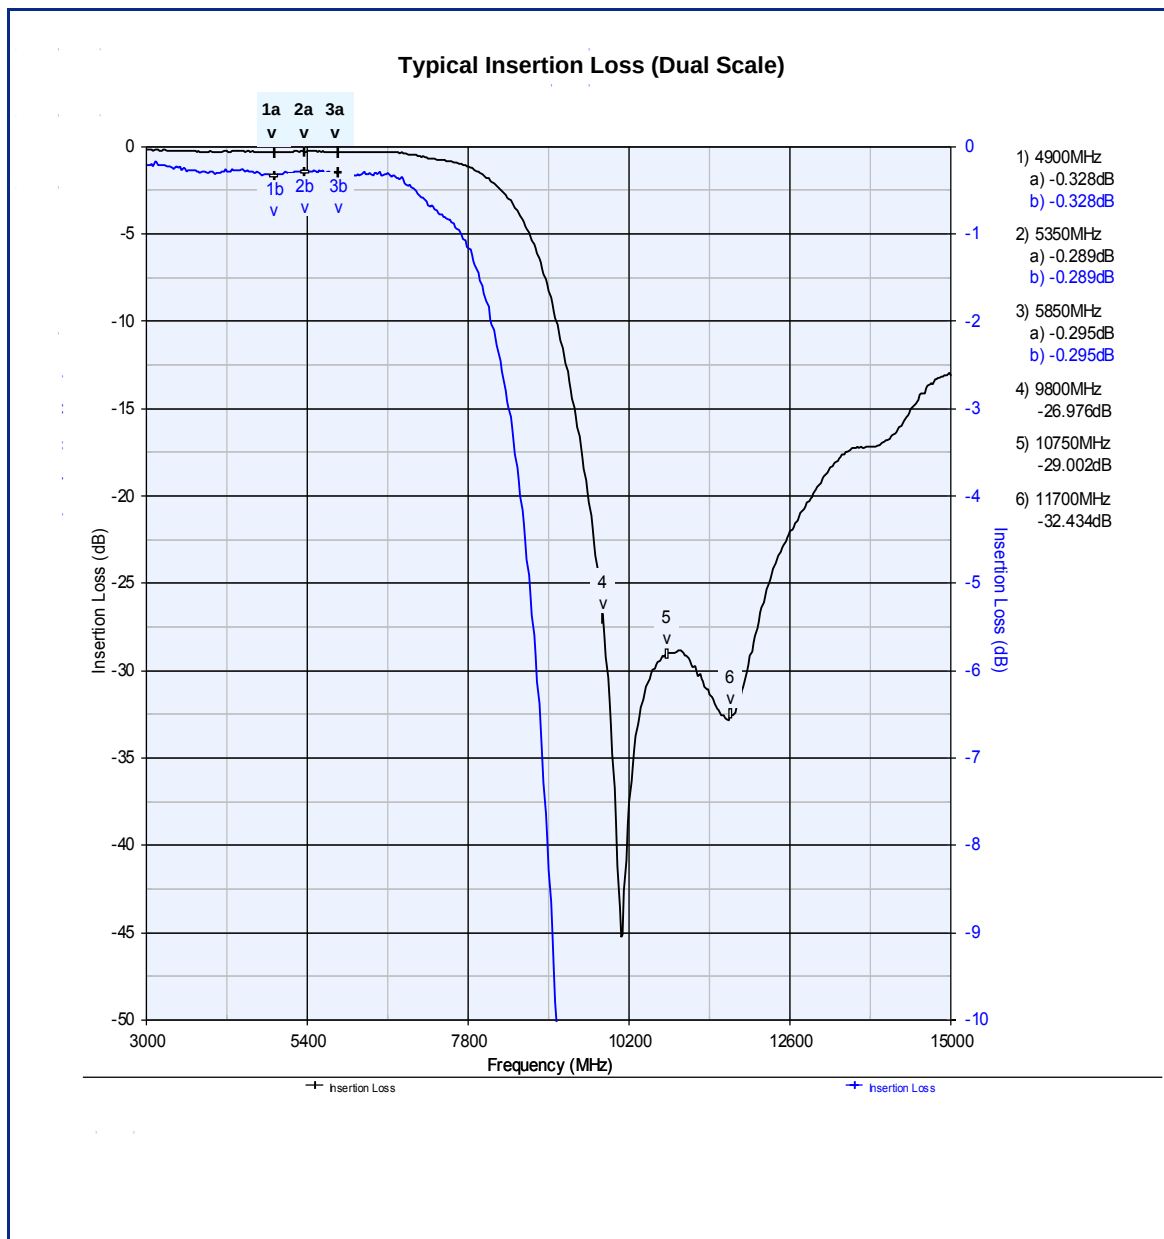

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.