

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Sumida Corporation](#)  
[RCH110NP-100M](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# PIN Power Inductor RCH-110



Halogen Free



### Description

- Ferrite drum core construction.
- Magnetically unshielded.
- L × W × H: 10.5 × 10.5 × 10.5mm Max.
- Product weight: 3.1g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

### Environmental Data

- Operating temperature range: -40°C ~ +100°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +100°C


### Packaging

- Box packaging.


### Applications

- Ideally used in Printers, LCD TV, DVD, Copy Machine, Mainboard of the compounding machines etc. as DC-DC Converter inductors.


### Dimension - [mm]

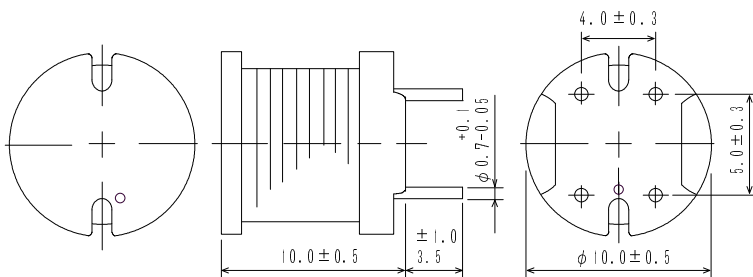

### Schematics - [mm]




(10 μH ~ 33 μH)



(39 μH ~ 1mH)

# PIN Power Inductor RCH-110

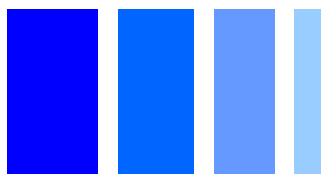

## Electrical Characteristics

PART NO.	STAMP	INDUCTANCE [WITHIN] ※1	D.C.R. (Ω) [MAX.] (at20°C)	RATED CURRENT (A)※2	S.R.F. (MHz) TYP.
RCH110NP-100M	100M	10 μH ± 20%	0.022	5.3	14
RCH110NP-120M	120M	12 μH ± 20%	0.023	4.9	11
RCH110NP-150M	150M	15 μH ± 20%	0.026	4.4	7.7
RCH110NP-180M	180M	18 μH ± 20%	0.033	4.0	7.1
RCH110NP-220M	220M	22 μH ± 20%	0.037	3.6	6.8
RCH110NP-270M	270M	27 μH ± 20%	0.048	3.3	6.1
RCH110NP-330K	330K	33 μH ± 10%	0.055	2.9	6.0
RCH110NP-390K	390K	39 μH ± 10%	0.073	2.7	8.6
RCH110NP-470K	470K	47 μH ± 10%	0.083	2.5	8.1
RCH110NP-560K	560K	56 μH ± 10%	0.092	2.3	7.6
RCH110NP-680K	680K	68 μH ± 10%	0.12	2.1	6.3
RCH110NP-820K	820K	82 μH ± 10%	0.14	1.9	6.0
RCH110NP-101K	101K	100 μH ± 10%	0.16	1.7	5.7
RCH110NP-121K	121K	120 μH ± 10%	0.20	1.5	4.8
RCH110NP-151K	151K	150 μH ± 10%	0.23	1.4	4.2
RCH110NP-181K	181K	180 μH ± 10%	0.31	1.3	3.9
RCH110NP-221K	221K	220 μH ± 10%	0.34	1.1	3.8
RCH110NP-271K	271K	270 μH ± 10%	0.40	1.0	3.4
RCH110NP-331K	331K	330 μH ± 10%	0.52	0.93	2.8
RCH110NP-391K	391K	390 μH ± 10%	0.65	0.86	2.7
RCH110NP-471K	471K	470 μH ± 10%	0.71	0.78	2.5
RCH110NP-561K	561K	560 μH ± 10%	1.0	0.71	2.2
RCH110NP-681K	681K	680 μH ± 10%	1.1	0.65	2.1
RCH110NP-821K	821K	820 μH ± 10%	1.3	0.59	2.0
RCH110NP-102K	102K	1.0 mH ± 10%	1.7	0.53	1.7

※1. Inductance measuring condition : at 1.0kHz













※2. This indicates the value of current when the inductance 10% lower than its initial value or D.C current when ΔT=40°C, whichever is lower (Ta=20°C).

# PIN Power Inductor RCH-110




## Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) —  $\Delta T$

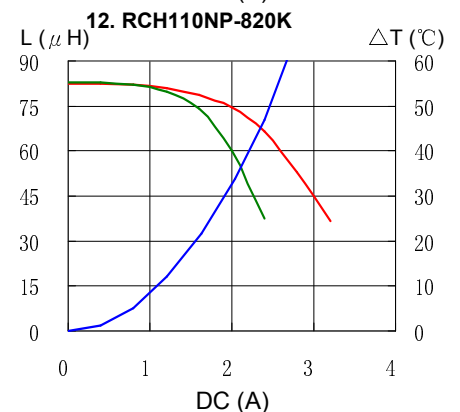
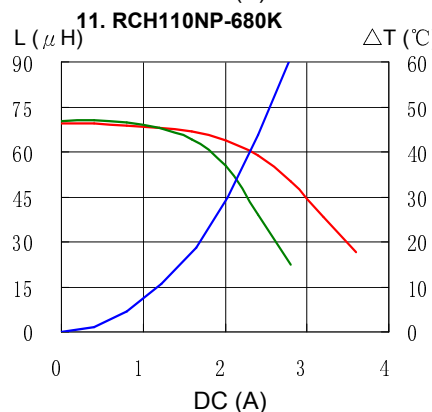
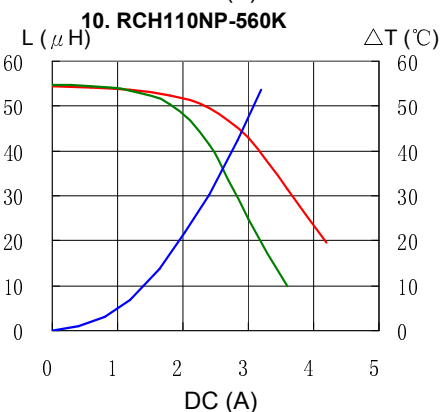
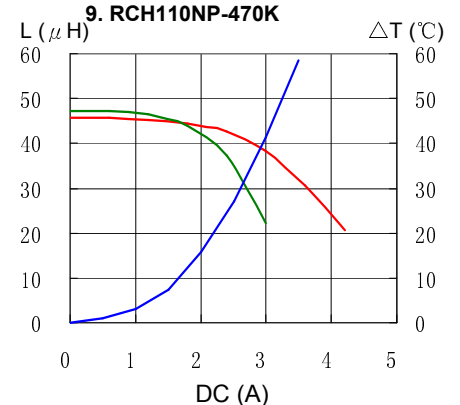
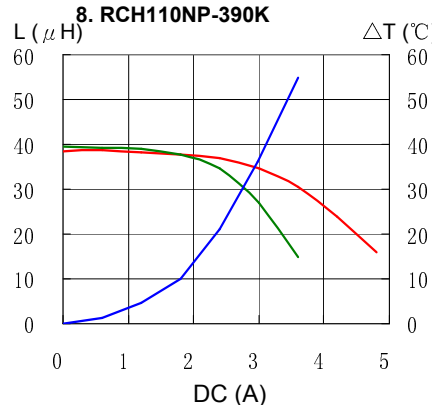
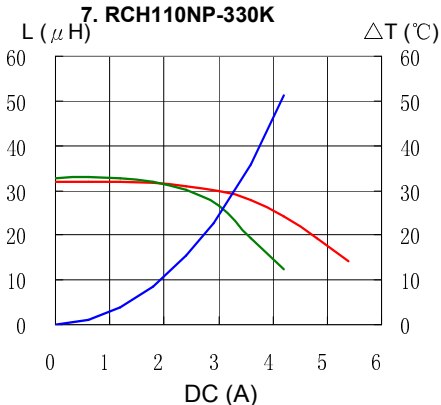
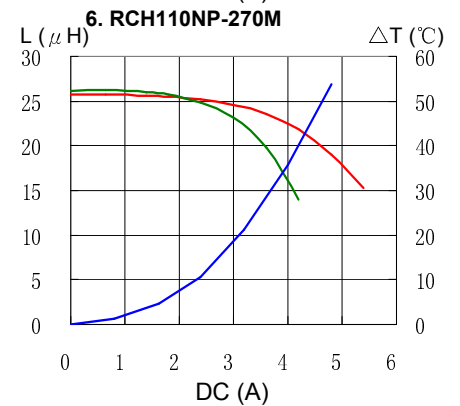
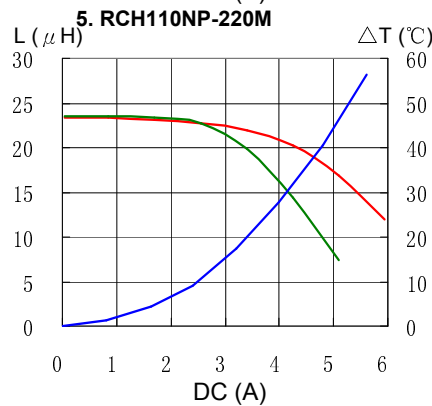
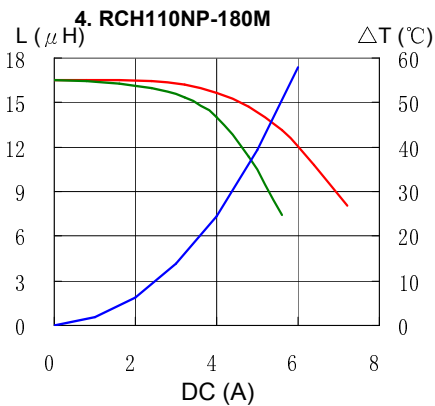
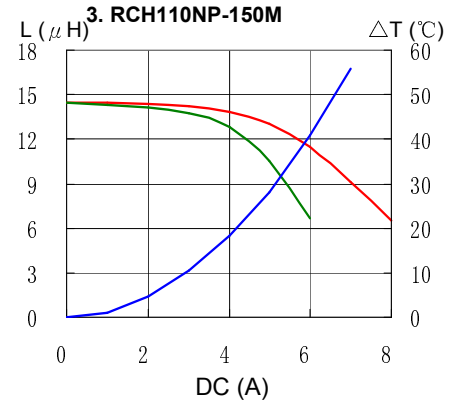
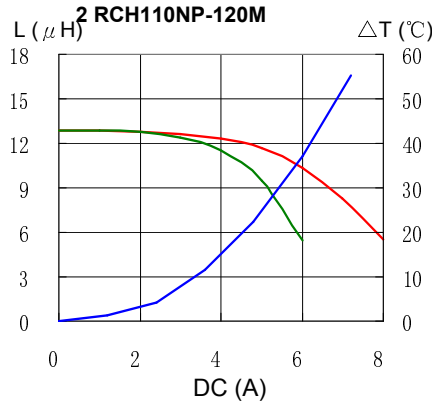
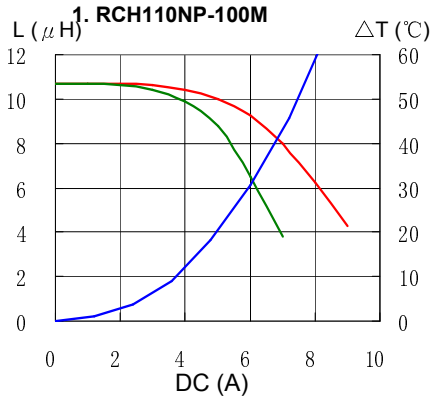


# PIN Power Inductor RCH-110

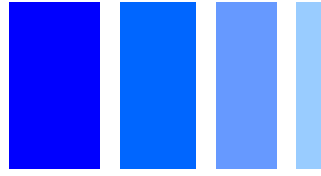

## Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) —  $\Delta T$

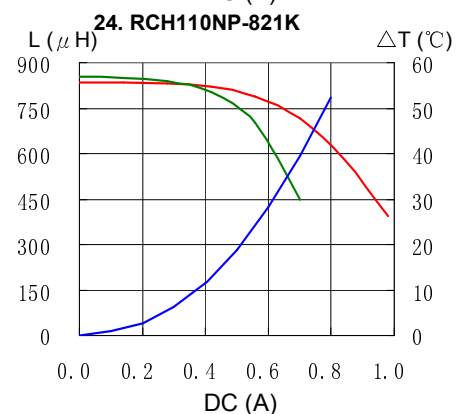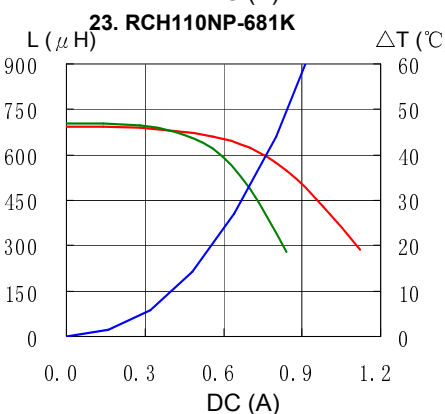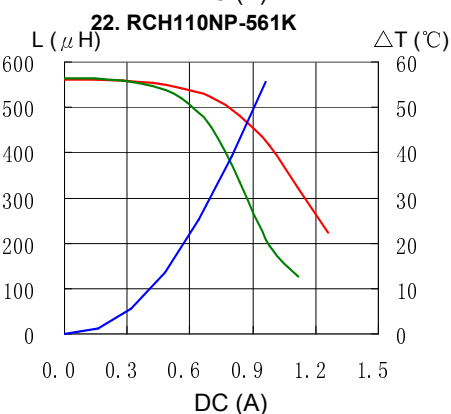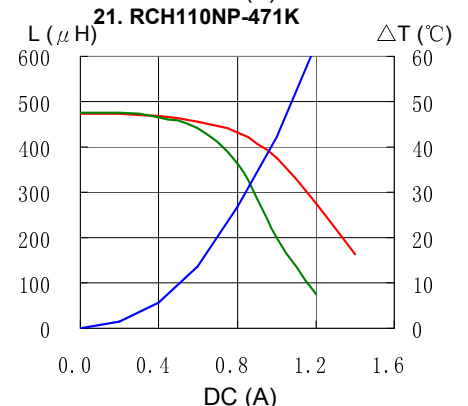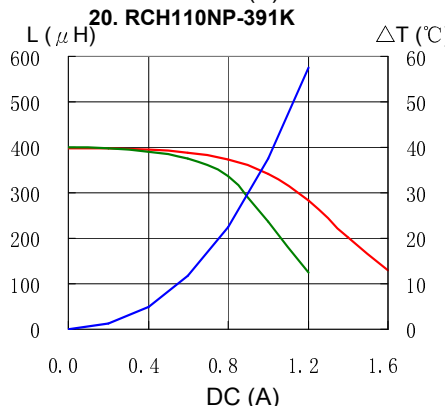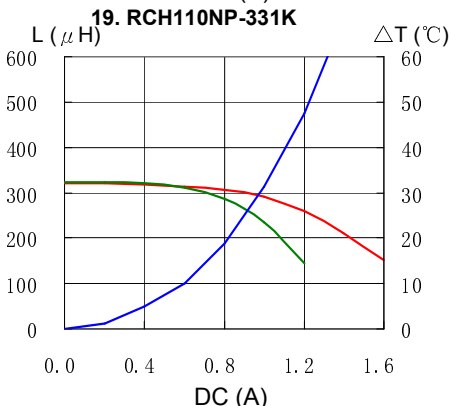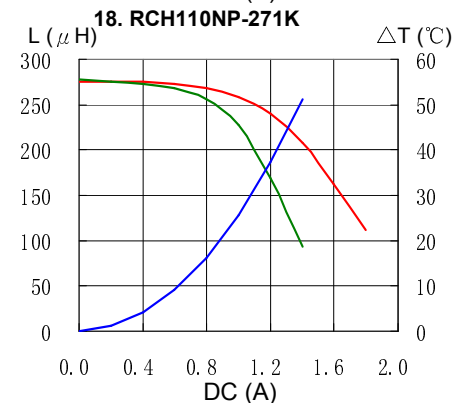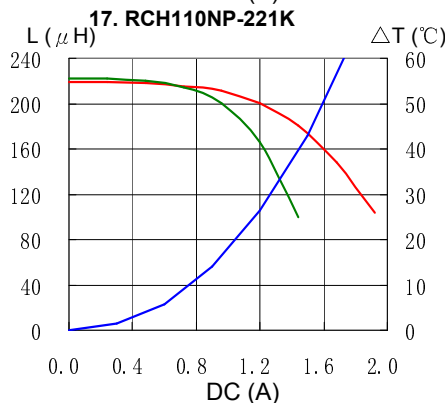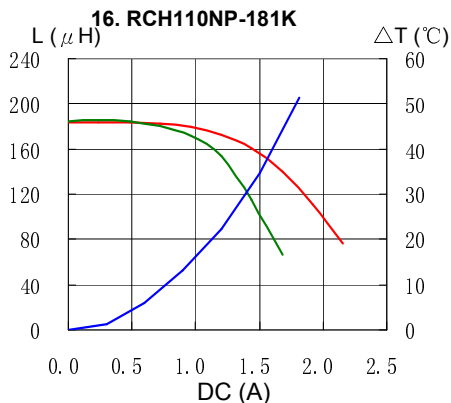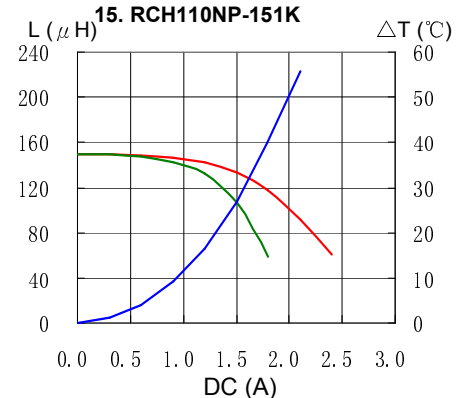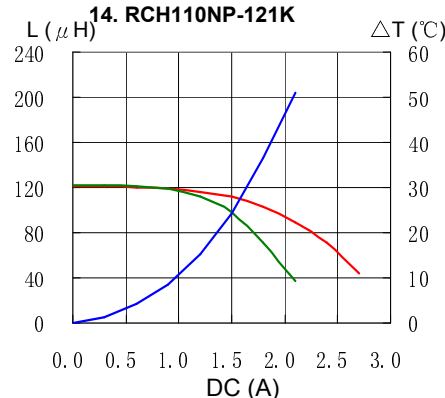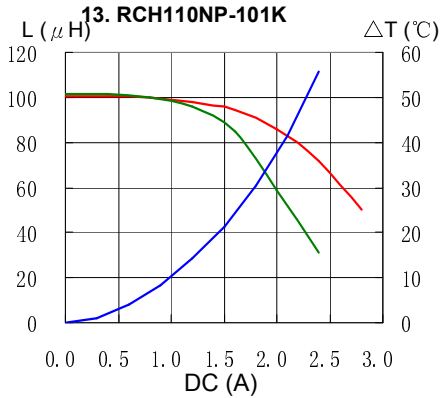


# PIN Power Inductor RCH-110



## Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) —  $\Delta T$

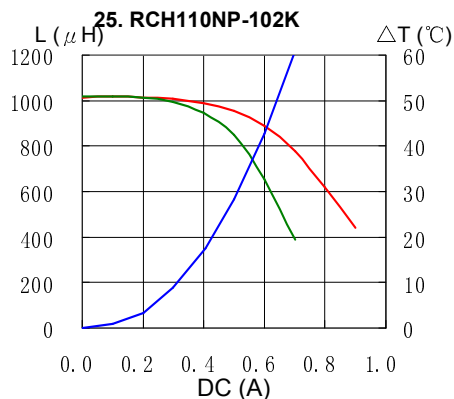

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel. +852-2880-6781  
 FAX. +852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Saitama(Japan)

Tel. +81-48-691-7300  
 FAX. +81-48-691-7340  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel. +1-847-545-6700  
 FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel. +86-21-5836-3299  
 FAX. +86-21-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel. +82-2-6237-0777  
 FAX. +82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Oberzell

Tel. +49-8591-937-0  
 FAX. +49-8591-937-103  
[contact@eu.sumida.com](mailto:contact@eu.sumida.com)

### Shenzhen

Tel. +86-755-8291-0228  
 FAX. +86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel. +65-6296-3388  
 FAX. +65-6841-4426  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel. +49-9181-4509-110  
 FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel. +886-2-8751-2737  
 FAX. +886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel. +1-408-321-9660  
 FAX. +1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)