

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Bel Fuse Inc.](#)
[6605755-1](#)

For any questions, you can email us directly:



sales@integrated-circuit.com

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPERTY OF BEL/STEWART/TRP CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF TRP CONNECTOR.

PRODUCT MAY BE PROTECTED BY ONE OR MORE OF THE FOLLOWING US PATENTS:
6736910-5939955-6426781-6428361-6554638-6840817-7123117
7429195 7717749 7808751 6217391 6149050 7924130

REVISIONS			
REV	DESCRIPTION	DATE	BY
1	EC-1411535 COMPANY LOGO CHANGE	02/20/2016	HY KZ

MECHANICAL:

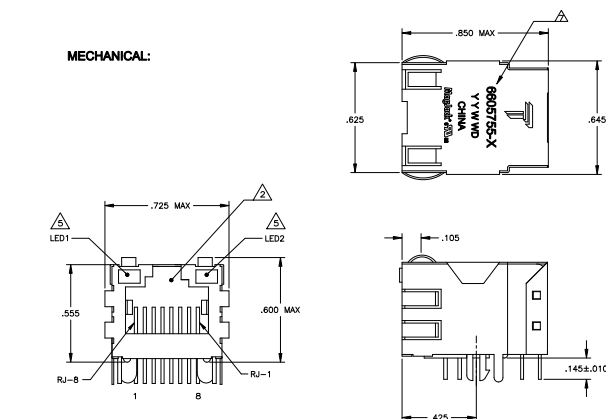

- MATERIALS:**
- HOUSING - THERMOPLASTIC PET POLYESTER FLAMMABILITY RATING UL 94V-0
 - SHIELD - .010" THICK, C26800 BRASS PREPLATED WITH 30μINCH MIN SEMI-BRIGHT NICKEL. SOLDER TABS POST DIPPED WITH 100μINCH MIN SAC SOLDER.
 - MOD JACK CONTACTS - 0.0157" x 0.018" PHOSPHOR BRONZE, 50μINCH MIN OVERALL NICKEL UNDERPLATE, WITH SELECT 50μINCH MIN HARD GOLD FINISH PLATE.
 - SOLDER TABS WITH 100μINCH MIN MATT TIN AND/OR SAC SOLDER DIP.
 - LIGHT EMITTING DIODE(LED) - DIFFUSED EPOXY LENS, .020" x .020" CARBON STEEL WIREFRAME LEADS PRE-PLATED WITH 80μINCH SILVER OVER 40μINCH NICKEL UNDERPLATE OVER 40μINCH COPPER UNDERPLATE, POST-PLATED WITH 100μINCH MIN MATT TIN AND/OR SAC SOLDER DIP OR PURE TIN SOLDER DIP.

RJ45 JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUB PART F.

- MAGNETICS**
- APPLICATION: 10 BASE-T
 - IMPEDANCE: 100 OHMS
 - TURNS RATIO (CHP-CABLE): TX = 11:41 RX = 1:1
 - TRANSMIT OPEN CIRCUIT INDUCTANCE (OCIL): 140nH MIN @ 100kHz, 0.1VRMS
 - LEAKAGE INDUCTANCE (LL): 0.4μH MAX @ 100kHz, 0.1VRMS
 - INTERWINDING CAPACITANCE (CWI): 12pF MAX @ 100kHz, 0.1VRMS
 - ISOLATION VOLTAGE: 1500VAC (MAX) AT 60Hz FOR 60 SECS.

4. OPERATING TEMPERATURE: FROM 0° TO +70°C.

- IF THE LED WITH 250 OHM RESISTORS, LED IS DRIVEN WITH 5V VOLTAGE AND THE MAX OPERATING CURRENT IS 20mA.**
- LED COLOR : DOMINANT WAVELENGTH (λD): GREEN 568 nm TYP. @ VF=5V
FORWARD CURRENT (IF): GREEN 12 mA TYP. @ VF=5V
DOMINANT WAVELENGTH (λD): YELLOW 588 nm TYP. @ VF=5V
FORWARD CURRENT (IF): YELLOW 13 mA TYP. @ VF=5V


INDICATED CONNECTIONS ARE FOR NIC CONFIGURATION.

TRP CONNECTOR LOGO, PART NUMBER, DATE CODE, COUNTRY OF ORIGIN AND AGENCY APPROVAL MARKING IN APPROXIMATE LOCATION SHOWN.

THESE PARTS ARE RECOMMENDED FOR WAVE SOLDERING PROCESS. PREHEAT TEMPERATURE IS 120°C TO 160°C, 10 SECONDS TO 180 SECONDS, PEAK WAVE SOLDERING TEMPERATURE IS 260°C MAX, 10 SECONDS MAX.

ELECTRICAL:

725 SERIES MAGNETIC CIRCUIT

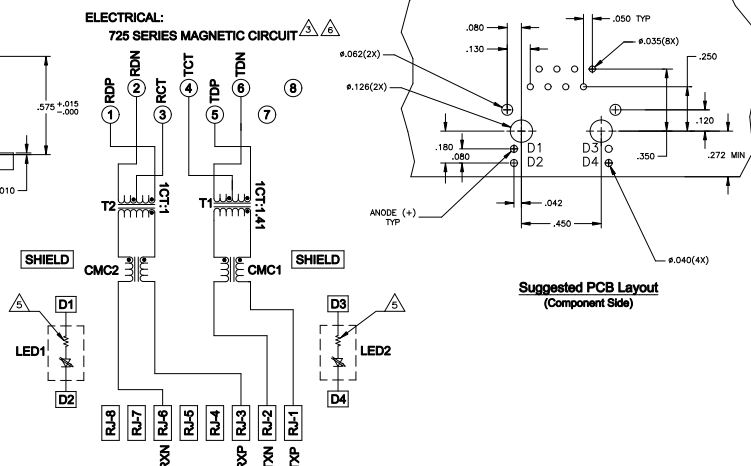

**Suggested PCB Layout
(Component Side)**

OBsolete	GREEN	GREEN	+	6605755-1
GREEN	YELLOW	YELLOW	6605755-1	
LED1	LED2	PART NUMBER		

THIS DRAWING IS A CONTROLLED DOCUMENT.		REV. 0001		DONGGUAN CHINA	
REVISION	DATE	BY	APPROVED	DATE	BY
1	10/20/2010	HY	KZ	10/20/2010	HY
2	10/20/2010	HY	KZ	10/20/2010	HY
3	10/20/2010	HY	KZ	10/20/2010	HY
4	10/20/2010	HY	KZ	10/20/2010	HY
5	10/20/2010	HY	KZ	10/20/2010	HY
6	10/20/2010	HY	KZ	10/20/2010	HY
7	10/20/2010	HY	KZ	10/20/2010	HY
8	10/20/2010	HY	KZ	10/20/2010	HY
9	10/20/2010	HY	KZ	10/20/2010	HY
10	10/20/2010	HY	KZ	10/20/2010	HY
11	10/20/2010	HY	KZ	10/20/2010	HY
12	10/20/2010	HY	KZ	10/20/2010	HY
13	10/20/2010	HY	KZ	10/20/2010	HY
14	10/20/2010	HY	KZ	10/20/2010	HY
15	10/20/2010	HY	KZ	10/20/2010	HY
16	10/20/2010	HY	KZ	10/20/2010	HY
17	10/20/2010	HY	KZ	10/20/2010	HY
18	10/20/2010	HY	KZ	10/20/2010	HY
19	10/20/2010	HY	KZ	10/20/2010	HY
20	10/20/2010	HY	KZ	10/20/2010	HY
21	10/20/2010	HY	KZ	10/20/2010	HY
22	10/20/2010	HY	KZ	10/20/2010	HY
23	10/20/2010	HY	KZ	10/20/2010	HY
24	10/20/2010	HY	KZ	10/20/2010	HY
25	10/20/2010	HY	KZ	10/20/2010	HY
26	10/20/2010	HY	KZ	10/20/2010	HY
27	10/20/2010	HY	KZ	10/20/2010	HY
28	10/20/2010	HY	KZ	10/20/2010	HY
29	10/20/2010	HY	KZ	10/20/2010	HY
30	10/20/2010	HY	KZ	10/20/2010	HY
31	10/20/2010	HY	KZ	10/20/2010	HY
32	10/20/2010	HY	KZ	10/20/2010	HY
33	10/20/2010	HY	KZ	10/20/2010	HY
34	10/20/2010	HY	KZ	10/20/2010	HY
35	10/20/2010	HY	KZ	10/20/2010	HY
36	10/20/2010	HY	KZ	10/20/2010	HY
37	10/20/2010	HY	KZ	10/20/2010	HY
38	10/20/2010	HY	KZ	10/20/2010	HY
39	10/20/2010	HY	KZ	10/20/2010	HY
40	10/20/2010	HY	KZ	10/20/2010	HY
41	10/20/2010	HY	KZ	10/20/2010	HY
42	10/20/2010	HY	KZ	10/20/2010	HY
43	10/20/2010	HY	KZ	10/20/2010	HY
44	10/20/2010	HY	KZ	10/20/2010	HY
45	10/20/2010	HY	KZ	10/20/2010	HY
46	10/20/2010	HY	KZ	10/20/2010	HY
47	10/20/2010	HY	KZ	10/20/2010	HY
48	10/20/2010	HY	KZ	10/20/2010	HY
49	10/20/2010	HY	KZ	10/20/2010	HY
50	10/20/2010	HY	KZ	10/20/2010	HY
51	10/20/2010	HY	KZ	10/20/2010	HY
52	10/20/2010	HY	KZ	10/20/2010	HY
53	10/20/2010	HY	KZ	10/20/2010	HY
54	10/20/2010	HY	KZ	10/20/2010	HY
55	10/20/2010	HY	KZ	10/20/2010	HY
56	10/20/2010	HY	KZ	10/20/2010	HY
57	10/20/2010	HY	KZ	10/20/2010	HY
58	10/20/2010	HY	KZ	10/20/2010	HY
59	10/20/2010	HY	KZ	10/20/2010	HY
60	10/20/2010	HY	KZ	10/20/2010	HY
61	10/20/2010	HY	KZ	10/20/2010	HY
62	10/20/2010	HY	KZ	10/20/2010	HY
63	10/20/2010	HY	KZ	10/20/2010	HY
64	10/20/2010	HY	KZ	10/20/2010	HY
65	10/20/2010	HY	KZ	10/20/2010	HY
66	10/20/2010	HY	KZ	10/20/2010	HY
67	10/20/2010	HY	KZ	10/20/2010	HY
68	10/20/2010	HY	KZ	10/20/2010	HY
69	10/20/2010	HY	KZ	10/20/2010	HY
70	10/20/2010	HY	KZ	10/20/2010	HY
71	10/20/2010	HY	KZ	10/20/2010	HY
72	10/20/2010	HY	KZ	10/20/2010	HY
73	10/20/2010	HY	KZ	10/20/2010	HY
74	10/20/2010	HY	KZ	10/20/2010	HY
75	10/20/2010	HY	KZ	10/20/2010	HY
76	10/20/2010	HY	KZ	10/20/2010	HY
77	10/20/2010	HY	KZ	10/20/2010	HY
78	10/20/2010	HY	KZ	10/20/2010	HY
79	10/20/2010	HY	KZ	10/20/2010	HY
80	10/20/2010	HY	KZ	10/20/2010	HY
81	10/20/2010	HY	KZ	10/20/2010	HY
82	10/20/2010	HY	KZ	10/20/2010	HY
83	10/20/2010	HY	KZ	10/20/2010	HY
84	10/20/2010	HY	KZ	10/20/2010	HY
85	10/20/2010	HY	KZ	10/20/2010	HY
86	10/20/2010	HY	KZ	10/20/2010	HY
87	10/20/2010	HY	KZ	10/20/2010	HY
88	10/20/2010	HY	KZ	10/20/2010	HY
89	10/20/2010	HY	KZ	10/20/2010	HY
90	10/20/2010	HY	KZ	10/20/2010	HY
91	10/20/2010	HY	KZ	10/20/2010	HY
92	10/20/2010	HY	KZ	10/20/2010	HY
93	10/20/2010	HY	KZ	10/20/2010	HY
94	10/20/2010	HY	KZ	10/20/2010	HY
95	10/20/2010	HY	KZ	10/20/2010	HY
96	10/20/2010	HY	KZ	10/20/2010	HY
97	10/20/2010	HY	KZ	10/20/2010	HY
98	10/20/2010	HY	KZ	10/20/2010	HY
99	10/20/2010	HY	KZ	10/20/2010	HY
100	10/20/2010	HY	KZ	10/20/2010	HY