

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Fairchild Semiconductor](#)

[GMA46881C](#)

For any questions, you can email us directly:


[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



## 1.85 INCH (47.0)mm) 8 X 8 DOT MATRIX STICK DISPLAY

**HER Red / Green GMA46881C  
(BI-COLOR)**

### PACKAGE DIMENSIONS

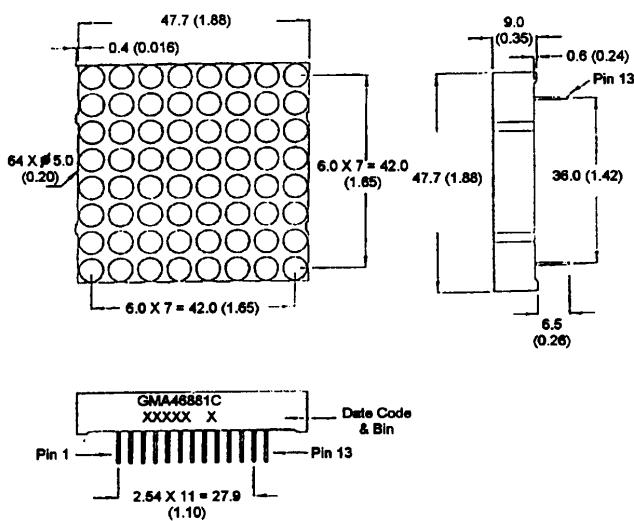

### DESCRIPTION

The GMA46881C is a common cathode column 8 X 8, bicolor High Efficiency Red / green dotmatrix display. The GMA47881C is a 8 X 8 populated with super bright AlInGaP yellow LEDs. Both have grey faces with neutral segment color.

### FEATURES

**1.85" ( 47.0mm) character height.**  
**Low power requirement.**  
**Wide 130° viewing angle.**  
**High brightness and contrast**  
**8 X 8 array with X-Y select.**  
**X-Y stackable.**  
**Easy mounting on P.C. board.**

**NOTE:** Dimensions are in mm (inch).  
Tolerances are  $\pm 0.25$  (0.1) unless otherwise noted.  
All pins are 0.5 (.02).

### MODEL NUMBER

<u>Part Number</u>	<u>Colour</u>	<u>Description</u>
GMA46881C	HER Red/Green	Common anode row.
(For other color options, contact your local area Sales Office)		



## 1.85 INCH (47.0)mm) 8 X 8 DOT MATRIX STICK DISPLAY

### ABSOLUTE MAXIMUM RATING ( $T_A = 25^\circ\text{C}$ unless otherwise specified)

	HER	Green	Units
Peak forward current per segment (Duty cycle 1/10, 10KHz)	90	90	mA
Continous IF per segment	25	25	mA
Power dissipation per segment	70*	70*	mW
*Derate linearly from $25^\circ\text{C}$	0.33	0.33	mW/ $^\circ\text{C}$
Reverse voltage VR per segment	5	5	Volts
Operating and storage temperature range.....			-25 $^\circ\text{C}$ to +85 $^\circ\text{C}$
Soldering time at 260 $^\circ\text{C}$ ..... (1/16" below seating plane)			3 sec

### ELECTRO - OPTICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise specified)

	HER	Green	Test Condition
Luminous Intensity/Dot			
Digit average (Typical)	2200ucd	1600ucd	$I_F = 20\text{mA}$
Forward voltage ( $V_F$ )			
typical	2.0V	2.1V	$I_F = 20\text{ mA}$
maximum	2.8V	2.8V	$I_F = 20\text{ mA}$
Peak wavelength (nm)	635nm	570nm	$I_F = 20\text{ mA}$
Spectral line half width (nm)	45nm	30nm	$I_F = 20\text{mA}$
Reverse breakdown voltage $V_R$	5V	5V	$I_R = 100\text{uA}$



**1.85 INCH (47.0)mm) 8 X 8  
DOT MATRIX STICK DISPLAY**

**PIN CONNECTION:**


**GMA46881C**

Pin Number	Function	Pin Number	Function
1	Anode Row 2	13	Anode Row 7
2	Cathode Column 2b	14	Cathode Column 7b
3	Cathode Column 2a	15	Cathode Column 7a
4	Anode Row 4	16	Anode Row 4
5	Cathode Column 4b	17	Cathode Column 5b
6	Cathode Column 4a	18	Cathode Column 5a
7	Anode Row 6	19	Anode Row 3
8	Cathode Column 6b	20	Cathode Column 3b
9	Cathode Column 6a	21	Cathode Column 3a
10	Anode Row 8	22	Anode Row 1
11	Cathode Column 8b	23	Cathode Column 1b
12	Cathode Column 8a	24	Cathode Column 1a

Note "a" = High Efficiency Red LED

"b" = Green LED

**SCHEMATIC:**

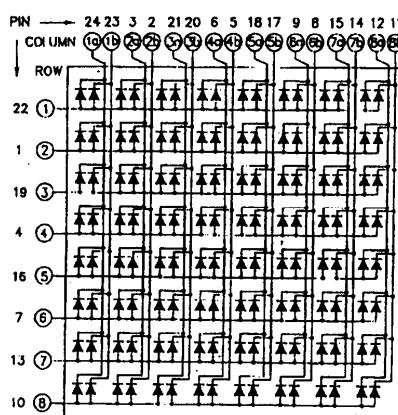



## 1.85 INCH (47.0)mm) 8 X 8 DOT MATRIX STICK DISPLAY

### GRAPHICAL DETAIL: High Efficiency Red ( $T_A = 25^\circ\text{C}$ unless otherwise specified)

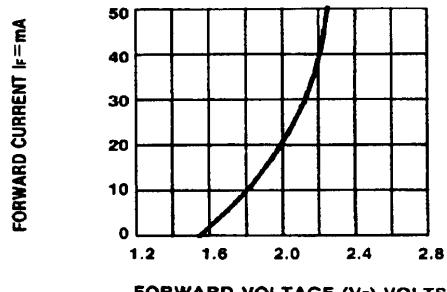


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE.

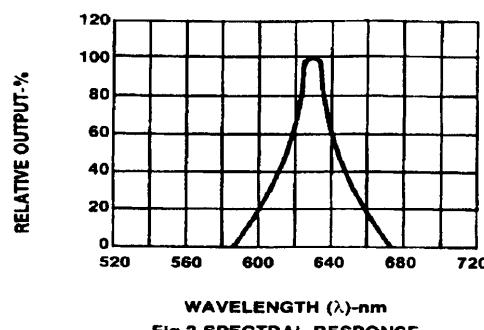


Fig.2 SPECTRAL RESPONSE

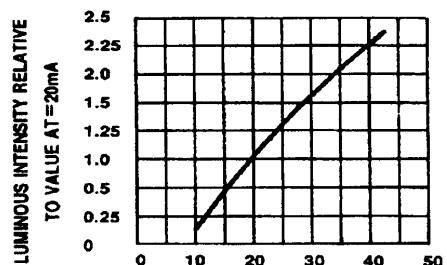


Fig.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

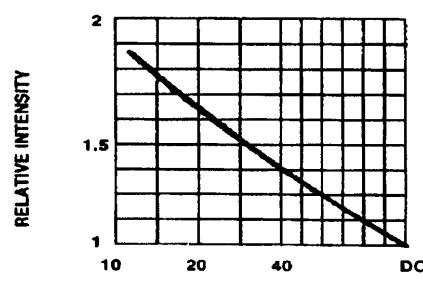


Fig.5 LUMINOUS INTENSITY VS. DUTY CYCLE

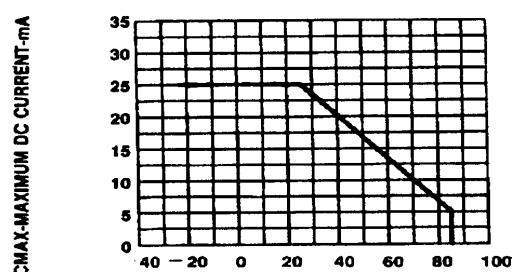


Fig.4 MAXIMUM ALLOWABLE DC CURRENT PER SEGMENT VS. A FUNCTION OF AMBIENT TEMPERATURE.

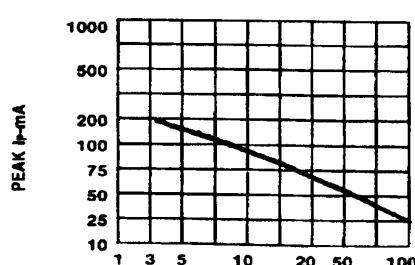


Fig.6 MAX PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE  $f = 1$  KHz)



## 1.85 INCH (47.0)mm) 8 X 8 DOT MATRIX STICK DISPLAY

### GRAPHICAL DETAIL: Green ( $T_A = 25^\circ\text{C}$ unless otherwise specified)

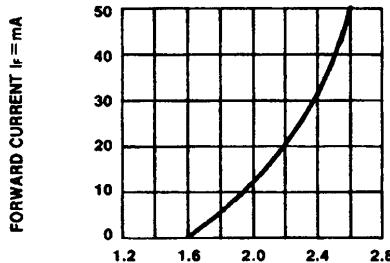


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE.

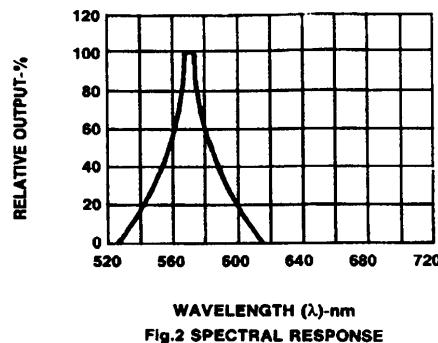


Fig.2 SPECTRAL RESPONSE

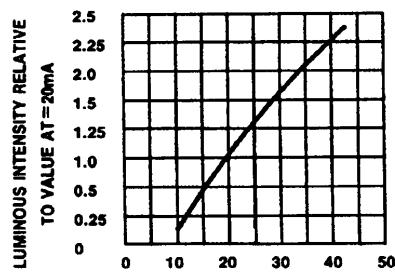


Fig.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

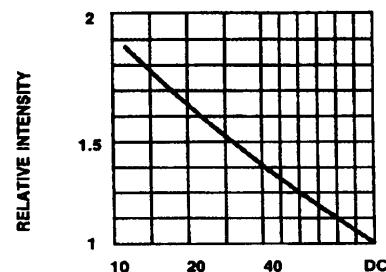


Fig.5 LUMINOUS INTENSITY VS. DUTY CYCLE

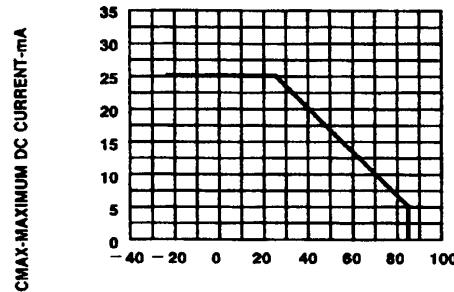


Fig.4 MAXIMUM ALLOWABLE DC CURRENT PER SEGMENT CS. A FUNCTION OF AMBIENT TEMPERATURE.

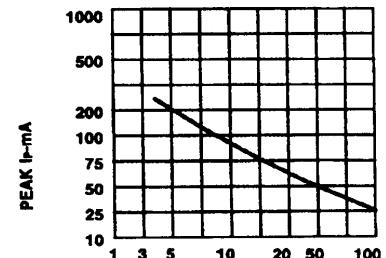


Fig. 6 MAX PEAK CURRENT VS. DUTY CYCLE %  
(REFRESH RATE  $f=1$  KHz)



## 1.85 INCH (47.0 mm) 8 X 8 DOT MATRIX STICK DISPLAY

### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.