

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[200MSP3T1B6M7RE](#)

For any questions, you can email us directly:



sales@integrated-circuit.com

SHEET 1 OF 1



CIRCUIT: SPDT
CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	OFF	ON
2-3	OPEN	2-1

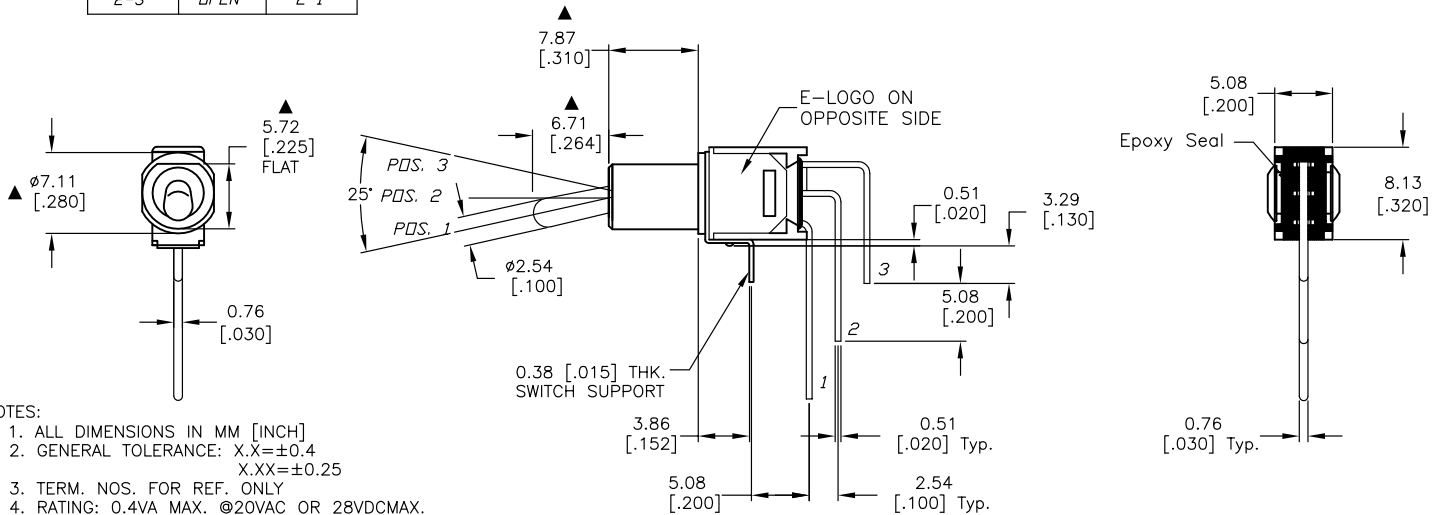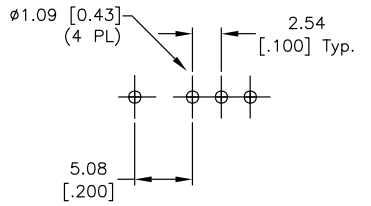

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4VA MAX. @20VAC OR 28VDCMAX.
5. FIXED TERMINAL & MOVING CONTACT: COPPER ALLOY
W/GOLD PLATE OVER NICKEL PLATE.
6. ELECTRICAL LIFE: 30,000 MAKE-AND-BREAK CYCLE
AT FULL LOAD.
7. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
8. OPERATING TEMP.: -30°C to 85°C
9. ▲ DENOTES CRITICAL PARAMETER.

					E-SWITCH®				
A	14248	RELEASED FOR PRODUCTION	8/18/04	AR	TITLE 200MSP3T1B6M7RE				
REV.	ECN No.	DESCRIPTION	DATE	CHKD	SCALE 2:1 DATE 8/18/04 DR AR DWG T213020 REV A				
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED									