

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[200MSP4T2B1M1QE](#)

For any questions, you can email us directly:

sales@integrated-circuit.com






CIRCUIT: SPDT
CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
<DN>	OFF	<DN>
2-3	DPEN	2-1

<DN> = MOMENTARY

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NO.'S. FOR REF. ONLY
4. CONTACT RATING: 3A @120 VAC OR 28VDC, 1A @250VAC
5. ELECTRIC LIFE: 30,000 make-and-break cycles at full load.
6. INSULATION RESISTANCE: 1,000 M ohm min.
7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
8. OPERATING TEMP.: -30°C to 85°C
9. ▲ DENOTES CRITICAL PARAMETER.
10. 2002/95/EC (ROHS) COMPLANT

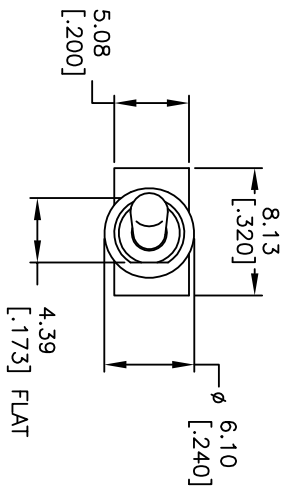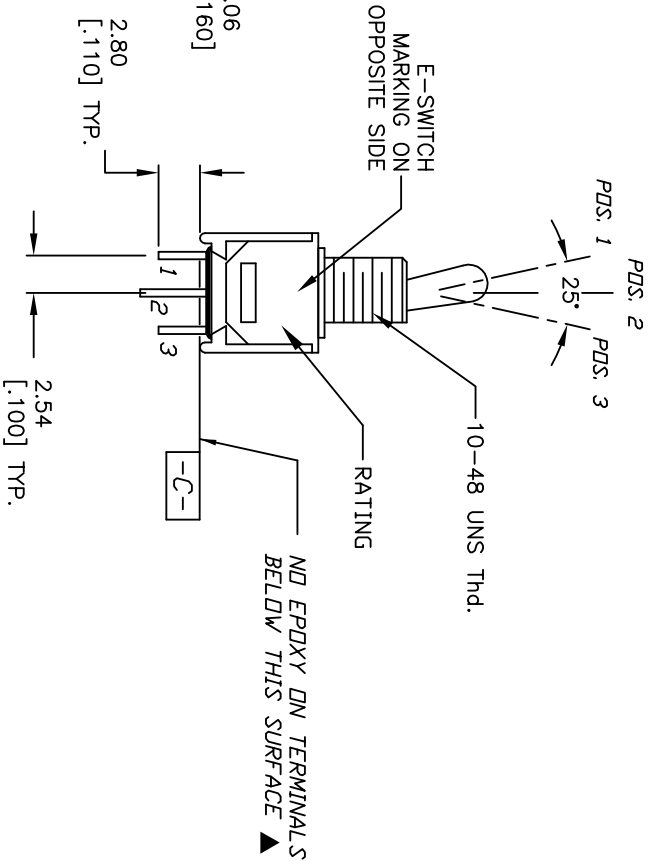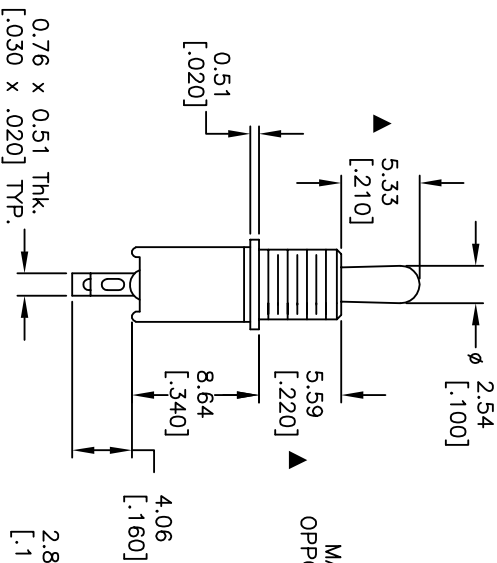

B	19387	TERMINALS DRAWN AS M, UPDATES	10/27/10	BLR
A	13118	RELEASED FOR PRODUCTION	5/8/03	AR
REV.	PCR No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

TITLE		E-SWITCH®		LAMB INDUSTRIES	
200MSP4T2B1M1QE		DATE		DR	
2:1		5/8/03		AR	
SCALE		DWG		REV	
2:1		T221002		B	