

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[LL3301SPF065QJ](#)





For any questions, you can email us directly:

sales@integrated-circuit.com

SHEET 1 OF 1

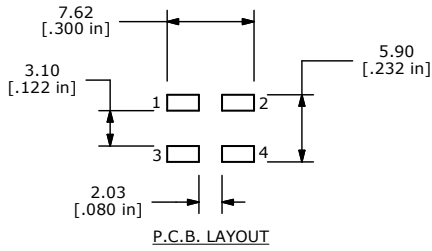

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. RATING: 12VDC, 50mA
 - ▲ 5. OPERATING FORCE: 65 ± 20 GRAMS
 6. TRAVEL: 0.25mm +0.2 / -0.1
 7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
 8. LIFE: 5 MILLION CYCLES
 - ▲ 9. SILVER CONTACTS
 - ▲ 10. PACKAGE: TAPE & REEL, 750 PIECES PER
 11. ▲ DENOTES CRITICAL PARAMETER
 12. 2002/95/EC (ROHS) COMPLIANT

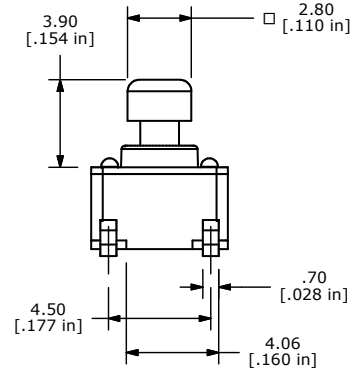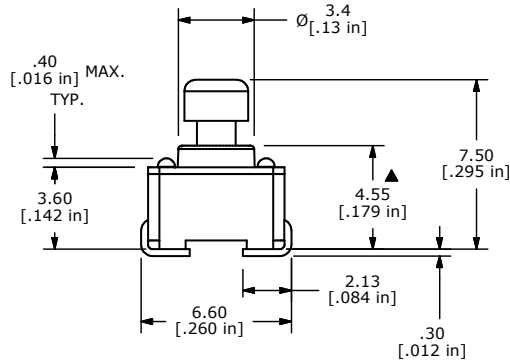

E-SWITCH®



TITLE LL3301SPF065QJ

A	18645	RELEASED FOR PRODUCTION	9/21/09	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 4:1

DATE 9/21/2009

DR BLR

DWG P010466

REV A