

## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[Fairchild Semiconductor](#)

[QVL25335](#)


For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

**PACKAGE DIMENSIONS**

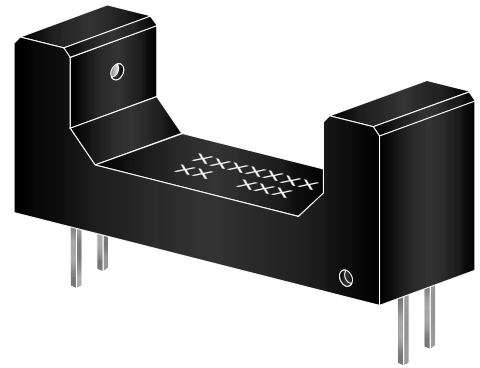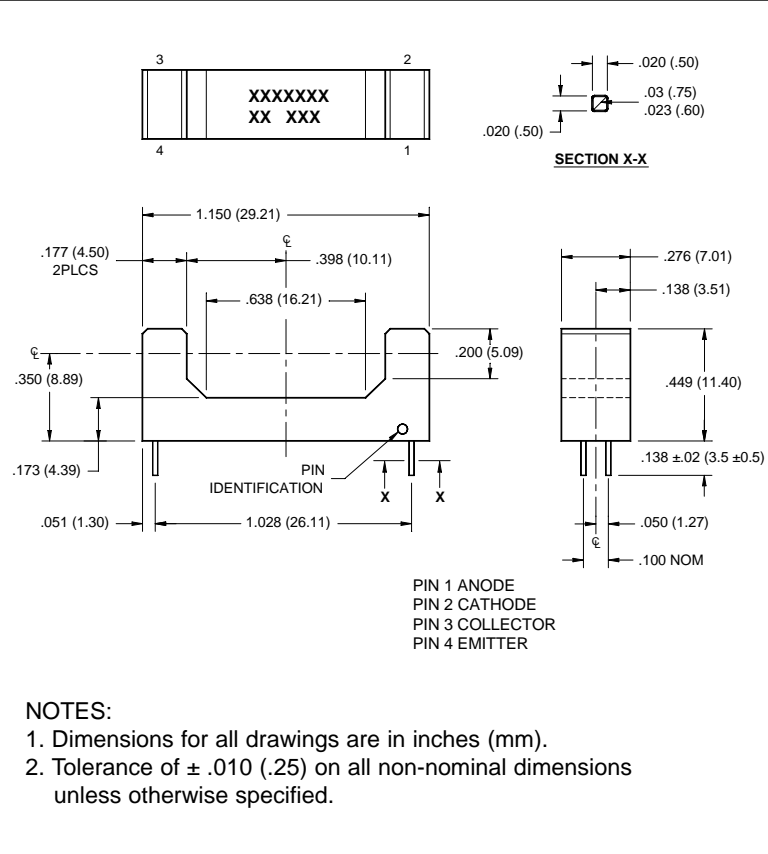

**SCHEMATIC**

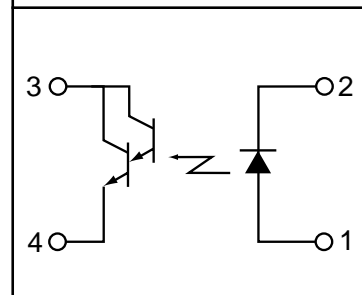

**DESCRIPTION**

The QVL25335 consists of an infrared light emitting diode coupled to an NPN silicon photodarlington packaged into an injection molded housing.

**FEATURES**

- 20 mm wide gap
- PC Board mount
- .060" apertures
- Sensor filter to attenuate visible light
- High CTR



# SLOTTED OPTICAL SWITCH

## QVL25335

### ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub> = 25°C unless otherwise specified)

Parameter	Symbol	Rating	Unit
Operating Temperature	T <sub>OPR</sub>	-40 to +85	°C
Storage Temperature	T <sub>STG</sub>	-40 to +85	°C
Soldering Temperature (Iron) <sup>(2,3 and 4)</sup>	T <sub>SOL-I</sub>	240 for 5 sec	°C
Soldering Temperature (Flow) <sup>(2 and 3)</sup>	T <sub>SOL-F</sub>	260 for 10 sec	°C
<b>INPUT (EMITTER)</b>			
Continuous Forward Current	I <sub>F</sub>	50	mA
Reverse Voltage	V <sub>R</sub>	6	V
Power Dissipation <sup>(1)</sup>	P <sub>D</sub>	100	mW
<b>OUTPUT (SENSOR)</b>			
Collector to Emitter Voltage	V <sub>CEO</sub>	30	V
Emitter to Collector Voltage	V <sub>ECO</sub>	6	V
Collector Current	I <sub>C</sub>	40	mA
Power Dissipation <sup>(1)</sup>	P <sub>D</sub>	150	mW

#### NOTES:

1. Derate power dissipation linearly 1.67 mW/°C above 25°C.
2. RMA flux is recommended.
3. Methanol or isopropanol alcohols are recommended as cleaning agents.
4. Soldering iron tip 1/16" (1.6 mm) minimum from housing.

### ELECTRICAL / OPTICAL CHARACTERISTICS (T<sub>A</sub> =25°C)

PARAMETER	TEST CONDITIONS	SYMBOL	MIN	TYP	MAX	UNITS
<b>INPUT (EMITTER)</b>						
Forward Voltage	I <sub>F</sub> = 20 mA	V <sub>F</sub>	—	—	1.7	V
Reverse Leakage Current	V <sub>R</sub> = 5 V	I <sub>R</sub>	—	—	100	µA
<b>OUTPUT (SENSOR)</b>						
Emitter to Collector Breakdown	I <sub>E</sub> = 100 µA	BV <sub>ECO</sub>	6	—	—	V
Collector to Emitter Breakdown	I <sub>C</sub> = 1 mA	BV <sub>CEO</sub>	30	—	—	V
Collector to Emitter Leakage	V <sub>CE</sub> = 10 V	I <sub>CEO</sub>	—	—	100	nA
<b>COUPLED</b>						
On-State Collector Current	I <sub>F</sub> = 10 mA, V <sub>CE</sub> = 5 V	I <sub>C(ON)</sub>	5.0	—	—	mA
Saturation Voltage	I <sub>F</sub> = 10 mA, I <sub>C</sub> = 2 mA	V <sub>CE(SAT)</sub>	—	—	1.0	V



## SLOTTED OPTICAL SWITCH

**QVL25335**

### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.