

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)  
[0022035055](#)

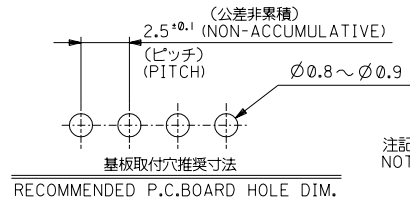
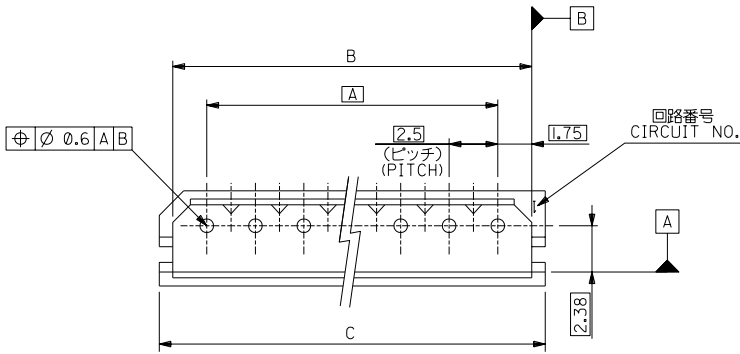
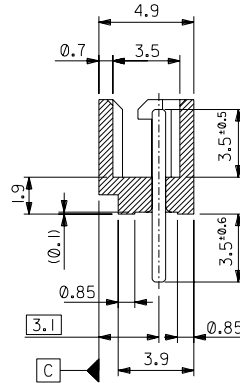
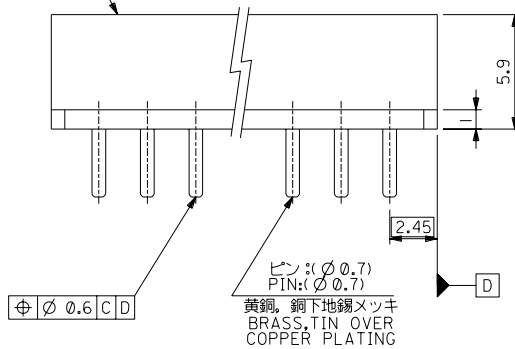
For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

DWG. NO. SD-5267-NA

E

D

C  
B  
A  
DIMENSIONS IN METRIC DO NOT SCALE DRAWING注記  
NOTES:I. 嵌合相手: 5264 シリーズ  
MATES WITH: 5264 SERIES.ウエハー: 66ナイロン, ガラス入り, UL94V-0  
WAFFER: 66NYLON, GLASS REINFORCED, UL94V-0

|      |      |      |            |          |                  |
|------|------|------|------------|----------|------------------|
| 39.9 | 38.5 | 35   | 22-03-5155 | 5267-15A | 15               |
| 37.4 | 36   | 32.5 | -5145      | -14A     | 14               |
| 34.9 | 33.5 | 30   | -5135      | -13A     | 13               |
| 32.4 | 31   | 27.5 | -5125      | -12A     | 12               |
| 29.9 | 28.5 | 25   | -5115      | -11A     | 11               |
| 27.4 | 26   | 22.5 | -5105      | -10A     | 10               |
| 24.9 | 23.5 | 20   | -5095      | -09A     | 9                |
| 22.4 | 21   | 17.5 | -5085      | -08A     | 8                |
| 19.9 | 18.5 | 15   | -5075      | -07A     | 7                |
| 17.4 | 16   | 12.5 | -5065      | -06A     | 6                |
| 14.9 | 13.5 | 10   | -5055      | -05A     | 5                |
| 12.4 | 11   | 7.5  | -5045      | -04A     | 4                |
| 9.9  | 8.5  | 5    | -5035      | -03A     | 3                |
| 7.4  | 6    | 2.5  | 22-03-5025 | 5267-02A | 2                |
| C    | B    | A    | EDP NO.    | ENG. NO. | 極数<br>NO OF CKT. |

|                            |       |           |                         |             |          |
|----------------------------|-------|-----------|-------------------------|-------------|----------|
| 角度 ANGLE                   | +3°   |           |                         |             |          |
| 30°以上<br>OVER              | +0.3  | B         | 変更<br>REVISED (JC60688) | Y.M.        | 96/3/26  |
| 10°以上 30°未満<br>OVER UNDER  | +0.25 | A         | 変更<br>(J10590)          | Y.M.        | 91/7/26  |
| 10°未満<br>UNDER             | +0.2  | 0         | 新規作成 (J80546)           | Y.M.        | 96/20/88 |
| 一般公差<br>GENERAL TOLERANCES |       | 記号<br>LTR | 変更内容<br>REVISION RECORD | DR.<br>CHK. | DATE     |

|                                      |                           |                                 |                    |                              |                               |                        |          |
|--------------------------------------|---------------------------|---------------------------------|--------------------|------------------------------|-------------------------------|------------------------|----------|
| 材料<br>MATERIAL                       | 仕上げ<br>FINISH             | 適用電線範囲<br>WIRE RANGE            | 被覆外径<br>INS. RANGE | DRAWN BY 6/20/88<br>Y.MIZUNO | CHK'D BY 96/03/26<br>Y.MIZUNO | DWG. NO.<br>SD-5267-NA | REV<br>B |
| MOLEX-JAPAN CO., LTD.<br>日本モレックス株式会社 | REVISE ONLY ON CAD SYSTEM | 2.5 LOW PROFILE<br>WAFFER ASS'Y |                    |                              |                               |                        |          |

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX/JAPAN AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION  
本図面は日本モレックス（株）の所有する情報を含むもので 当社の許可なく複製を禁止する。  
EN-01C(032)MXJ-32