

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[22-04-1131](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

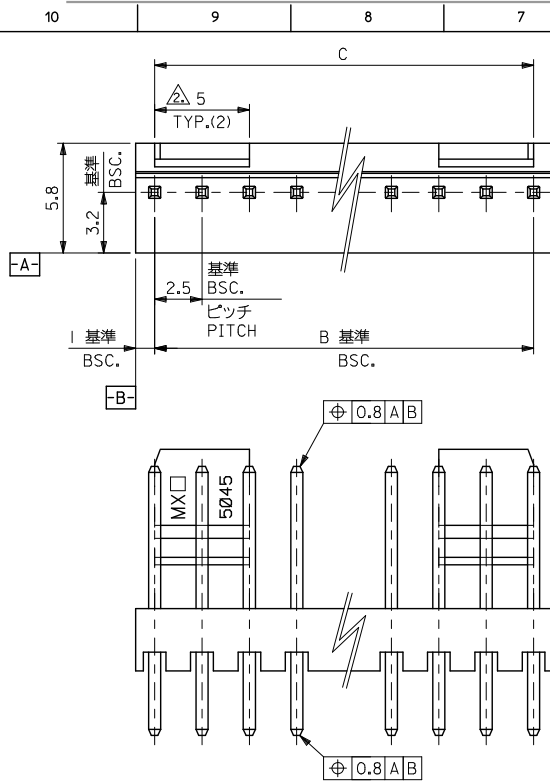

基板取付穴推奨寸法
RECOMMENDED P.C. BOARD HOLE DIM.

注)
NOTE.

1. 材料

MATERIAL

ピン: 0.635x14.2 黄銅、銅下地鍍メッキ

PIN: 0.635x14.2 BRASS TIN OVER COPPER PLATING.

ウエハー: ポリアミド, UL94V-0

WAFER: POLYAMIDE, UL94V-0

2. 6極以上に適用

TO BE APPLIED FOR 6 CKT. AND MORE THEN 6 CKT.

3. 5極以下はロック部スリットなし

NO SLIT IS PROVIDED FOR 5 CKT. AND LESS THEN 5 CKT.

4. ELV 及び RoHS 適合品

ELV AND RoHS COMPLIANT

1.35	0.85	47.5	47.5	22 04	1201	20
		45	45		1191	19
		42.5	42.5		1181	18
		40	40		1171	17
		37.5	37.5		1161	16
		35	35		1151	15
		32.5	32.5		1141	14
		30	30		1131	13
		27.5	27.5		1121	12
		25	25		1111	11
		22.5	22.5		1101	10
		20	20		1091	9
		17.5	17.5		1081	8
		15	15		1071	7
		12.5	12.5		1061	6
		10	10		1051	5
1.35	0.85	7.5	7.5		1041	4
1.2	1	5	5		1031	3
1.2	1	2.5	2.5	22 04	1021	2
D	E	C	B	ORDER No.	極数 CKT.	MODEL No. : 5045-**A

REVISED	EC NO. J2012-0973		2012/01/30	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
							MM ONLY		S:1	METRIC	◎ □	
							DRAWN BY DATE		TITLE			
					10 UNDER ± 0.4		K. KOHAMA 2000/03/28		KK 2.5 WAFER ASS'Y WITH LOCK			
					10 OVER 30 UNDER ± 0.45		CHECKED BY DATE					
					30 OVER ± 0.5		T. YAMAGUCHI 2000/03/30					
					ANGULAR ± 3 °		APPROVED BY DATE		molex			
					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
							SEE CHART		SD-5045-NA		1 OF 1	
							SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			