

## Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)  
[0022051022](#)


For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

10 9 8 7 6 5 4 3 2 1

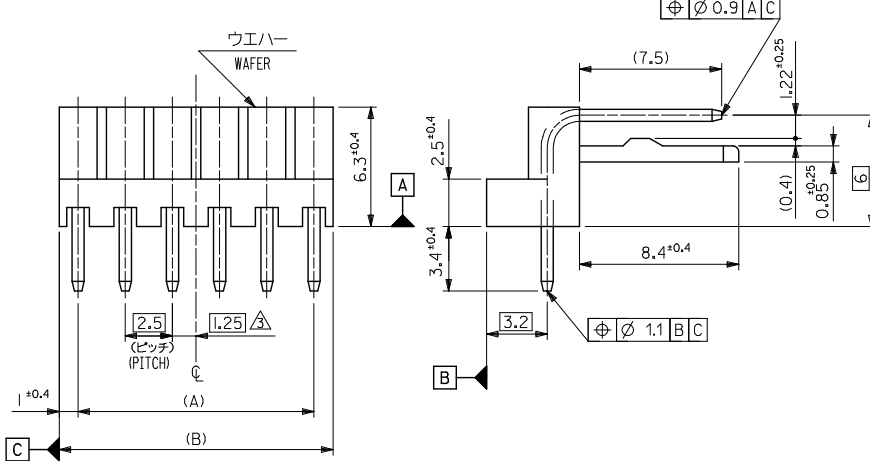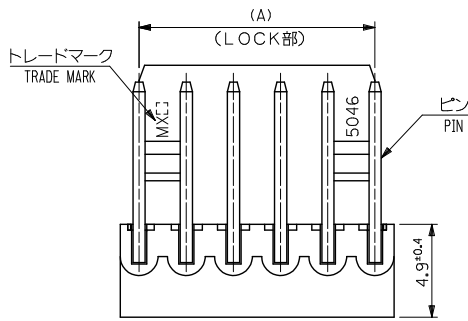

(公差非累積)  
(NON-ACCUMULATIVE)



基板取付穴推奨寸法 (±1.6)  
RECOMMENDED P.C. BOARD HOLE DIM.

注記  
NOTES :

- そり長は長さ2.5, 4に対して0.2MAX.  
CAMBER MUST BE WITHIN 0.2MAX.  
PER 25.4 .
- 材料 (MATERIAL)  
ウエハー: ポリアミド, UL94V-0  
WAFFER: POLYAMIDE, UL94V-0  
ピン: 0.635 黄銅, 銅下地鍍メッキ  
PIN: 0.635 BRASS, TIN OVER COPPER  
PLATING.
- 全極数が偶数の場合のみ適用。  
APPLY FOR EVEN CIRCUITS PRODUCT ONLY.
- ELV 及び RoHS 適合品  
ELV AND RoHS COMPLIANT.

|      |      |            |            |
|------|------|------------|------------|
| 49.5 | 47.5 | 22 05 1202 | 20         |
| 47   | 45   | 1192       | 19         |
| 44.5 | 42.5 | 1182       | 18         |
| 42   | 40   | 1172       | 17         |
| 39.5 | 37.5 | 1162       | 16         |
| 37   | 35   | 1152       | 15         |
| 34.5 | 32.5 | 1142       | 14         |
| 32   | 30   | 1132       | 13         |
| 29.5 | 27.5 | 1122       | 12         |
| 27   | 25   | 1112       | 11         |
| 24.5 | 22.5 | 1102       | 10         |
| 22   | 20   | 1092       | 9          |
| 19.5 | 17.5 | 1082       | 8          |
| 17   | 15   | 1072       | 7          |
| 14.5 | 12.5 | 1062       | 6          |
| 12   | 10   | 1052       | 5          |
| 9.5  | 7.5  | 1042       | 4          |
| 7    | 5    | 1032       | 3          |
| 4.5  | 2.5  | 22 05 1022 | 2          |
| (B)  | (A)  | ORDER No.  | 極数<br>CKT. |

MODEL No. : 5046-NA

THIRD ANGLE PROJECTION

KK2.5 R/A WAFER ASSY

**molex**

SD-5046-NA

SHEET NO.  
1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX  
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DWG. NO. SD-5046-NA

E





D

C

B

A

1MM DIMENSIONS IN METRIC DO NOT SCALE DRAWING

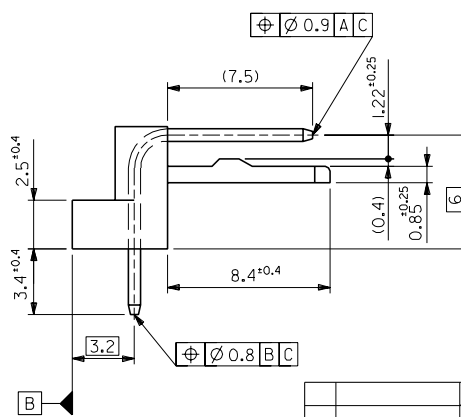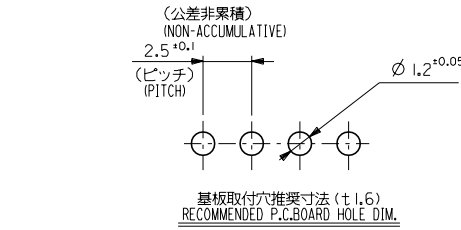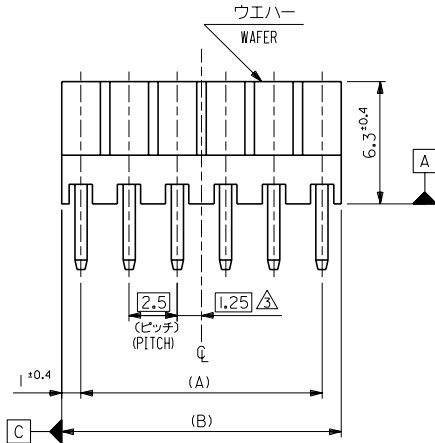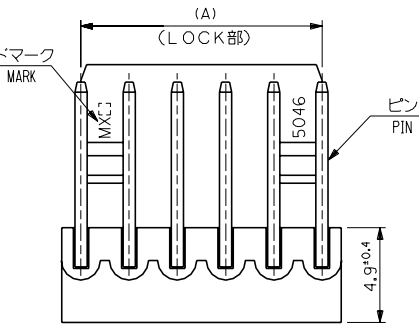

注記

NOTES :

1. そり長さは25.4に対して0.2MAX.  
CAMBER MUST BE WITHIN 0.2MAX.  
PER 25.4 .

2. 材料 (MATERIAL)

ウエハー: 66ナイロン, UL94V-0  
WAFFER: 66NYLON, UL94V-0

ピン: 0.635 黄銅, 銅下地鍍メッキ  
PIN: 0.635 BRASS, TIN OVER COPPER  
PLATING.

△ 全極数が偶数の場合のみ適用。  
APPLY FOR EVEN CIRCUITS PRODUCT ONLY.

|      |      |            |          |            |
|------|------|------------|----------|------------|
| 49.5 | 47.5 | 22-05-1202 | 5046-20A | 20         |
| 47   | 45   | -1192      | -19A     | 19         |
| 44.5 | 42.5 | -1182      | -18A     | 18         |
| 42   | 40   | -1172      | -17A     | 17         |
| 39.5 | 37.5 | -1162      | -16A     | 16         |
| 37   | 35   | -1152      | -15A     | 15         |
| 34.5 | 32.5 | -1142      | -14A     | 14         |
| 32   | 30   | -1132      | -13A     | 13         |
| 29.5 | 27.5 | -1122      | -12A     | 12         |
| 27   | 25   | -1112      | -11A     | 11         |
| 24.5 | 22.5 | -1102      | -10A     | 10         |
| 22   | 20   | -1092      | -09A     | 9          |
| 19.5 | 17.5 | -1082      | -08A     | 8          |
| 17   | 15   | -1072      | -07A     | 7          |
| 14.5 | 12.5 | -1062      | -06A     | 6          |
| 12   | 10   | -1052      | -05A     | 5          |
| 9.5  | 7.5  | -1042      | -04A     | 4          |
| 7    | 5    | -1032      | -03A     | 3          |
| 4.5  | 2.5  | 22-05-1022 | 5046-02A | 2          |
| (B)  | (A)  | EDP NO.    | ENG.NO.  | 極数<br>CKT. |

| 角度              | ANGLE | 公差    | 記号 | 変更内容 | 承認   | 日付      |
|-----------------|-------|-------|----|------|------|---------|
| 30以上            | OVER  | ±0.3  | H  | 変更   | Y.M. | 94/11/1 |
| 10以上 30未満       | UNDER | ±0.25 | H  | 変更   | Y.M. | 94/11/1 |
| 10未満            | UNDER | ±0.2  | G  | 変更   | Y.M. | 94/11/1 |
| 一般公差            |       |       |    |      |      |         |
| REVISION RECORD |       |       |    |      |      |         |
| 記号              | 変更内容  | 承認    | 日付 |      |      |         |
| LTR             |       |       |    |      |      |         |

材料

MATERIAL

注記参照

SEE NOTE

仕上げ

FINISH

適用電線範囲

WIRE RANGE

被覆外径

INS. RANGE

DRAWN BY

CHK'D BY

Y.M. HIRAMOTO

尺度

SCALE

5 : 1

MOLEX-JAPAN CO., LTD.  
日本モレックス株式会社

REVISE ONLY ON CAD SYSTEM

TITLE 名称

KK2.5 RIGHT ANGLE  
WAFFER ASS'Y

DWG. NO.

SD-5046-NA

REV

H

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX (JAPAN) AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

本図面は日本モレックス（株）の所有する情報を含むもので 当社の許可なく複製を禁止する。

EN-01C(032)MXJ-32

8

7

6

5

4

3

2

1

5046-020