

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[22-05-1062](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

10 9 8 7 6 5 4 3 2 1

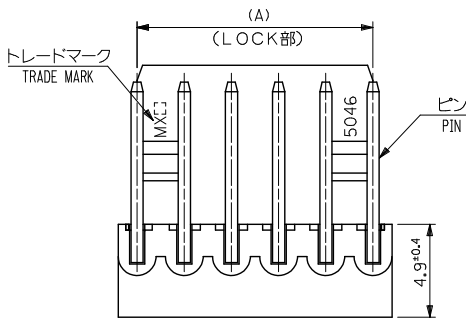


注記
NOTES :

- そり長は長さ2.5, 4に対して0.2MAX.
CAMBER MUST BE WITHIN 0.2MAX.
PER 25.4.
- 材料(MATERIAL)
ウエハー:ポリアミド, UL94V-0
WAFER:POLYAMIDE, UL94V-0
ピン:0.635 黄銅, 銅下地鍍メッキ
PIN:0.635 BRASS, TIN OVER COPPER
PLATING.
- 全極数が偶数の場合のみ適用。
APPLY FOR EVEN CIRCUITS PRODUCT ONLY.
- ELV 及び RoHS 適合品
ELV AND RoHS COMPLIANT.

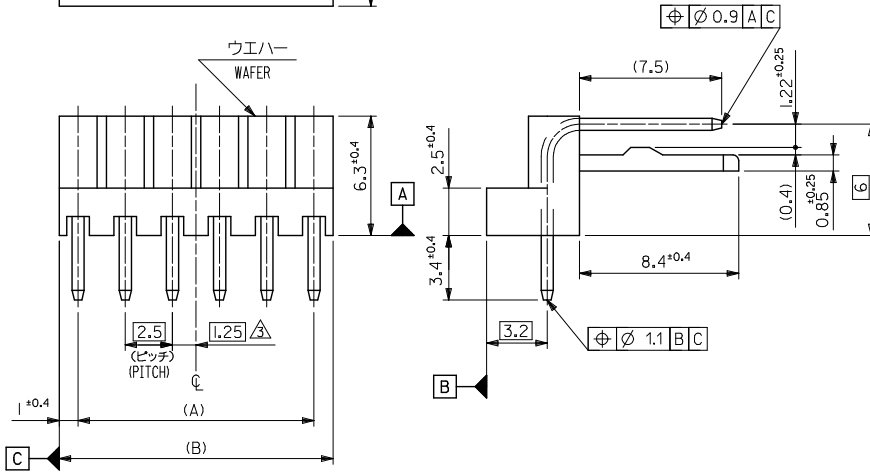

49.5	47.5	22 05 1202	20
47	45	1192	19
44.5	42.5	1182	18
42	40	1172	17
39.5	37.5	1162	16
37	35	1152	15
34.5	32.5	1142	14
32	30	1132	13
29.5	27.5	1122	12
27	25	1112	11
24.5	22.5	1102	10
22	20	1092	9
19.5	17.5	1082	8
17	15	1072	7
14.5	12.5	1062	6
12	10	1052	5
9.5	7.5	1042	4
7	5	1032	3
4.5	2.5	22 05 1022	2
(B)	(A)	ORDER No.	極数 CKT.

(公差非累積)
(NON-ACCUMULATIVE)



基板取付穴推奨寸法 (±1.6)
RECOMMENDED P.C. BOARD HOLE DIM.

REVISED	2017/01/30	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
	2017/01/30		10 UNDER	± 0.2	DRAWN BY Y. MIZUNO	DATE 1992/01/09	TITLE KK2.5 R/A WAFER ASSY		
	2017/01/30		10 OVER 30 UNDER	± 0.25	CHECKED BY H. HIRAMOTO	DATE 1994/11/11			
	2017/06/03		30 OVER	± 0.3	APPROVED BY	DATE			
			ANGULAR	± 3 °	MATERIAL NO.		DOCUMENT NO.		
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-5046-NA		
					SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
	2017/01/30	REV	DRWN:KASHIO						SHEET NO. 1 OF 1
	2017/01/30		CHKD:KASAKAWA						
	2017/06/03		APP:RNIUKITA						

9 8 7 6 5 4 3 2 1

DWG. NO. SD-5046-NA

E





D

C

B

A

1MM DIMENSIONS IN METRIC DO NOT SCALE DRAWING

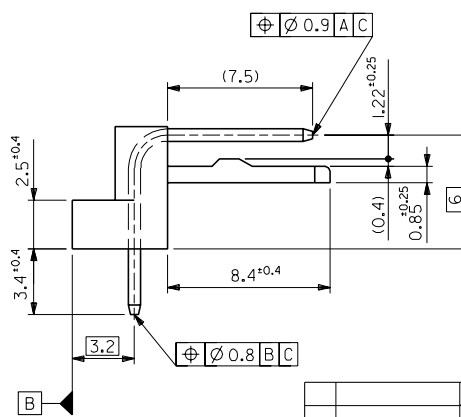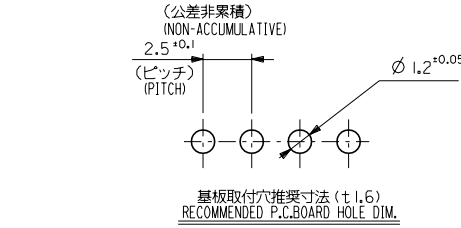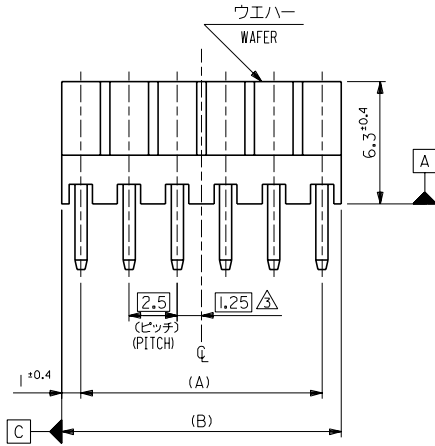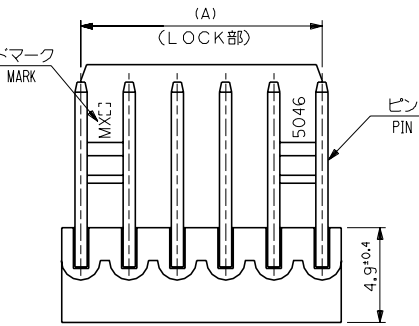

注記
NOTES :

1. そり長さは25. 4に対して0. 2MAX.
CAMBER MUST BE WITHIN 0.2MAX.
PER 25.4 .

2. 材料 (MATERIAL)

ウエハー : 66ナイロン, UL 94V-0
WAFER: 66NYLON, UL94V-0

ピン : 0.635 黄銅, 銅下地鍍メッキ
PIN: 0.635 BRASS, TIN OVER COPPER
PLATING.

△ 全極数が偶数の場合のみ適用。
APPLY FOR EVEN CIRCUITS PRODUCT ONLY.

49.5	47.5	22-05-1202	5046-20A	20
47	45	-1192	-19A	19
44.5	42.5	-1182	-18A	18
42	40	-1172	-17A	17
39.5	37.5	-1162	-16A	16
37	35	-1152	-15A	15
34.5	32.5	-1142	-14A	14
32	30	-1132	-13A	13
29.5	27.5	-1122	-12A	12
27	25	-1112	-11A	11
24.5	22.5	-1102	-10A	10
22	20	-1092	-09A	9
19.5	17.5	-1082	-08A	8
17	15	-1072	-07A	7
14.5	12.5	-1062	-06A	6
12	10	-1052	-05A	5
9.5	7.5	-1042	-04A	4
7	5	-1032	-03A	3
4.5	2.5	22-05-1022	5046-02A	2
(B)	(A)	EDP NO.	ENG.NO.	極数 CKT.

角度	ANGLE	公差	記号	変更内容	承認	日付
30以上	OVER	+0.3	H	変更	Y.M.	94/11/1
10以上 30未満	UNDER	+0.25	H	変更	Y.M.	94/11/1
10未満	UNDER	+0.2	G	変更	Y.M.	94/11/1
一般公差	GENERAL TOLERANCES					

材料	MATERIAL	注記参照	SEE NOTE
仕上げ	FINISH		
適用電線範囲	WIRE RANGE		
被覆外径	INS. RANGE		
DRAWN BY	92/1/3	CHK'D BY	94/11/1
YAMIZUNO		Y.M. H.HIRAMOTO	
APP'D BY	94/11/1	尺度	5 : 1
M.FUKUSHIMA			

MOLEX-JAPAN CO., LTD.	日本モレックス株式会社
REVISE ONLY ON CAD SYSTEM	
TITLE 名称	KK2.5 RIGHT ANGLE WAFER ASS'Y
DWG. NO.	SD-5046-NA
REV	H

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX (JAPAN) AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
本図面は日本モレックス (株) の所有する情報を含むもので 当社の許可なく複製を禁止する。
EN-01C(032)MXJ-32

8 7 6 5 4 3 2 1