

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[Molex Connector Corporation](#)
[22-11-1021](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

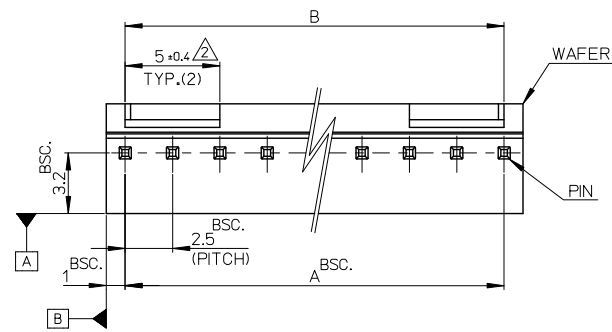

基板取付穴推奨寸法
RECOMMENDED P.C.BOARD HOLE DIM.

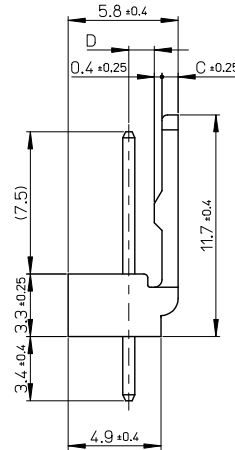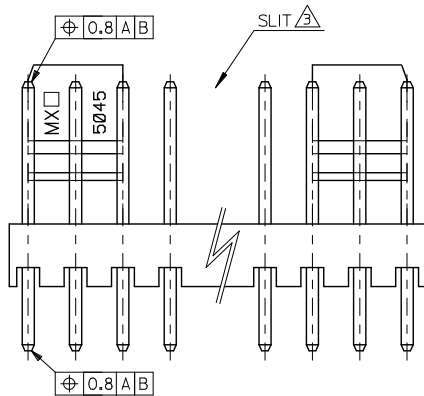

注)
NOTE.

1. 材料

MATERIAL

ピン: 0.635x14.2 黄銅、ニッケル下地金メッキ

PIN: 0.635x14.2 BRASS Au OVER NICKEL PLATING.

ウェハー: ポリアミド, UL 94 V-0

WAHER: POLYAMIDE, UL94V-0

△ 6極以上に適用

TO BE APPLIED FOR 6 CKT. AND MORE THEN 6 CKT.

△ 5極以下はロック部スリットなし

NO SLIT IS PROVIDED FOR 5 CKT. AND LESS THAN 5 CKT.

4. ELV 及び RoHS 適合品

ELV AND RoHS COMPLIANT

1.35	0.85	47.5	45	42.5	40	37.5	35	32.5	30	27.5	25	22.5	20	17.5	15	12.5	10	7.5	5	2.5	1	0.5
↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑
1191	1181	1171	1161	1151	1141	1131	1121	1111	1101	1091	1081	1071	1061	1051	1041	1031	1021	1011	1001	991	981	971
20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	-1	-2
1.35	0.85	47.5	45	42.5	40	37.5	35	32.5	30	27.5	25	22.5	20	17.5	15	12.5	10	7.5	5	2.5	1	0.5
↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
1191	1181	1171	1161	1151	1141	1131	1121	1111	1101	1091	1081	1071	1061	1051	1041	1031	1021	1011	1001	991	981	971
20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	-1	-2

REDRAWN & REVISED EC NO: J2014-0920 TIDRNRHORI 2013/11/25 CHKDASKAWA 2013/11/28 APPR.NIKITA 2013/11/28	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	DRAWN BY Y. MIZUNO	DATE 1990/03/23	TITLE KK2.5 WAFER ASSY WITH LOCK ENGLISH ONLY				
		10 OVER 30 UNDER	± 0.25	CHECKED BY	DATE					
		30 OVER	± 0.3	APPROVED BY M. ENOMOTO	DATE 1991/12/10					
REV	SIZE A3	ANGULAR ± 3 °		MATERIAL NO.		DOCUMENT NO.				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-5045-001				
						SHEET NO. 1 OF 1				