

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[52465-1091](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

DWG. NO.
SD-52465-**-27

E


D

C

B

A


DIMENSIONS IN METRIC DO NOT SCALE DRAWING

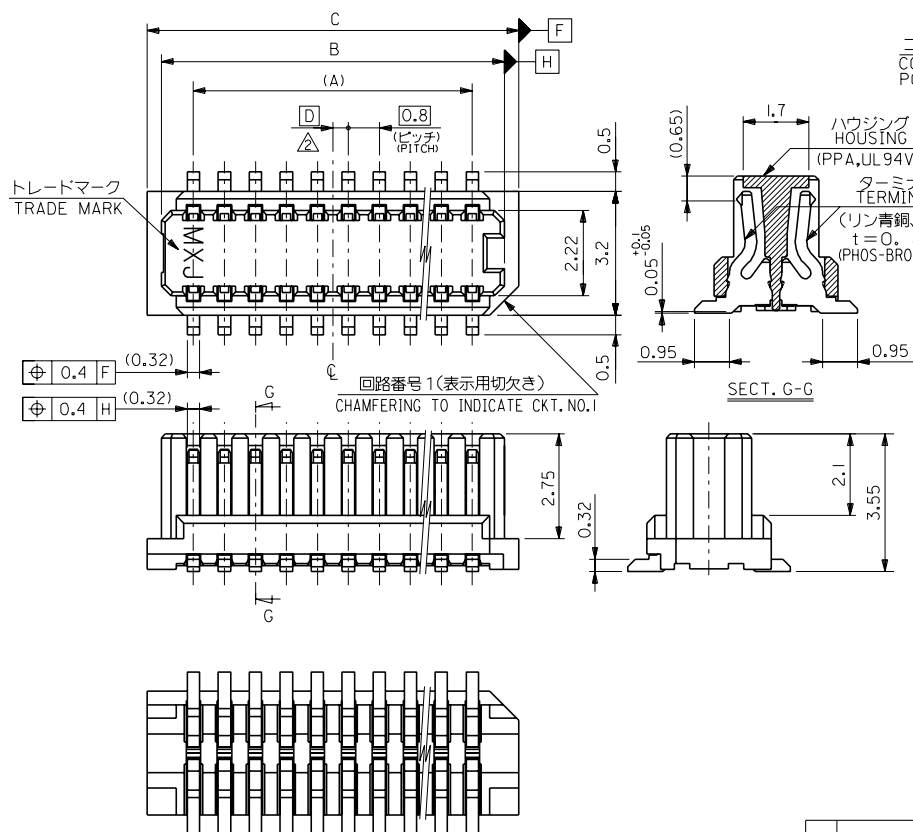

注記 NOTES

- 嵌合相手: 53307-**-17, 53307-**-27, 53309-**-17, 53309-**-27
MATES WITH
- ハウジングの ϕ から隣接するターミナルの ϕ 迄の位置を示す。
SHOW POSITION FROM ϕ OF HOUSING TO ϕ OF ADJACENT TERMINALS.
- 一対の基板の嵌合に於いて、本製品を2個以上使用することは推奨できません。
MXJ DOES NOT RECOMMEND THE USAGE OF TWO OR MORE OF THESE CONNECTORS BETWEEN A SINGLE PAIR OF P.C. BOARD.

角度 ANGLE	寸法 DIM.	変更内容 REVISION RECORD	日付 DATE	検査者 CHECKER
30°以上 OVER	+0.3	B 変更 REVISD (JC60753)	9/4/18	Y.M.
10°以上 30°未満 UNDER	+0.25	A 変更 REVISD (J21207)	9/1/17	T.I.
10°未満 UNDER	+0.2	O 新規作成 PROPOSED (J11001)	9/1/15	N.T.
一般公差 GENERAL TOLERANCES		記号 LTR	日付 DATE	検査者 CHECKER

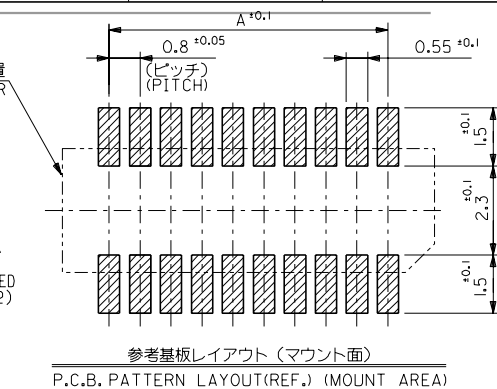

0.4	17.6	16.85	15.2	52465-4027	40
0.8	16.8	16.05	14.4	-3827	38
0.4	16.0	15.25	13.6	-3627	36
0.8	15.2	14.45	12.8	-3427	34
0.4	14.4	13.65	12.0	-3227	32
0.8	13.6	12.85	11.2	-3027	30
0.4	12.8	12.05	10.4	-2827	28
0.8	12.0	11.25	9.6	-2627	26
0.4	11.2	10.45	8.8	-2427	24
0.8	10.4	9.65	8.0	-2227	22
0.4	9.6	8.85	7.2	-2027	20
0.8	8.8	8.05	6.4	-1827	18
0.4	8.0	7.25	5.6	-1627	16
0.8	7.2	6.45	4.8	-1427	14
0.4	6.4	5.65	4.0	-1227	12
0.8	5.6	4.85	3.2	52465-1027	10
D	C	B	A	ENG. NO.	極数 CKT.



材料 図中参照
SEE DRAWING仕上げ
FINISH適用電線範囲
WIRE RANGE被覆外径
INS. RANGEDRAWN BY 9/1/14 CHK'D BY 9/4/18
K. ASAKAWA Y.M. M. FUKUSHIMAAPPRO'D BY 9/4/18 尺度
M. FUKUSHIMA SCALEmolex MOLEX-JAPAN CO., LTD.
日本モレックス株式会社

REVISE ONLY ON CAD SYSTEM



TITLE 名称
0.8 BOARD TO BOARD
CONN. HOUSING ASS'Y SMT
(WITHOUT BOSS)DWG. NO.
SD-52465-**-27REV
BTHIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX (JAPAN) AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
本図面は日本モレックス（株）の所有する情報を含むもので 当社の許可なく複製を禁止する。

EN-01C(032)MXJ-32

10 9 8 7 6 5 4 3 2 1

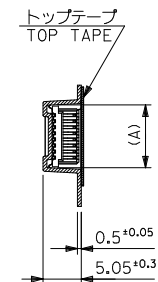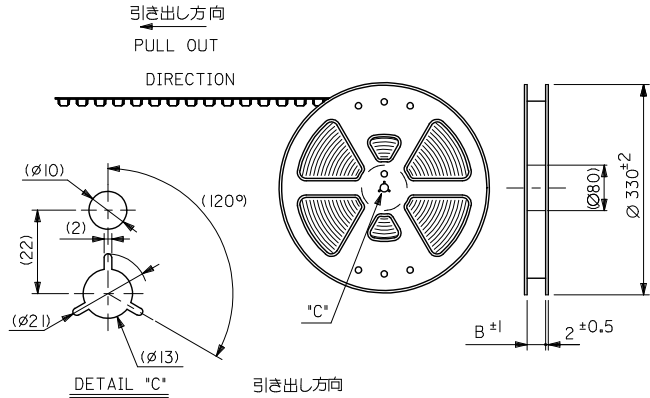

SECT. Z-Z

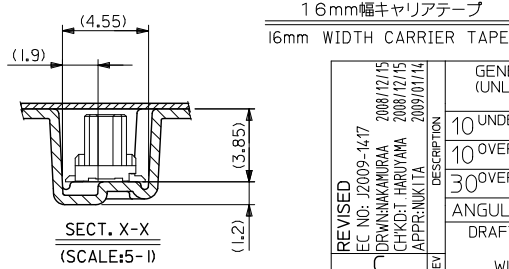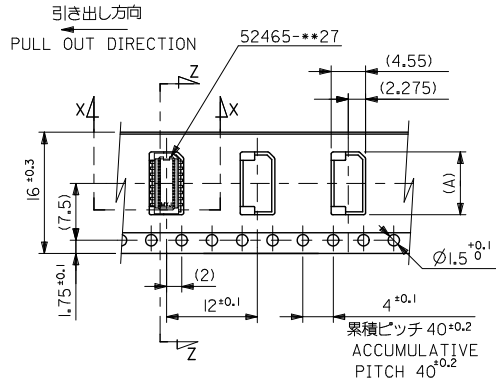


注記 NOTES

1. 梱包数量: 1000個/リール NUMBER OF CONNECTORS: 1000PCS/REEL

2. リードテープ長さ LEAD TAPE LENGTH

トップテープ TOP TAPE
リーダー部 LEADER PART
未接着部 NON-BONDED PART

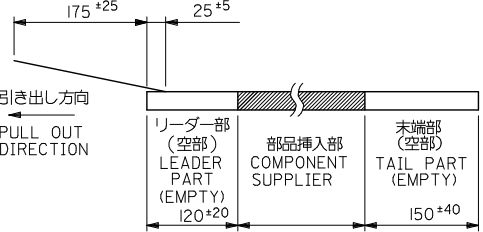

3. トップテープの剥離強度: (剥離方向は下図参照)


0.1N~0.7N (10.2gf~71.4gf) 尚、本規格値は、出荷時に適用。
(但し、輸送時に剥離が発生しない事。)

PEELING OFF FORCE OF TOP TAPE

0.1N~0.7N (10.2gf~71.4gf) (PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)

THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT

PEEL OFF SHOULD NOT BE ALLOWED,
DURING TRANSPORTATION



4. 材料

キャリアテープ: ポリプロピレン (PP)

トップテープ: PET, PE, PEF

リール: ポリスチレン (PS)

<リサイクル材を含む>

MATERIAL

CARRIER TAPE: POLYPROPYLENE

TOP TAPE: PET, PE, PEF

REEL: POLYSTYRENE (PS)

<RECYCLE MATERIAL CONTAINED>

16	17.5	6.7	52465-1291	12
キャリアテープ幅	B	5.9	52465-1091	10
CARRIER TAPE WIDTH	(A)	MATERIAL NO.	極数	CIRCUIT

REVISED	EC NO. J2009-147 DRAWN: KAMURA CHECK: HIRUYAMA APPROVE: KITA 2008/12/15 2008/12/15 2009/01/14	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
			10 UNDER	± ---	DRAWN BY K. ASAKAWA	DATE '91/11/22	TITLE 0.8 B-T0-B HSG ASSY SMT EMBSTP PKG			
			10 OVER 30 UNDER	± ---	CHECKED BY T. ITO	DATE '00/12/20				
			30 OVER	± ---	APPROVED BY M. FUKUSHIMA	DATE '00/12/20	MOLEX INCORPORATED			
			ANGULAR	± --- °	MATERIAL NO.					
REV	C	REVISION	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-52465-041		1 OF 2	
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

