

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Sumida Corporation](#)  
[CDRH50D18RLDNP-100MC](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# SMD Power Inductor CDRH50D18R/LD



### Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 5.2 × 5.2 × 2.0mm Max.
- Product weight: 0.16g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

### Environmental Data

- Operating temperature range: -40°C~+125°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+125°C
- Solder reflow temperature: 260 °C peak.


### Packaging

- Carrier tape and reel packaging.
- 13.0" diameter reel
- 3000pcs per reel


### Applications

- Ideally used in digital single-lens reflex camera etc.


### Dimension - [mm]

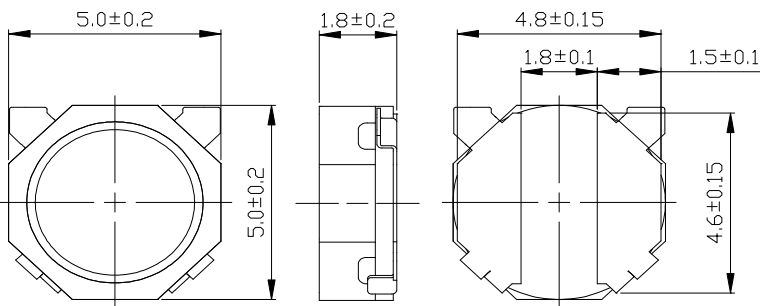

### Land pattern and Schematics - [mm]

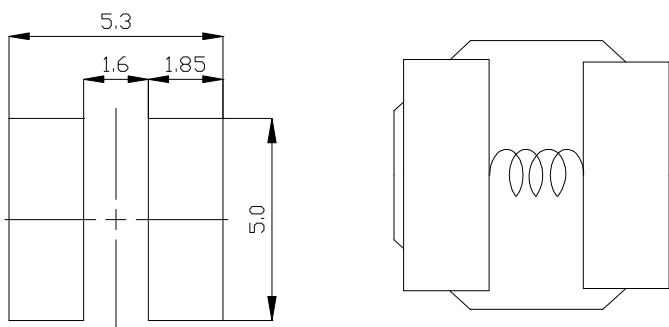

# SMD Power Inductor CDRH50D18R/LD



## Electrical Characteristics


Part No.	Stamp	Inductance ( $\mu$ H) [Within] ※1	D.C.R. (m $\Omega$ ) [Within] (at 20°C)	Saturation current (A) ※2		Temperature rise current (A) ※3
				(at 20°C)	(at 105°C)	
CDRH50D18RLDNP-1R1NC	A	1.1 $\pm$ 30%	17 $\pm$ 25%	2.10	1.72	4.40
CDRH50D18RLDNP-1R6NC	B	1.6 $\pm$ 30%	20 $\pm$ 25%	1.75	1.46	3.95
CDRH50D18RLDNP-2R2NC	C	2.2 $\pm$ 30%	24 $\pm$ 25%	1.50	1.24	3.45
CDRH50D18RLDNP-3R6NC	D	3.6 $\pm$ 30%	31 $\pm$ 25%	1.17	0.98	3.15
CDRH50D18RLDNP-4R7MC	E	4.7 $\pm$ 20%	34 $\pm$ 25%	1.00	0.83	2.98
CDRH50D18RLDNP-6R8MC	F	6.8 $\pm$ 20%	52 $\pm$ 25%	0.85	0.70	2.22
CDRH50D18RLDNP-100MC	G	10 $\pm$ 20%	79 $\pm$ 25%	0.72	0.58	1.80
CDRH50D18RLDNP-150MC	H	15 $\pm$ 20%	120 $\pm$ 20%	0.58	0.47	1.40
CDRH50D18RLDNP-220MC	J	22 $\pm$ 20%	178 $\pm$ 20%	0.48	0.40	1.17
CDRH50D18RLDNP-330MC	K	33 $\pm$ 20%	255 $\pm$ 20%	0.38	0.30	0.97
CDRH50D18RLDNP-470MC	L	47 $\pm$ 20%	355 $\pm$ 20%	0.32	0.26	0.77
CDRH50D18RLDNP-680MC	M	68 $\pm$ 20%	600 $\pm$ 20%	0.28	0.23	0.54
CDRH50D18RLDNP-101MC	N	100 $\pm$ 20%	760 $\pm$ 20%	0.22	0.20	0.50
CDRH50D18RLDNP-151MC	P	150 $\pm$ 20%	1420 $\pm$ 20%	0.18	0.15	0.34

※1. Measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 70% of it's nominal value.













※3. Temperature rise current: The value of D.C. current when the temperature rise is  $\Delta t=40^{\circ}\text{C}$  ( $T_a=20^{\circ}\text{C}$ ).

# SMD Power Inductor CDRH50D18R/LD

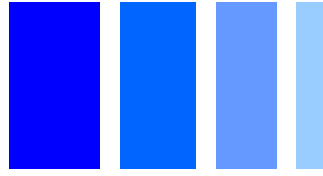


## Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) —  $\Delta T$

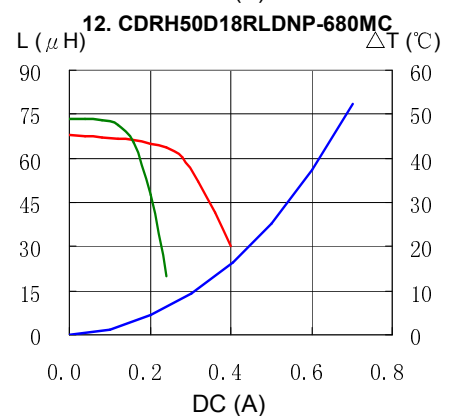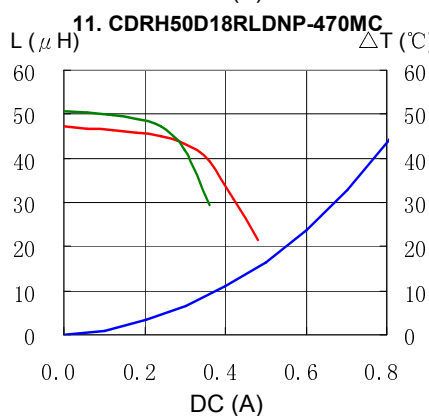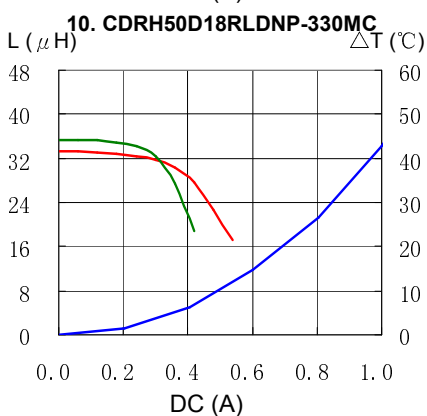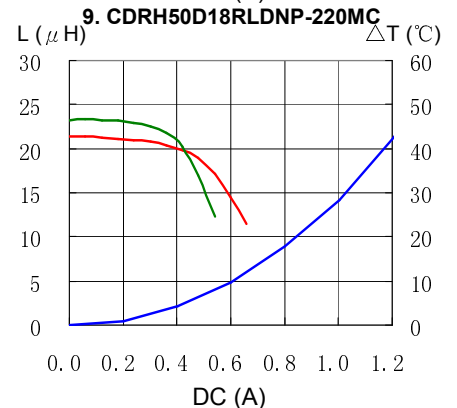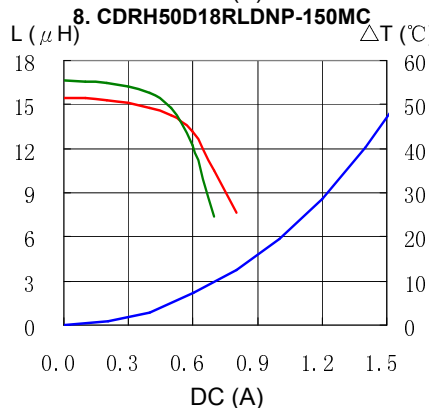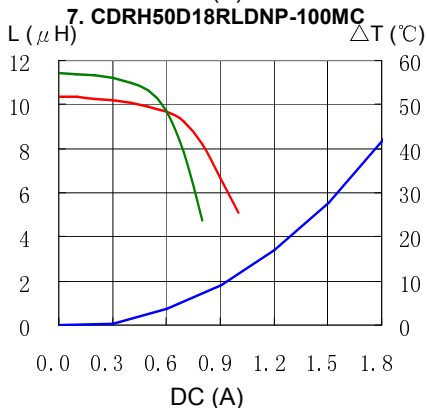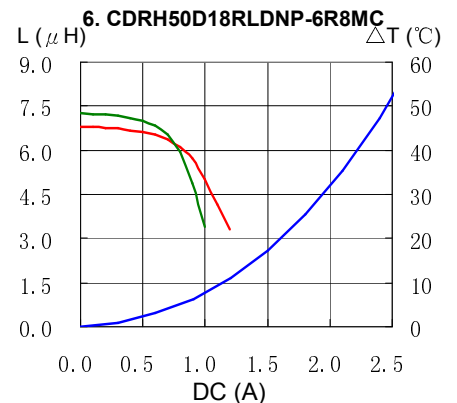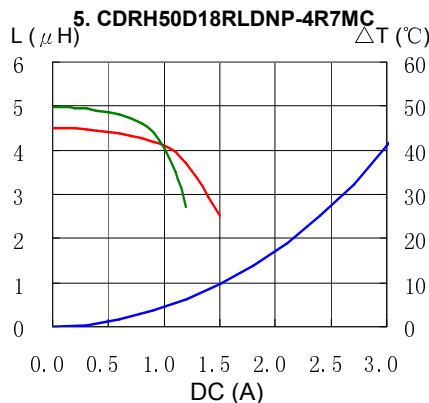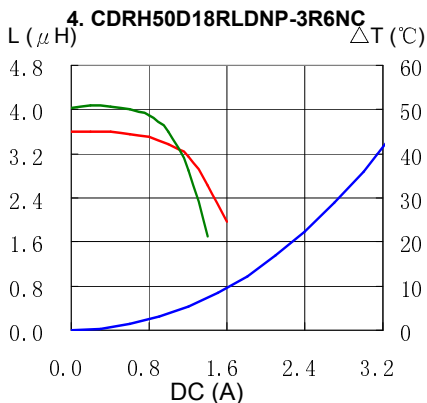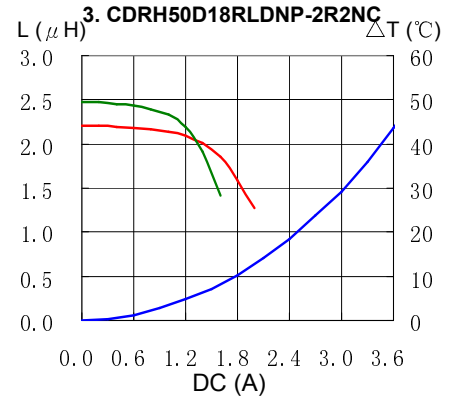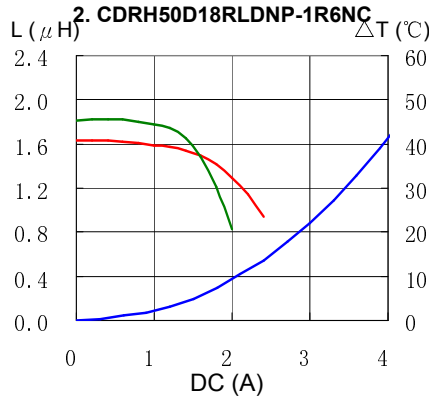
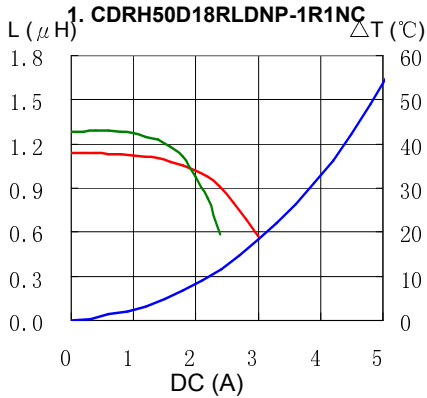


# SMD Power Inductor CDRH50D18R/LD





## Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

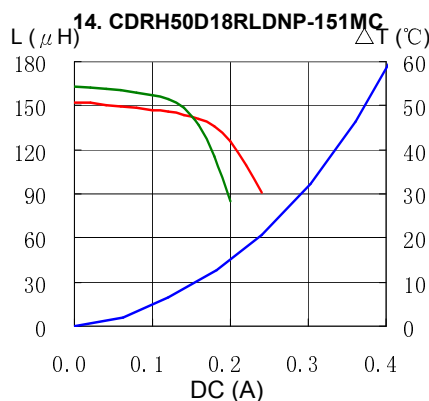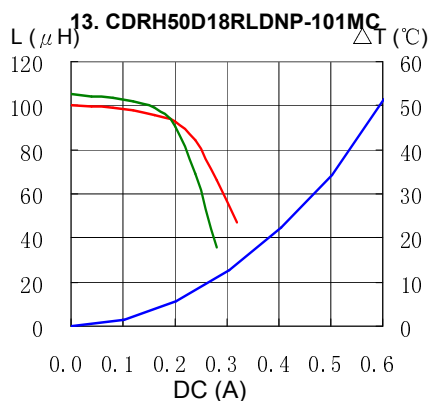

## Solder Reflow Condition

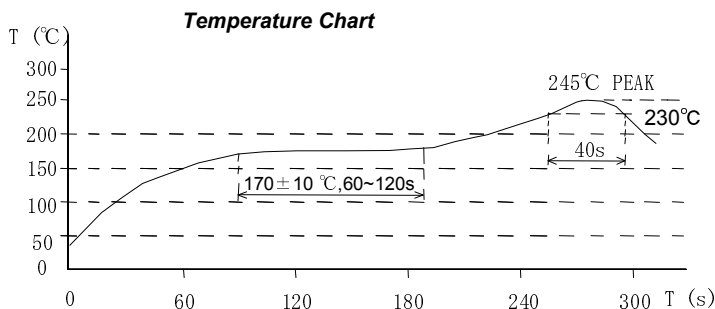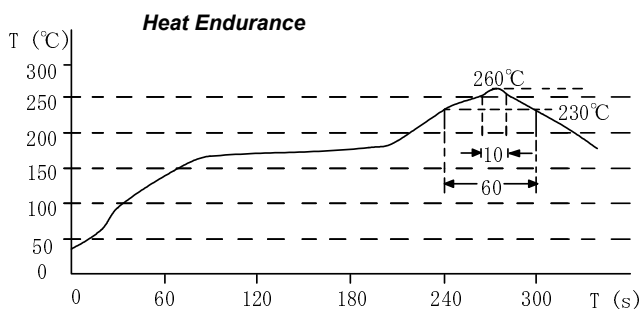

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel. +852-2880-6781  
 FAX. +852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Saitama(Japan)

Tel. +81-48-691-7300  
 FAX. +81-48-691-7340  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel. +1-847-545-6700  
 FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel. +86-21-5836-3299  
 FAX. +86-21-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel. +82-2-6237-0777  
 FAX. +82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Obernzell

Tel. +49-8591-937-0  
 FAX. +49-8591-937-103  
[contact@eu.sumida.com](mailto:contact@eu.sumida.com)

### Shenzhen

Tel. +86-755-8291-0228  
 FAX. +86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel. +65-6296-3388  
 FAX. +65-6841-4426  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel. +49-9181-4509-110  
 FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel. +886-2-8751-2737  
 FAX. +886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel. +1-408-321-9660  
 FAX. +1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)