

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Sumida Corporation](#)
[CDRH50D43RNP-2R2NC](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SMD Power Inductor CDRH50D43R



Halogen Free



Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 5.3 × 5.3 × 4.5mm Max.
- Product weight: 0.38g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

Environmental Data

- Operating temperature range: -40°C~+105°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+105°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging.
- 13.0" diameter reel
- 1500pcs per reel


Applications

- Ideally used in Slim-type TV , car navigation etc.

Dimension - [mm]

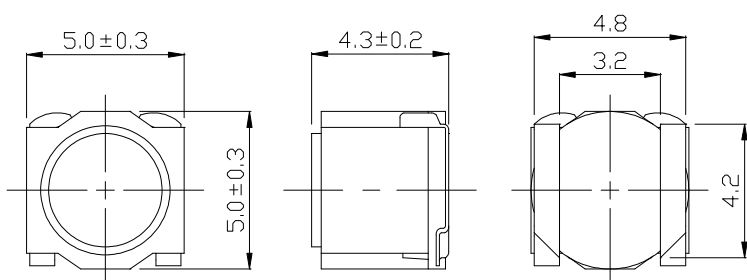

Land pattern and Schematics - [mm]

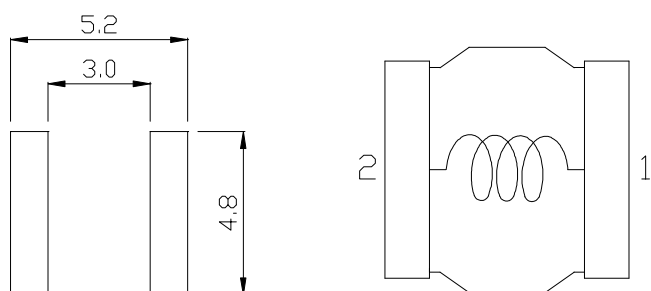

SMD Power Inductor CDRH50D43R



Electrical Characteristics


Part No.	Stamp	Inductance (μ H) [Within] ※1	D.C.R.(m Ω) [Within] (at 20°C)	Saturation current (A) ※2		Temperature rise current (A) ※3
				(at 20°C)	(at 105°C)	
CDRH50D43RNP-2R2NC	C	2.2 \pm 30%	22 \pm 25%	3.60	3.00	3.80
CDRH50D43RNP-3R3NC	D	3.3 \pm 30%	25 \pm 25%	2.90	2.50	3.50
CDRH50D43RNP-4R7MC	E	4.7 \pm 20%	30 \pm 25%	2.44	2.08	3.20
CDRH50D43RNP-6R8MC	F	6.8 \pm 20%	37 \pm 25%	2.12	1.70	2.80
CDRH50D43RNP-100MC	G	10 \pm 20%	47 \pm 25%	1.75	1.48	2.40
CDRH50D43RNP-150MC	H	15 \pm 20%	72 \pm 25%	1.44	1.28	1.90
CDRH50D43RNP-220MC	J	22 \pm 20%	112 \pm 20%	1.16	0.97	1.44
CDRH50D43RNP-330MC	K	33 \pm 20%	160 \pm 20%	0.96	0.80	1.25
CDRH50D43RNP-470MC	M	47 \pm 20%	270 \pm 20%	0.78	0.67	0.91
CDRH50D43RNP-680MC	N	68 \pm 20%	430 \pm 20%	0.65	0.53	0.72
CDRH50D43RNP-101MC	P	100 \pm 20%	545 \pm 20%	0.54	0.45	0.65
CDRH50D43RNP-151MC	Q	150 \pm 20%	775 \pm 20%	0.44	0.37	0.51
CDRH50D43RNP-221MC	R	220 \pm 20%	975 \pm 20%	0.36	0.30	0.49

※1. Measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 70% of it's nominal value.


※3. Temperature rise current: The value of D.C. current when the temperature rise is $\Delta t=40^{\circ}\text{C}$ ($T_a=20^{\circ}\text{C}$).

SMD Power Inductor CDRH50D43R




Saturation Current & Temperature Rise Graph


— L (20°C) — L (105°C) — ΔT

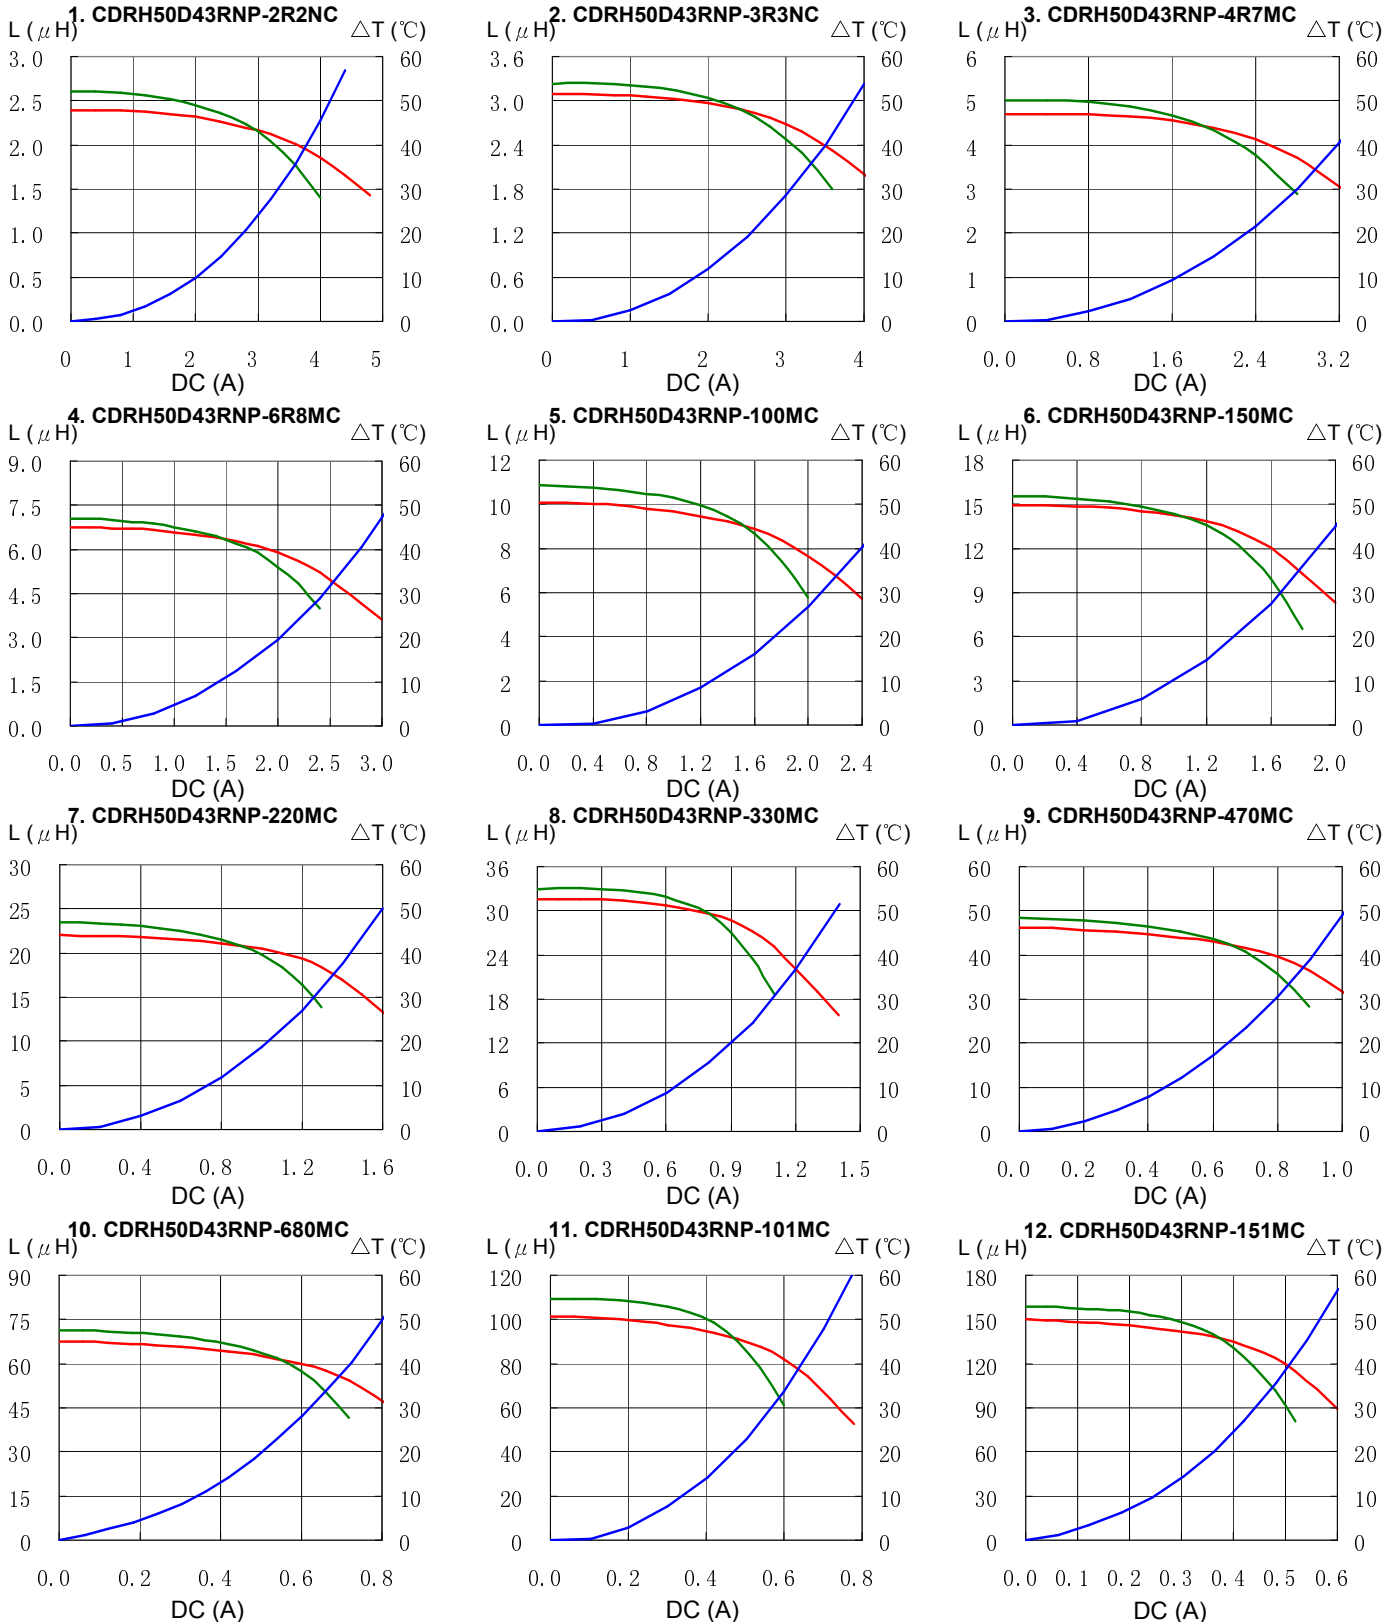



SMD Power Inductor CDRH50D43R



Saturation Current & Temperature Rise Graph

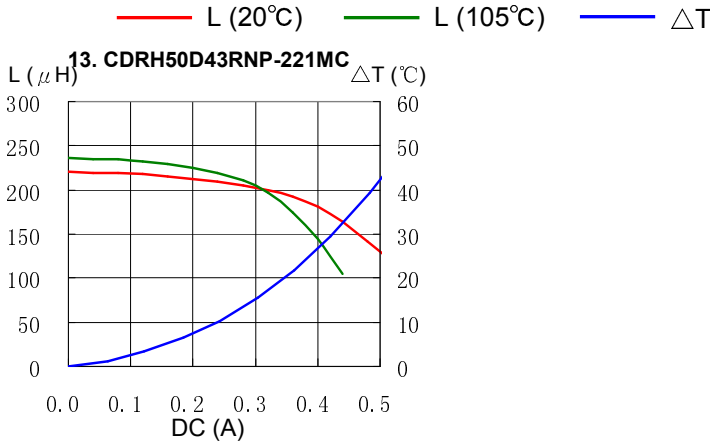

Solder Reflow Condition

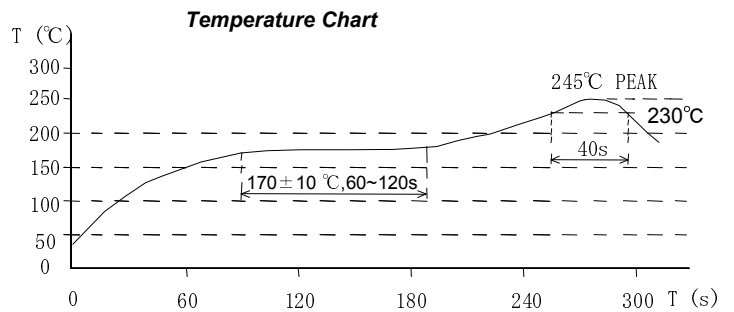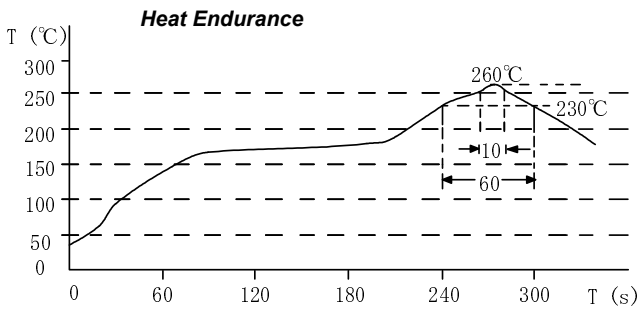

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel. +852-2880-6781
 FAX. +852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel. +81-48-691-7300
 FAX. +81-48-691-7340
sales@jp.sumida.com

Chicago

Tel. +1-847-545-6700
 FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel. +86-21-5836-3299
 FAX. +86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel. +82-2-6237-0777
 FAX. +82-2-6237-0778
sales@kr.sumida.com

Oberzell

Tel. +49-8591-937-0
 FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel. +86-755-8291-0228
 FAX. +86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel. +65-6296-3388
 FAX. +65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel. +49-9181-4509-110
 FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel. +886-2-8751-2737
 FAX. +886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel. +1-408-321-9660
 FAX. +1-408-321-9308
sales@us.sumida.com