

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Sumida Corporation](#)

[CDRH7D16NP-100MC](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SMD Power Inductor CDRH7D16



Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 8.0 × 7.7 × 1.8 mm Max.
- Product weight: 0.4g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Environmental Data

- Operating temperature range: -40°C~+100°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+100°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging
- 12.9" diameter reel
- 2000pcs per reel


Applications

- Ideally used in Notebook PC, Game machine, HDD, DVC, LCD TV etc. as DC-DC converter inductors.

Dimension - [mm]

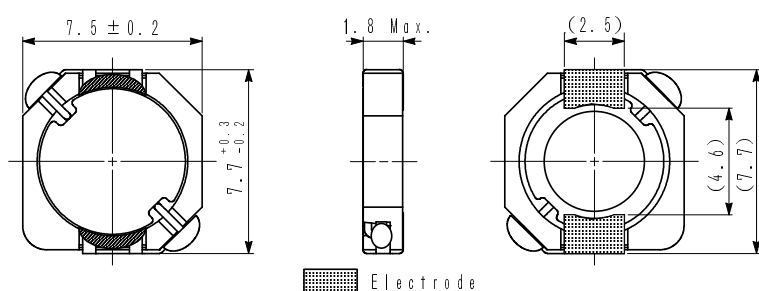

Land pattern and Schematics - [mm]

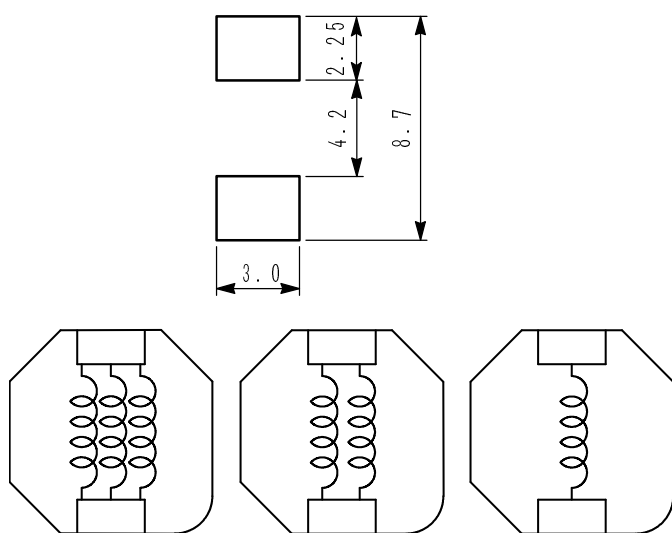

(1.2 μ H ~ 15 μ H) (22 μ H ~ 33 μ H) (47 μ H ~ 100 μ H)

SMD Power Inductor CDRH7D16



Electrical Characteristics

Part No.	Stamp	Inductance (μ H) [within] ※ 1	D.C.R. (m Ω) [within] (at 20°C)	Saturation Current (A) ※ 2		Temperature Rise Current (A) ※ 3
				at 20°C	at 100°C	
CDRH7D16NP-1R2PC	1R2	1.2 $\pm$ 25%	16.8 $\pm$ 25%	4.60	4.00	4.94
CDRH7D16NP-1R8PC	1R8	1.8 $\pm$ 25%	20.4 $\pm$ 25%	3.60	3.00	4.21
CDRH7D16NP-2R4PC	2R4	2.4 $\pm$ 25%	24.8 $\pm$ 25%	3.10	2.50	3.77
CDRH7D16NP-3R3PC	3R3	3.3 $\pm$ 25%	30.9 $\pm$ 25%	2.70	2.30	3.23
CDRH7D16NP-4R7PC	4R7	4.7 $\pm$ 25%	45.4 $\pm$ 25%	2.40	1.90	2.65
CDRH7D16NP-6R8PC	6R8	6.8 $\pm$ 25%	61.0 $\pm$ 25%	2.00	1.60	2.24
CDRH7D16NP-100MC	100	10 $\pm$ 20%	78.6 $\pm$ 25%	1.60	1.30	1.97
CDRH7D16NP-150MC	150	15 $\pm$ 20%	115 $\pm$ 20%	1.30	1.10	1.59
CDRH7D16NP-220MC	220	22 $\pm$ 20%	161 $\pm$ 20%	1.10	0.90	1.23
CDRH7D16NP-330MC	330	33 $\pm$ 20%	246 $\pm$ 20%	0.92	0.75	1.04
CDRH7D16NP-470MC	470	47 $\pm$ 20%	369 $\pm$ 20%	0.76	0.60	0.81
CDRH7D16NP-680MC	680	68 $\pm$ 20%	517 $\pm$ 20%	0.64	0.50	0.71
CDRH7D16NP-101MC	101	100 $\pm$ 20%	696 $\pm$ 20%	0.53	0.40	0.59

※1. Inductance measuring conditions at 100kHz.

※2. Saturation current: The DC current at which the inductance decreases to 65% of its nominal value.


※3. Temperature rise current: The DC current at which the temperature rise is $\Delta t=40^{\circ}\text{C}$. ($T_a=20^{\circ}\text{C}$)

SMD Power Inductor CDRH7D16



Saturation Current & Temperature Rise Graph


— L (20°C) — L (105°C) — ΔT

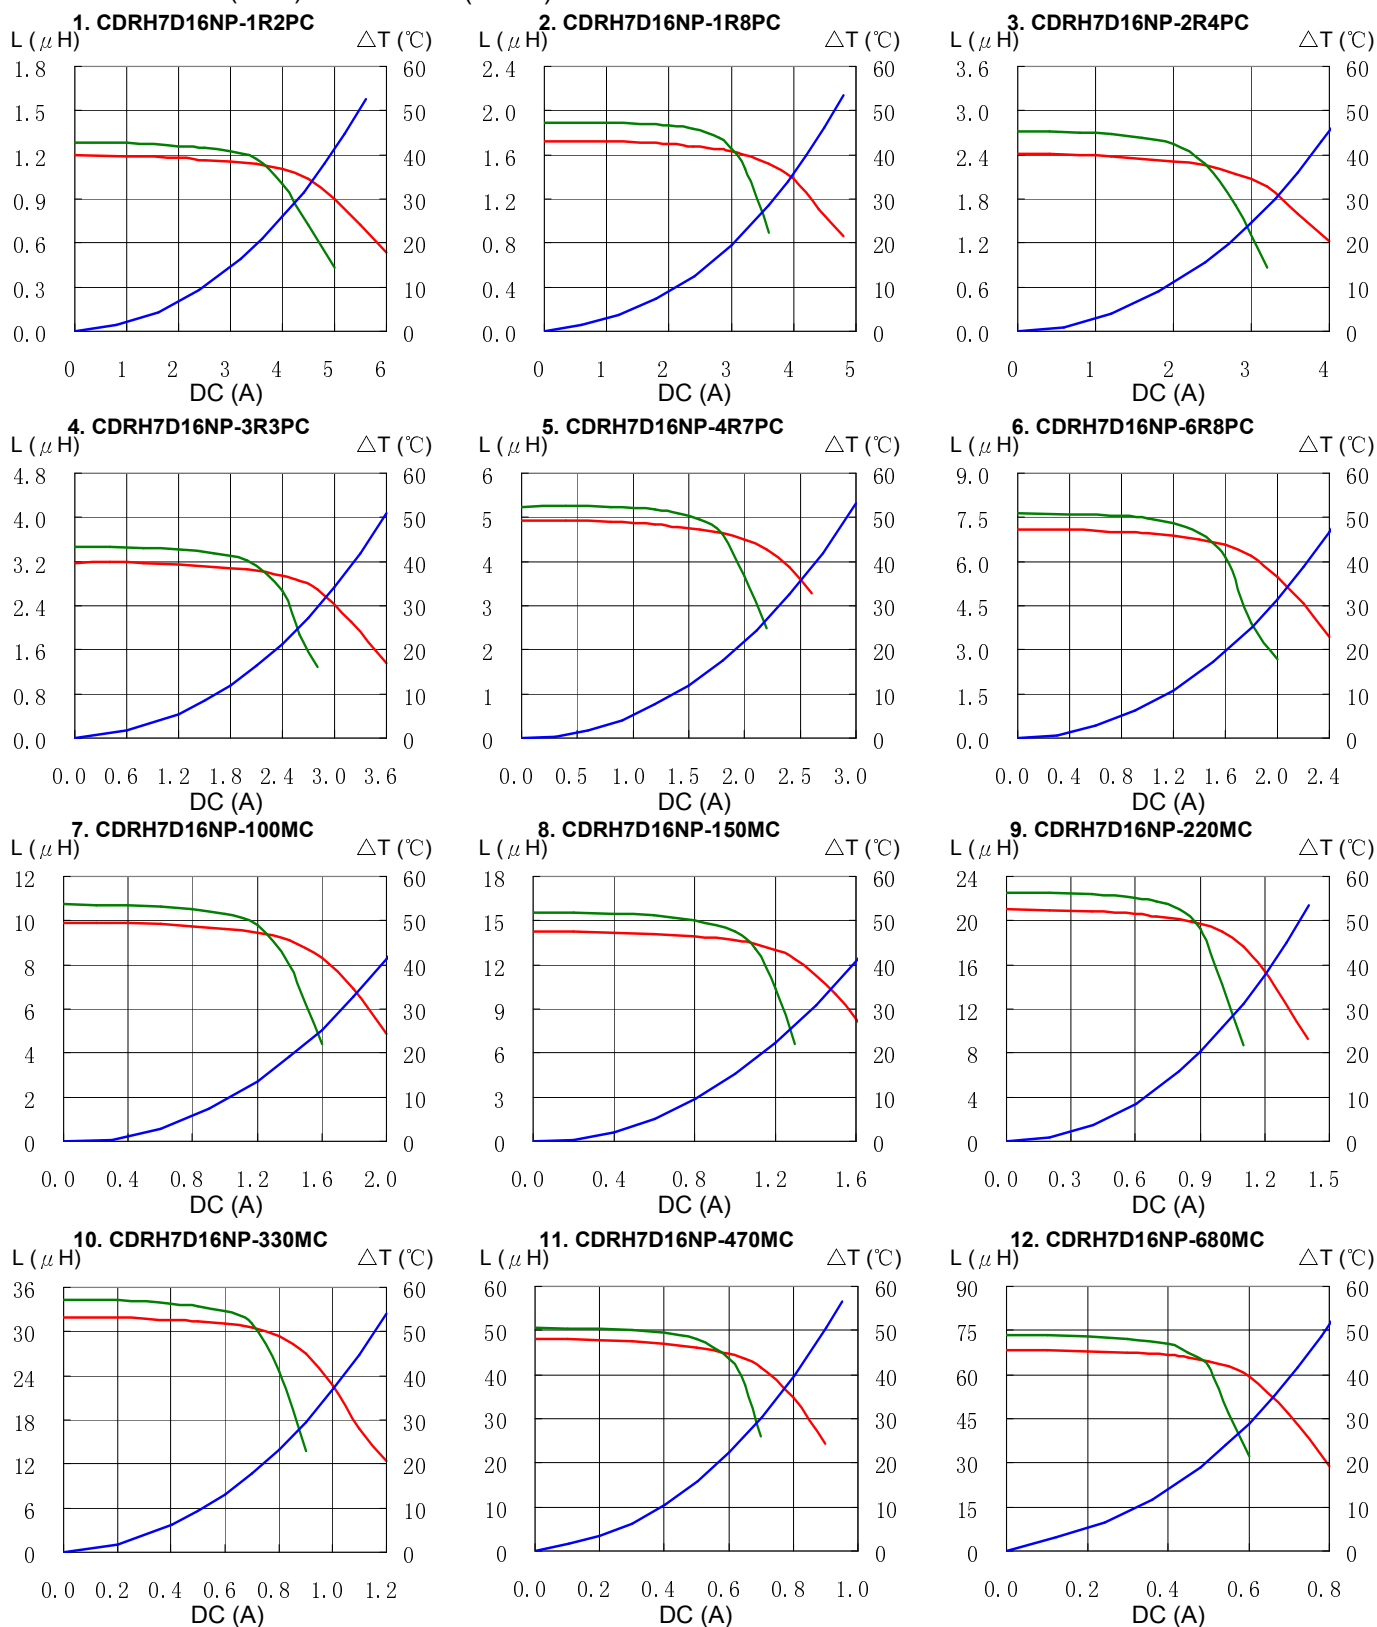



SMD Power Inductor CDRH7D16



Saturation Current & Temperature Rise Graph

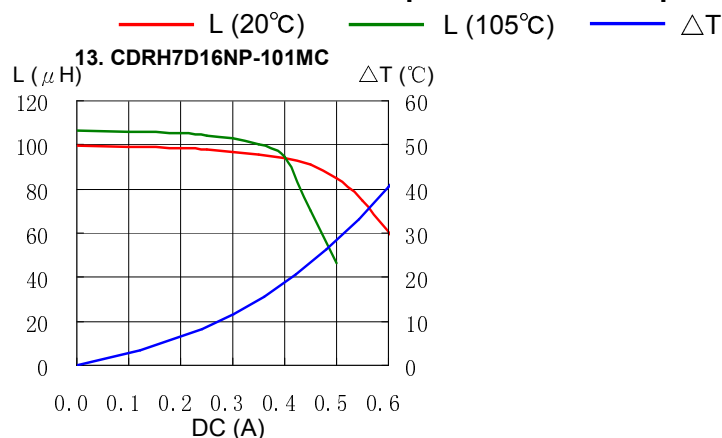

Solder Reflow Condition

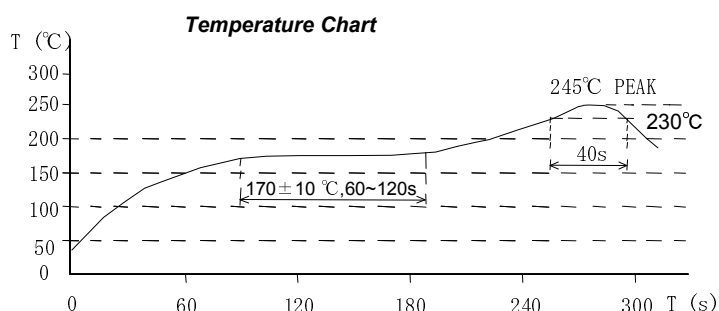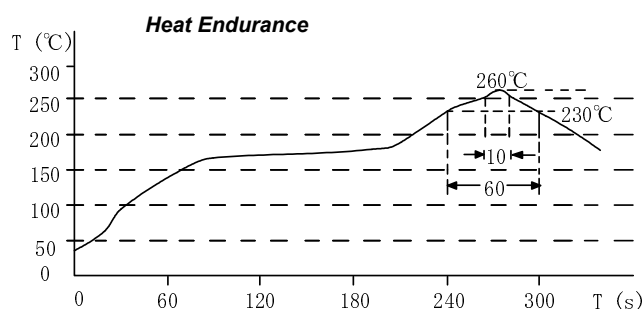

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel. +852-2880-6781
FAX. +852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel. +81-48-691-7300
FAX. +81-48-691-7340
sales@jp.sumida.com

Chicago

Tel. +1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel. +86-21-5836-3299
FAX. +86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel. +82-2-6237-0777
FAX. +82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel. +49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel. +86-755-8291-0228
FAX. +86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel. +65-6296-3388
FAX. +65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel. +49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel. +886-2-8751-2737
FAX. +886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel. +1-408-321-9660
FAX. +1-408-321-9308
sales@us.sumida.com