



## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Molex Connector Corporation](#)

[82-28-5750](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

7 6 5 4 3 2 1

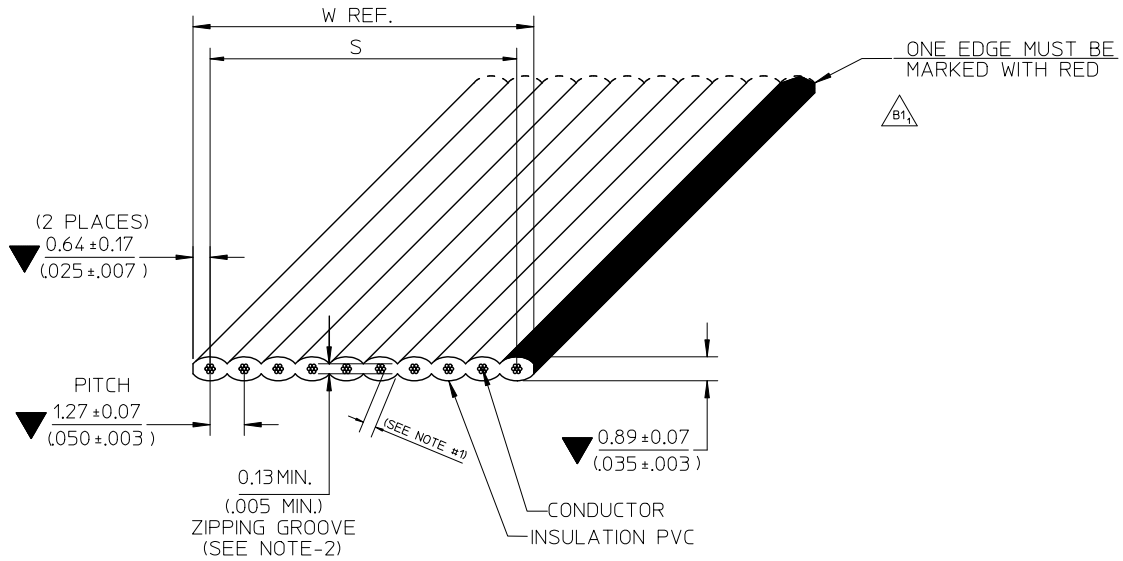

- NOTE :**
1. THE CABLE SHALL HAVE A MINIMUM OF 0.178mm. (.007") THICKNESS INSULATION AT ANY POINT
  2. RIP TEST:  
- THE 0.13mm. (.005") ZIPPING GROOVE SHALL BE CAPABLE OF BEING RIPPED BY HAND WITHIN THE RECESS, WITHOUT EXPOSING THE ADJACENT CONDUCTORS
  3. RoHS AND LEAD FREE COMPLIANT
  4. SPECIAL REQUIREMENT: N/A

PRODUCT APPLICATION	
<input checked="" type="checkbox"/>	GENERAL USE
<input type="checkbox"/>	AUTOMOTIVE
<input type="checkbox"/>	MEDICAL DEVICE

SEE CHANGE DETAIL. EC NO: THL2011-0054 DRAWN: CPANSAKHOM 2010/10/05 CHKD: PMEECHAI 2011/01/25 APPR: SVIRAT JAPOL 2011/03/31	QUALITY SYMBOLS ▽=3 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
		mm	INCH	DRAWN BY CPANSAKHOM	DATE 2006/07/12	TITLE FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED	MOLEX INCORPORATED	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		ANGULAR ±---°		APPROVED BY SVIRAT JAPOL		DATE 2006/07/12	DOCUMENT NO. SD-6800-001	SHEET NO. 1 OF 3
REV B1		SIZE A4		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

tb\_frame\_A4\_P\_ME\_T  
Rev. E 2006/04/15

6 5 4 3 2 1

7 6 5 4 3 2 1

SPECIFICATIONS

PHYSICAL

CONDUCTOR SPACING ----- 1.27(.050")  $\varnothing$  TO  $\varnothing$   
 WIRE GAUGE ----- 28 AWG(7/36) AWG, STRANDED TINNED  
 INSULATION ----- P.V.C GRAY (LEAD FREE)

AGENCY




U.L. STYLE NO. ----- 2651  
 TEMPERATURE RATING ----- -20°C TO 105°C  
 VOLTAGE RATING ----- 300V.MAX.  
 FLAMMABILITY RATING ----- VW-1

ELECTRICAL

CONDUCTOR RESISTANCE (D.C.) ----- 68 m OHMS/FT. MAX.  
 CHARACTERISTIC IMPEDANCE ----- 123 OHMS NOM. (GS)  
 100 OHMS NOM. (GSG)  
 CAPACITANCE ----- 9.1 pF/FT. NOM. (GS)  
 17.0 pF/FT. NOM. (GSG)  
 PROPAGATION DELAY ----- 1.4 ns/FT. NOM.  
 INSULATION RESISTANCE ----- 10M OHMS (10FT. SAMPLE)  
 DIELECTRIC WITHSTAND VOLTAGE ----- 2000 VRMS/MINUTE

GENERAL

NON-OPERATING TEMPERATURE ----- -20°C TO 105°C  
 FAULTS AND/OR SPLICES ----- 1/REEL MAX. 100<sup>+3</sup><sub>-0</sub> FT. (30.48<sup>+0.914</sup><sub>-0</sub> M.)/REEL  
 20FT. (6.096M.) MIN. LENGTH

SEE CHANGE DETAIL. EC NO: THL2011-0054 DRWN:CPANSAKHOM 2010/10/05 CHKD:PMEECHAI 2011/01/25 APPR:SVIRATJAPOL 2011/03/31	QUALITY SYMBOLS 	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	 THIRD ANGLE PROJECTION
			mm	INCH	MM/IN	NTS	INCH	
		4 PLACES	±---	±---	DRAWN BY	DATE	TITLE	
		3 PLACES	±---	±---	CPANSAKHOM	2006/07/12	FCB ROUND CONDUCTOR 1.27MM(.050)CENTERS PVC. 28AWG STR TINNED	
	2 PLACES	±---	±---	CHECKED BY	DATE	 MOLEX INCORPORATED		
	1 PLACE	±---	±---	APPROVED BY	DATE	DOCUMENT NO. SD-6800-001		
	ANGULAR ±---°		MATERIAL NO.		SHEET NO.			
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		2 OF 3			
			SIZE A4		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

6 5 4 3 2 1

ENGINEERING NO.  
6800-XX-XXXX  
 A B C D  
 A : CABLE 127mm. (050") CENTERS 28AWG STRANDED TINNED  
 B : CONDUCTOR SIZE ( AVAILABILITY 3 THROUGH 50 )  
 C : CABLE LENGTH 100FT. (30.48M)  
 D : A = INCHES  
 B = FEET

ENG. NO.	NO. OF COND.	DIMENSIONS INCHES (MM)		DIM. W (FEET)	ENGINEERING NO.	ORDER NO.
6800-3	3	254.0±0.18 (1000±0.07)	3.81±0.150	6800-03-100B	82-28-5703	
6800-4	4	381.0±0.18 (1500±0.07)	5.08±0.200	6800-04-100B	82-28-5704	
6800-5	5	508.0±0.18 (2000±0.07)	6.35±0.250	6800-05-100B	82-28-5705	
6800-6	6	635.0±0.18 (2500±0.07)	7.62±0.300	6800-06-100B	82-28-5706	
6800-7	7	762.0±0.18 (3000±0.07)	8.89±0.350	6800-07-100B	82-28-5707	
6800-8	8	889.0±0.18 (3500±0.07)	10.16±0.400	6800-08-100B	82-28-5708	
6800-9	9	1016.0±0.18 (4000±0.07)	11.43±0.450	6800-09-100B	82-28-5709	
6800-10	10	1143.0±0.18 (4500±0.07)	12.70±0.500	6800-10-100B	82-28-5710	
6800-11	11	1270.0±0.18 (5000±0.07)	13.97±0.550	6800-11-100B	82-28-5711	
6800-12	12	1397.0±0.18 (5500±0.07)	15.24±0.600	6800-12-100B	82-28-5712	
6800-13	13	1524.0±0.18 (6000±0.07)	16.51±0.650	6800-13-100B	82-28-5713	
6800-14	14	1651.0±0.18 (6500±0.07)	17.78±0.700	6800-14-100B	82-28-5714	
6800-15	15	1778.0±0.18 (7000±0.07)	19.05±0.750	6800-15-100B	82-28-5715	
6800-16	16	1905.0±0.23 (7500±0.09)	20.32±0.800	6800-16-100B	82-28-5716	
6800-17	17	2032.0±0.23 (8000±0.09)	21.59±0.850	6800-17-100B	82-28-5717	
6800-18	18	2159.0±0.23 (8500±0.09)	22.86±0.900	6800-18-100B	82-28-5718	
6800-19	19	2286.0±0.23 (9000±0.09)	24.13±0.950	6800-19-100B	82-28-5719	
6800-20	20	2413.0±0.23 (9500±0.09)	25.40±1.000	6800-20-100B	82-28-5720	
6800-21	21	2540.0±0.23 (10000±0.09)	26.67±1.050	6800-21-100B	82-28-5721	
6800-22	22	2667.0±0.23 (10500±0.09)	27.94±1.100	6800-22-100B	82-28-5722	
6800-23	23	2794.0±0.23 (11000±0.09)	29.21±1.150	6800-23-100B	82-28-5723	
6800-24	24	2921.0±0.23 (11500±0.09)	30.48±1.200	6800-24-100B	82-28-5724	
6800-25	25	3048.0±0.23 (12000±0.09)	31.75±1.250	6800-25-100B	82-28-5725	
6800-26	26	3175.0±0.23 (12500±0.09)	33.02±1.300	6800-26-100B	82-28-5726	
6800-27	27	3302.0±0.23 (13000±0.09)	34.29±1.350	6800-27-100B	82-28-5727	
6800-28	28	3429.0±0.23 (13500±0.09)	35.56±1.400	6800-28-100B	82-28-5728	
6800-29	29	3556.0±0.23 (14000±0.09)	36.83±1.450	6800-29-100B	82-28-5729	
6800-30	30	3683.0±0.23 (14500±0.09)	38.10±1.500	6800-30-100B	82-28-5730	
6800-31	31	3810.0±0.23 (15000±0.09)	39.37±1.550	6800-31-100B	82-28-5731	
6800-32	32	3937.0±0.23 (15500±0.09)	40.64±1.600	6800-32-100B	82-28-5732	
6800-33	33	4064.0±0.23 (16000±0.09)	41.91±1.650	6800-33-100B	82-28-5733	
6800-34	34	4191.0±0.23 (16500±0.09)	43.18±1.700	6800-34-100B	82-28-5734	
6800-35	35	4318.0±0.23 (17000±0.09)	44.45±1.750	6800-35-100B	82-28-5735	
6800-36	36	4445.0±0.23 (17500±0.09)	45.72±1.800	6800-36-100B	82-28-5736	
6800-37	37	4572.0±0.23 (18000±0.09)	46.99±1.850	6800-37-100B	82-28-5737	
6800-38	38	4699.0±0.23 (18500±0.09)	48.26±1.900	6800-38-100B	82-28-5738	
6800-39	39	4826.0±0.23 (19000±0.09)	49.53±1.950	6800-39-100B	82-28-5739	
6800-40	40	4953.0±0.23 (19500±0.09)	50.80±2.000	6800-40-100B	82-28-5740	
6800-41	41	5080.0±0.23 (20000±0.09)	52.07±2.050	6800-41-100B	82-28-5741	
6800-42	42	5207.0±0.23 (20500±0.09)	53.34±2.100	6800-42-100B	82-28-5742	
6800-43	43	5334.0±0.23 (21000±0.09)	54.61±2.150	6800-43-100B	82-28-5743	
6800-44	44	5461.0±0.23 (21500±0.09)	55.88±2.200	6800-44-100B	82-28-5744	
6800-45	45	5588.0±0.23 (22000±0.09)	57.15±2.250	6800-45-100B	82-28-5745	
6800-46	46	5715.0±0.23 (22500±0.09)	58.42±2.300	6800-46-100B	82-28-5746	
6800-47	47	5842.0±0.23 (23000±0.09)	59.69±2.350	6800-47-100B	82-28-5747	
6800-48	48	5969.0±0.23 (23500±0.09)	60.96±2.400	6800-48-100B	82-28-5748	
6800-49	49	6096.0±0.23 (24000±0.09)	62.23±2.450	6800-49-100B	82-28-5749	
6800-50	50	6223.0±0.23 (24500±0.09)	63.50±2.500	6800-50-100B	82-28-5750	

SEE CHANGE DETAIL. EC NO: THL2011-0054 DRAWN: CPANSAKHOM 2010/10/05 CHKD: PMEECHAI 2011/01/25 APPR: SVIRAT JAPOL 2011/03/31	QUALITY SYMBOLS 	GENERAL TOLERANCES (UNLESS SPECIFIED) mm      INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- ANGULAR ± --- °		DIMENSION STYLE MM/IN DRAWN BY CPANSAKHOM DATE 2006/07/12 CHECKED BY PMEECHAI DATE 2006/07/12 APPROVED BY SVIRAT JAPOL DATE 2006/07/12 MATERIAL NO. SEE CHART SIZE A/4		SCALE NTS TITLE FCB ROUND CONDUCTOR 1.27MM.(050)CENTERS PVC. 28AWG STR TINNED Molex MOLEX INCORPORATED DOCUMENT NO. SD-6800-001 SHEET NO. 3 OF 3	DESIGN UNITS INCH THIRD ANGLE PROJECTION
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			