

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Microsemi Commercial Components](#)
[LSM140G/TR13](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

1 Amp Schottky Rectifier LSM140G — LSM150G

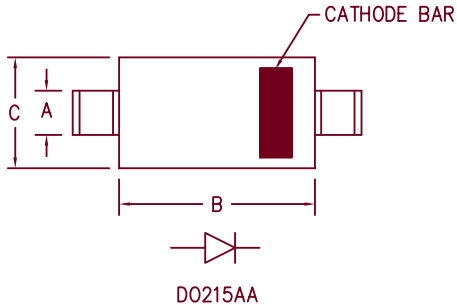

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.081	.087	2.06	2.21	
B	.160	.180	4.06	4.57	
C	.130	.155	3.30	3.94	
D	.077	.104	1.95	2.64	
E	.234	.256	5.95	6.50	

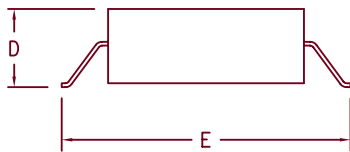

Microsemi Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage	Device Marking
LSM140G	40V	40V	L140
LSM145G	45V	45V	L145
LSM150G	50V	50V	L150

- Low Forward Voltage
- Schottky Barrier Rectifier
- Guard Ring Protection
- 150°C Junction Temperature
- VRRM 40 to 50 Volts

Electrical Characteristics		
Average forward current	I _{F(AV)} 1.0 Amps	T _A = 130°C, Square wave, R _{θJC} = 25°C/W
Maximum surge current	I _{FSM} 50 Amps	8.3ms, half sine, T _J = 150°C
Max peak forward voltage	V _{FM} .39 Volts	I _{FM} = 0.1A; T _J = 25°C*
Max peak forward voltage	V _{FM} .58 Volts	I _{FM} = 1.0A; T _J = 25°C*
Max peak reverse current	I _{RM} 1.0 mA	V _{RRM} , T _J = 25°C
Typical junction capacitance	C _J 60pF	V _R = 5.0V, T _J = 25°C
*Pulse test: Pulse width 300 μsec. Duty cycle 2%		

Thermal and Mechanical Characteristics		
Storage temperature range	T _{STG}	-55°C to 175°C
Operating junction temp range	T _J	-55°C to 150°C
Typical thermal Resistance	R _{θJC}	25°C/W Junction to case
Weight		.0047 ounces (.013 grams) typical

LSM140G — LSM150G

Figure 1
 Maximum Forward Characteristics

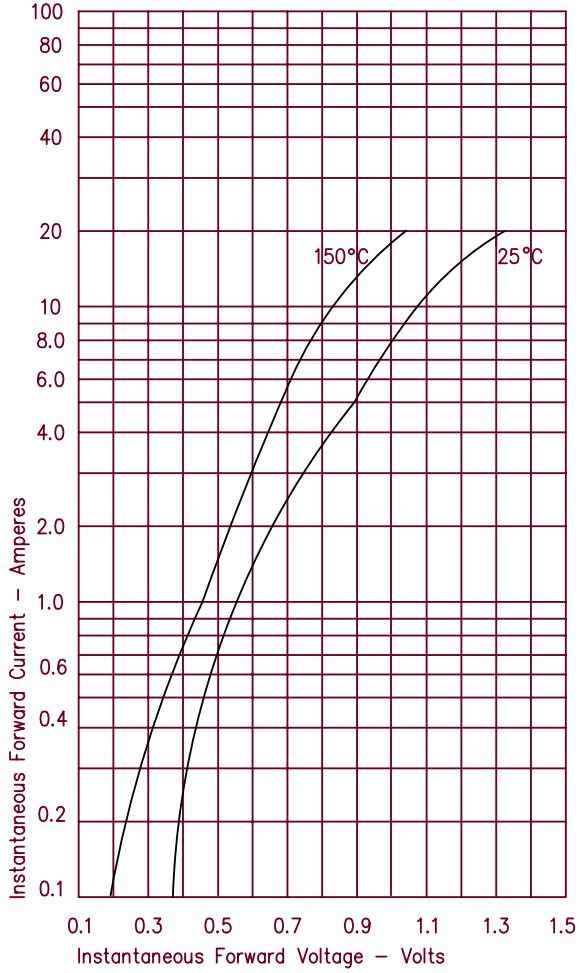


Figure 3
 Typical Junction Capacitance

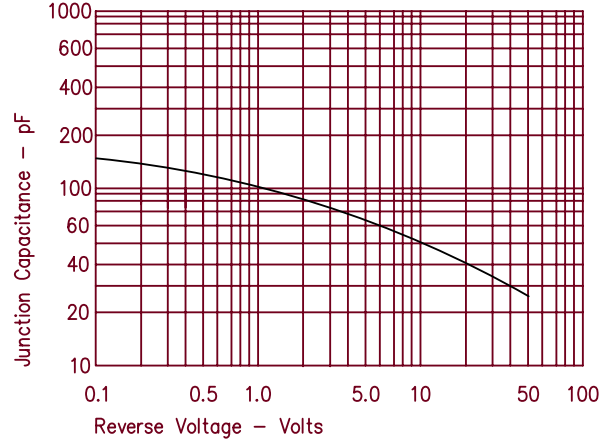


Figure 2
 Typical Reverse Characteristics

