

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:


[ICCNEXERGY](#)
[FW5012-760-NC](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

FW50 Series
50 Watt AC Adapter



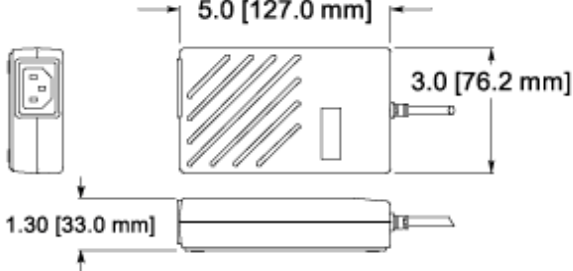

Features
Wide range AC input
Fully enclosed plastic case
Fully regulated output
High efficiency
Warranty: 5 years

Environmental
Operating temperature..... 0°C to 40°C
Storage temperature..... -55°C to 85°C
Weight: 0.8 lbs

EMI
Meets FCC class B, CISPR 22 class B

Safety
UL UL1950
cUL CSA 22.2 NO. 950
Nemko EN 60950
CE Marked


Electrical specifications

Input
Voltage 100-240VAC
Current 1.0 Amp @ 100VAC
Frequency 47 – 63 Hz
AC Cord..... Optional
Input connector..... 3 Pin IEC 320 input receptacle

Output
Line regulation..... TYP +/- 1%
Load regulation..... TYP +/- 5%
Set point..... +/- 3% at 60% load
Hold up time..... 20ms minimum at full load 115VAC
Over voltage protection Built-in
Over current protection Built-in
Short circuit protection..... Pulsing Mode, auto recovery
Efficiency..... 80% minimum at full load and 115 VAC
Transient response..... 2ms for 50% load change typical
Ripple/noise (V_{p-p}) +/- 1% (20 MHz bandwidth)
Output connector..... barrel type (5.5 x 2.5 x 9.5mm)

Output Electrical Specifications

Model No.	Voltage	Power	Current
FW5012-760	12V	50W	4.15A
FW5018-760	18V	50W	2.75A
FW5024-760	24V	50W	2.10A

Polarity: **COM**  **+V**