

Excellent Integrated System Limited

Stocking Distributor




Click to view price, real time Inventory, Delivery & Lifecycle Information:

[CUI Inc.](#)

[PJ-022](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

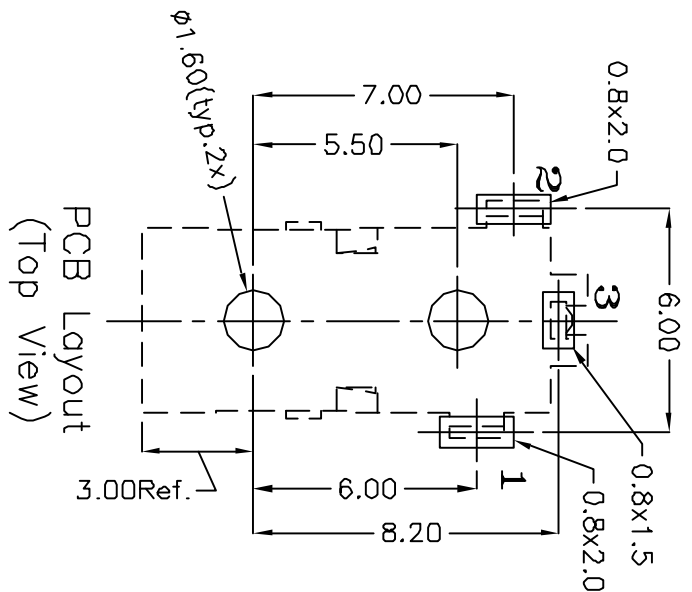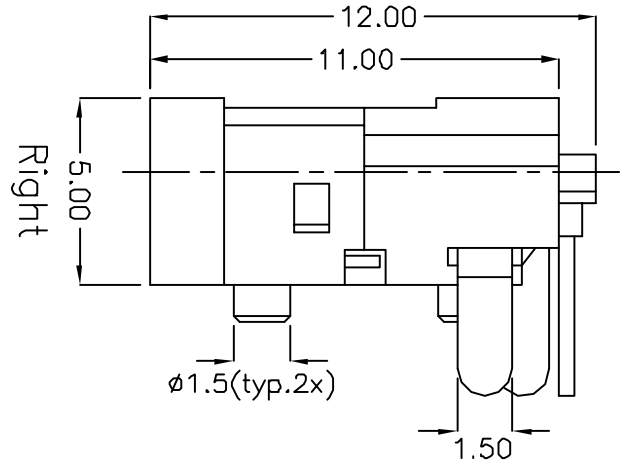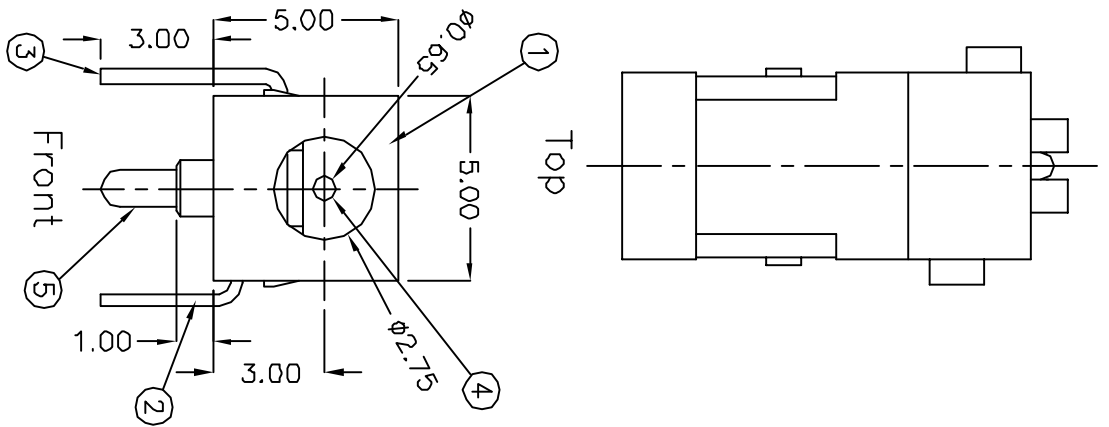

- Specifications:
1. Insulation Resistance: 100MΩhms min. (initial)
 2. Contact Resistance (initial): 30mΩhms max at 100mA(max) 1KHz.
 3. Dielectric Withstand Voltage: AC 250V, 50 to 60Hz for 1 minute.
 4. Endurance: 5,000 Cycles 10 ~ 20 cycles per minute.
 5. Rated Voltage: 3.15 Volts DC
 6. Rated Current: 2.0 Amps DC
 7. Operating Temp: -25 to +85 deg. C.

5	Shield	SPCC	Nickel	1	40T
4	Center Pin	PBW	Silver	1	Ø0.65
3	Shunt Terminal	Brass	Silver	1	40T
2	Spring Contact	Ti-Cu Alloy	Silver	1	30T
1	Plastic Housing	Polymide	Black Color	1	ULV94V-0
No.	Description	Material	Finish	Qty	Remark



9615 SW Allen, Suite 103
Beverton, OR 97006
Phone: (503) 643-4899
800-275-4899
Fax: (503) 372-1266
Website: www.cui.com

TITLE: **Ø0.65 DC Power Jack, PCB Mount**

PART NO. PJ-022 UNITS: Millimeters

DRAWN BY: Todd White APPROVED BY: SCALE: 5x

PC FILE NAME: PJ-022.dwg

COPYRIGHT 2001 BY CUI INC.