

Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[CUI Inc.](#)
[PJ-023](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

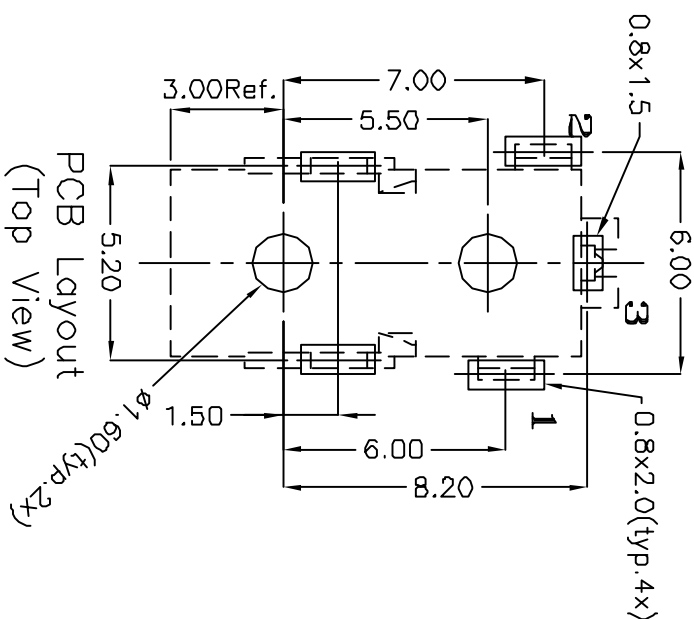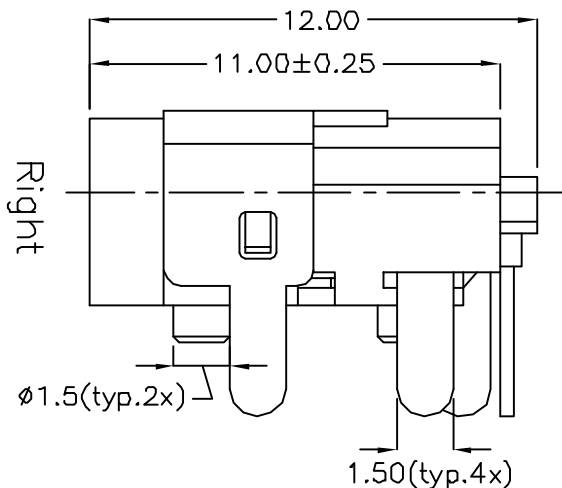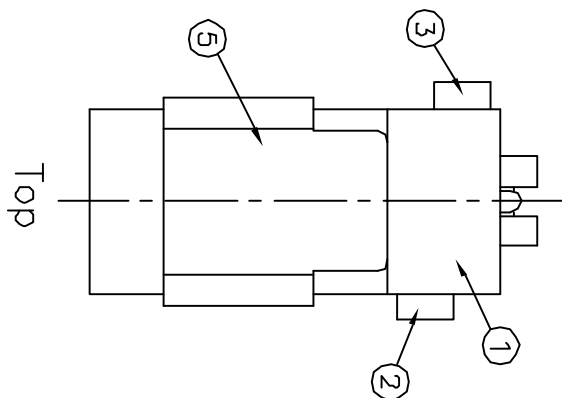

Note: ± 0.2 for PCB Layout

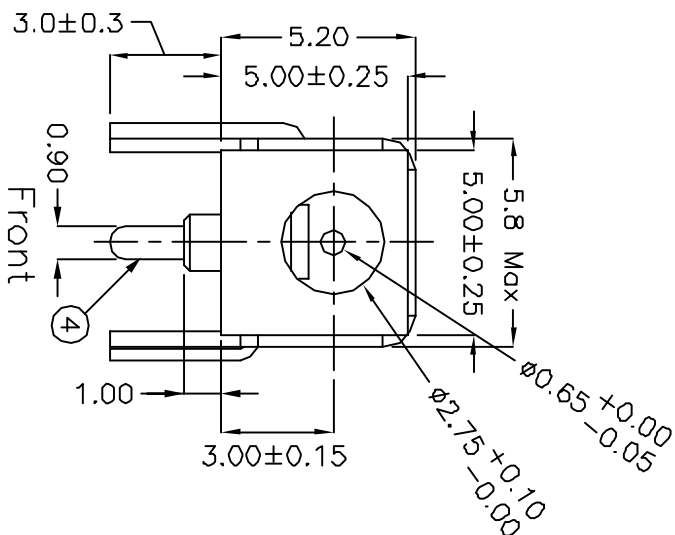

- Specifications:
1. Insulation Resistance: 100M Ω min. (initial)
 2. Contact Resistance (initial): 30m Ω max at 100mA(max) 1KHz.
 3. Dielectric Withstand Voltage: AC 250V, 50 to 60Hz for 1 minute.
 4. Endurance: 5,000 Cycles 10 ~ 20 cycles per minute.
 5. Rated Voltage: 3.15 Volts DC
 6. Rated Current: 2.0 Amps DC
 7. Operating Temp: -25 to +85 deg. C.

Unless otherwise specified:
Dimensions Tolerance on Decimals ± 0.3

No.	Description	Material	Finish	Qty	Note
5	Shield	SPCC	Nickel	1	40T
4	Center Pin	PBW	Silver	1	$\phi 0.65$
3	Shunt Terminal	Brass	Silver	1	40T
2	Spring Contact	Ti-Cu Alloy	Silver	1	30T
1	Plastic Housing	Polyamide	Black Color	1	UL94V-0



9615 SW Allen, Suite 103
Beverton, OR 97006
Phone: (503) 643-4899
800-275-4899
Fax: (503) 372-1266
Website: www.cui.com

TITLE: **$\phi 0.65$ DC Power Jack w/Shield, PCB Mount**

PART NO. PJ-023 UNITS: Millimeters
DRAWN BY: Todd White APPROVED BY: SCALE: 5x