

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Alpha Wire](#)
[FITFBT-1 NC032](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

FIT® Preferred Heat Shrink Products

POWERFUL FLAMELESS BUTANE TORCH

FIT® FBT-1

CHOOSE **FIT**® FBT-1 FOR:

- Where High Volume Flameless Heat is Required
- Portable Flameless Heat Repair
- Adjustable Temperature Control
- **FIT**® Preferred Heat Shrink Tubing Applications

FIT® FBT-1 APPLICATIONS:

- Maintenance/Repair
- Marine
- Automotive
- Aircraft

CHARACTERISTICS

OPERATING TEMPERATURE:

- Up to 750°C (1400°F)

COLOR DESCRIPTION:

- Blue

PHYSICAL PROPERTIES:

- Length: 190mm (7.5 in)
- Weight: (when gas-filled) 135 g
- Nozzle Size: I.D.: 14mm (0.55 in)
O.D.: 20mm (0.79 in)
- Operating Time (one gas filling):
Approximately 120 minutes at Mid Setting

CHEMICAL PROPERTIES:


- Butane Container Capacity: 20ml
- Refill: Standard Butane Fuel

AVAILABILITY

- One Piece Per Package



New!

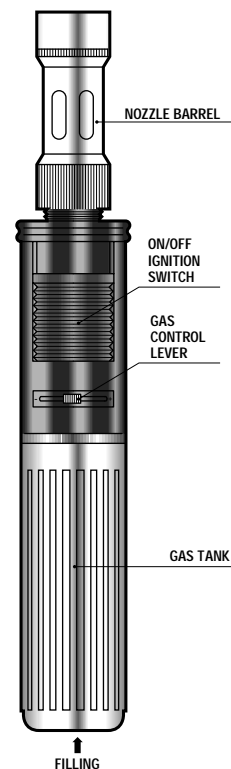

THIS TOOL HAS BEEN ESPECIALLY DESIGNED FOR USE WITH 100% BUTANE GAS.

ANY OTHER BUTANE-PROPANE MIX OR OTHER FUEL GASES SHOULD NOT BE USED.

TO INSURE SAFE OPERATION WHEN USING THE **FIT**® FBT-1, PLEASE READ ALL INSTRUCTIONS CAREFULLY PRIOR TO USE.

BUTANE IS NOT INCLUDED.