

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Molex Connector Corporation](#)
[0022112061](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

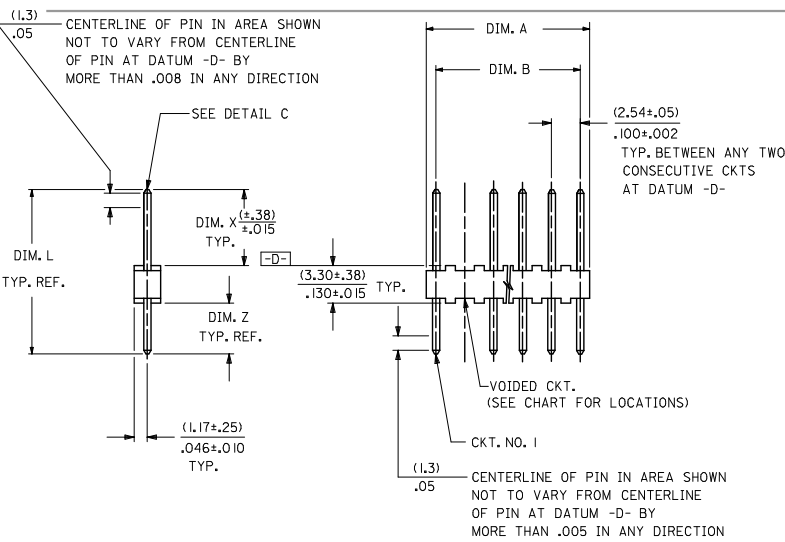

CKTS. NO. OF	DIM. B	DIM. A
2	(2.54 ± .05)	(4.83 ± .20)
3	(1.00 ± .002)	(1.90 ± .008)
4	(5.08 ± .15)	(7.37 ± .20)
5	(2.00 ± .005)	(2.90 ± .008)
6	(1.62 ± .13)	(9.91 ± .20)
7	(3.00 ± .005)	(3.90 ± .008)
8	(10.16 ± .13)	(12.45 ± .20)
9	(4.00 ± .005)	(4.90 ± .008)
10	(12.70 ± .15)	(14.99 ± .23)
11	(5.00 ± .006)	(5.90 ± .009)
12	(15.24 ± .15)	(17.53 ± .23)
13	(6.00 ± .006)	(6.90 ± .009)
14	(17.78 ± .15)	(20.07 ± .23)
15	(7.00 ± .006)	(7.90 ± .009)
16	(20.32 ± .18)	(22.61 ± .25)
	(8.00 ± .007)	(8.90 ± .010)
	(22.86 ± .18)	(25.15 ± .25)
	(9.00 ± .007)	(9.90 ± .010)
	(25.40 ± .18)	(27.69 ± .25)
	(1.000 ± .007)	(1.090 ± .010)
	(27.94 ± .20)	(30.23 ± .28)
	(1.100 ± .008)	(1.190 ± .011)
	(30.48 ± .20)	(32.77 ± .28)
	(1.200 ± .008)	(1.290 ± .011)
	(33.02 ± .20)	(35.31 ± .28)
	(1.300 ± .008)	(1.390 ± .011)
	(35.56 ± .20)	(37.85 ± .28)
	(1.400 ± .008)	(1.490 ± .011)
	(38.10 ± .20)	(40.39 ± .28)
	(1.500 ± .008)	(1.590 ± .011)



RECOMMENDED P.C. BOARD HOLE DIMENSIONS

LEGEND

A-4380-N * * * * *

NO. OF CKTS.

VERSION

LETTER CHANGES WHEN PIN NO. OR PRESS DIM. CHANGES.

PLATING CODE PER SDES-88.

VOID LOCATION

NO VOID=SEE 4030 SERIES DWG. WITH VOIDS=NO. CORRESPONDS TO CKT. NO. VOIDED. MULT. VOIDS=START WITH 51 AND ARE ASSIGNED CONSECUTIVELY.

SECONDARY OPERATIONS	
CODE	PACKAGE
BLANK	BULK
	PER PK-4030-001


NOTES:

1. MATERIAL: NYLON, UL 94V-O, COLOR: WHITE
2. FINISH:

- (197) OVERALL REFLOWED MATTE TIN: 0.00152/.000060 MIN. OVER 0.00127/.000050 MIN. NICKEL OVERALL.
- (241) SELECT GOLD: 0.00051/.000020 MIN. SELECT TIN: 0.00254/.000100 MIN. OVERALL NICKEL UNDERPLATE: 0.00127/.000050 MIN.

3. PARTS CONFORM TO PRODUCT SPECIFICATION PS-10-07.
4. PACKAGING: SEE LEGEND
5. PINS MUST CONFORM TO SOLDERABILITY SPEC. SMES-152.
6. PIN PUSH OUT FORCE: 2 LBS. MIN.
7. PARTS ARE STACKABLE END TO END AND SIDE TO SIDE ON (2.54)/.100 CENTERS.
8. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

REINSTATE 22112071 REC NO: UCP2015-3608 DRW/KIP/PER 2015/03/04 CHK/DANG/EN 2015/03/04 APPROVE/SMITH 2015/03/10	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)				DIMENSION STYLE		SCALE	DESIGN UNITS	 THIRD ANGLE PROJECTION	
						MM/IN		---	INCH		
		mm INCH				DRAWN BY	DATE	TITLE			
		4 PLACES ± ±				SAMIEC	1984/09/07	KK HEADER			
		3 PLACES ± ±				CHECKED BY	DATE	(2.54)/.100 CENTERS			
		2 PLACES ± 0.25 ± .014				DS	1984/09/07	4030 WITH VOIDS			
		1 PLACE ± 0.36 ±				APPROVED BY	DATE	molex			
		0 PLACE ± ±				KJA	1984/09/07				
		ANGULAR ±1/2°				MATERIAL NO.					DOCUMENT NO.
		REV	DESCRIPTION	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SEE CHART			SDA-4380
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											



ENG. NO.	PIN NO.	DIM. L	DIM. X	DIM. Z	DIM. G	DIM. T
A-4380-NA197-*	42663-0302	(14.22) .560	(7.49) .295	(3.43) .135	N/A	OVERALL
A-4380-NA241-*	42663-0305	(14.22) .560	(7.49) .295	(3.43) .135	(3.56) .140	(3.43) .135
A-4380-NC197-*	42663-0562	(17.53) .690	(11.13) .438	(3.10) .122	N/A	OVERALL

CHANGE PIN EC NO. UCP2012-1821 DRAWN BY: DRWINMSR0H CHKD BY: CHKDKM1P0R APPROVED BY: APPROF0M1TH DATE: 2017/01/13 DATE: 2017/01/13 DATE: 2017/02/02	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	 THIRD ANGLE PROJECTION	
					MM/IN		---	INCH		
			4 PLACES ± --- ± ---		DRAWN BY	DATE	TITLE			
			3 PLACES ± --- ± ---		SAMIEC	1984/09/07				
			2 PLACES ± --- ± ---		CHECKED BY	DATE	KK HEADER (2.54)100 CENTERS 4030 WITH VOIDS			
			1 PLACE ± --- ± ---		DS	1984/09/07				
			ANGULAR ± 1/2°		APPROVED BY	DATE	MOLEX INCORPORATED			
					KJA	1984/09/07				
					MATERIAL NO.		DOCUMENT NO.			SHEET NO.
					SEE CHART		SDA-4380			2 OF 3
REV ZA		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							SIZE C THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	



A-4380-NA197-*			A-4380-NA241-*			A-4380-NC197-*		
PART NO.	ENG. NO.	VOID CKT.	PART NO.	ENG. NO.	VOID CKT.	PART NO.	ENG. NO.	VOID CKT.
22-04-2038	A-4380-3A197-2	2	22-II-203I	A-4380-3A241-I	1	22-04-2063	A-4380-6C197-2	2
22-04-204I	A-4380-4A197-2	2	22-II-206I	A-4380-6A241-2	2	22-04-2073	A-4380-7C197-2	2
22-04-2I6I	A-4380-I6A197-2	2	22-II-207I	A-4380-7A241-2	2			
			22-II-208I	A-4380-8A241-2	2			

SEE SHEET 1 EC NO. UCP2015-3608 DRAWN BY: CHKONGJEN APPROVED BY: JAPPE-SMITH ZAS	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION		
			(UNLESS SPECIFIED)		IN/MM		---	INCH	⊙ □		
					DRAWN BY	DATE	TITLE				
			4 PLACES ± --- ± ---		KKS	1984/09/07	KK HEADER				
			3 PLACES ± --- ± ---		CHECKED BY	DATE	(2.54)/.100 CENTERS				
			2 PLACES ± --- ± ---		DS	1984/09/07	4030 WITH VOIDS				
			1 PLACE ± --- ± ---		APPROVED BY	DATE	molex				
			0 PLACE ± ±								
			ANGULAR ±1/2°		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SDA-4380		3 OF 3		
		SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							