

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Pulse Electronics Corporation](#)


[PG1083.102NLT](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SMT Power Inductors

Round wire Coils- PG1083NL series

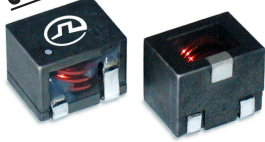

- 🔌 Inductance Range: 1.0uH to 50.0uH
- 🔌 Height: 12.5mm Max
- 🔌 Current Rating: up to 70A_{pk}
- 🔌 No Thermal Aging
- 🔌 Footprint: 21.7mm x 21.5mm Max
- 🔌 RoHS Compliant

Electrical Specifications @ 25°C — Operating Temperature -40°C to +130°C¹






Part Number	Inductance ² @ Irated (μH Typical)	Irated ³ (A)	Controlled Electrical Specs.		Saturation ⁵ Current Isat (A TYP)		Heating Current ⁶ Idc (A TYP)	Core Loss Factor ⁷ (K2)	Size X (REF.)	Height (MAX.)
			DCR ⁴ (mΩ) MAX	Inductance @ 0Adc (μH ± 20%)	25°C	100°C				
PG1083.102NL	0.95	40	1.4	1.00	70	65	40	17.9	0.098 [2.50] BOTTOM VIEW A	0.417 [10.6]
PG1083.152NL	1.35	40	1.4	1.50	52	45	40	26.8		
PG1083.222NL	1.95	34	1.8	2.20	46	37	34	29.5		
PG1083.332NL	2.70	28	2.2	3.30	37	33	28	35.4		
PG1083.472NL	4.10	26	2.8	4.70	30	24	26	50.4		
PG1083.682NL	6.10	22	3.8	6.80	26	20	22	52.1		
PG1083.103NL	8.60	17.5	6.0	10.5	22.5	18	17.5	62.6	0.054 [1.40] BOTTOM VIEW B	0.492 [12.50]
PG1083.153NL	12.6	14	9.2	15.2	18.5	14	14.0	74.1		
PG1083.253NL	21.0	11	15.0	24.5	14.5	12	11.0	93.9		
PG1083.323NL	27.9	9	21.5	32.0	12.5	10	9.0	107.3		
PG1083.503NL	45.2	7.4	32.6	50.0	10.0	8.5	7.4	134.1		

- Notes:**
- Actual temperature of the component during system operation (ambient plus temperature rise) must be within the standard operating range.
 - Inductance at Irated is a typical inductance value for the component taken at rated current.
 - The rated current as listed is either the saturation current (@ 25°C) or the heating current depending on which value is lower.
 - The DCR of the part is measured at an ambient temperature of 20°C±3°C from point a to b as shown below on the mechanical drawing.
 - The saturation current, Isat, is the current at which the component inductance drop by 20% (typical) at an ambient temperature. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effect) to the component.
 - The heating current, Idc, is the DC current required to raise the component temperature by approximately 40°C. The heating current is determined by mounting the component on a typical PCB and applying current for 30 minutes. The temperature is measured by placing the thermocouple on top of the unit under test. Take note that the components' performance varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
 - the components' performance varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
 - Core loss approximation is based on published core data (at 100°C):
 $Core\ Loss = K1 * (f)^{1.378} * (K2 * \Delta I)^{2.864}$ in mW
 K1 = 1.01E-9
 f = switching frequency in KHz
 K1 & K2 = core loss factors
 ΔI = delta I across the component in Ampere
 K2*ΔI = one half of the peak to peak flux density across the component in Gauss
 Unless otherwise specified, all testing is made at 100KHz, 0.1Vac
 - Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PG1083.682NL becomes PG1083.682NLT). Pulse complies with industry standard tape and reel specification EIA481. The tape and reel for this product has a width (W=44.0mm), pitch (Po=32.0mm). The depth (Ko) has two types: 1) 10.6 mm for parts with height of 10.6mm max, 120 pieces/reel; 2) 12.9mm for the parts of 12.5mm max, 100 pieces/reel.

Mechanicals

Schematic


PG1083.XXXNL

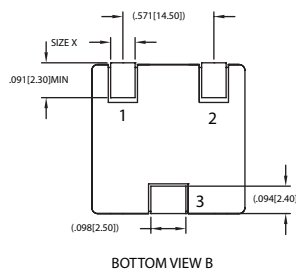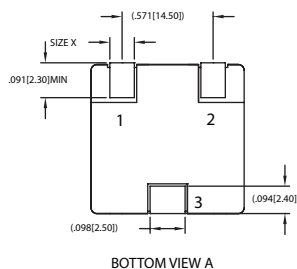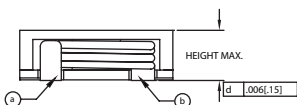

Weight.....18.6 grams
 Tape and Reel.....100/tray

Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances are ± $\frac{0.01}{0.25}$




SMT Power Inductors


Round wire Coils- PG1083NL series



Typical Inductance VS DC bias

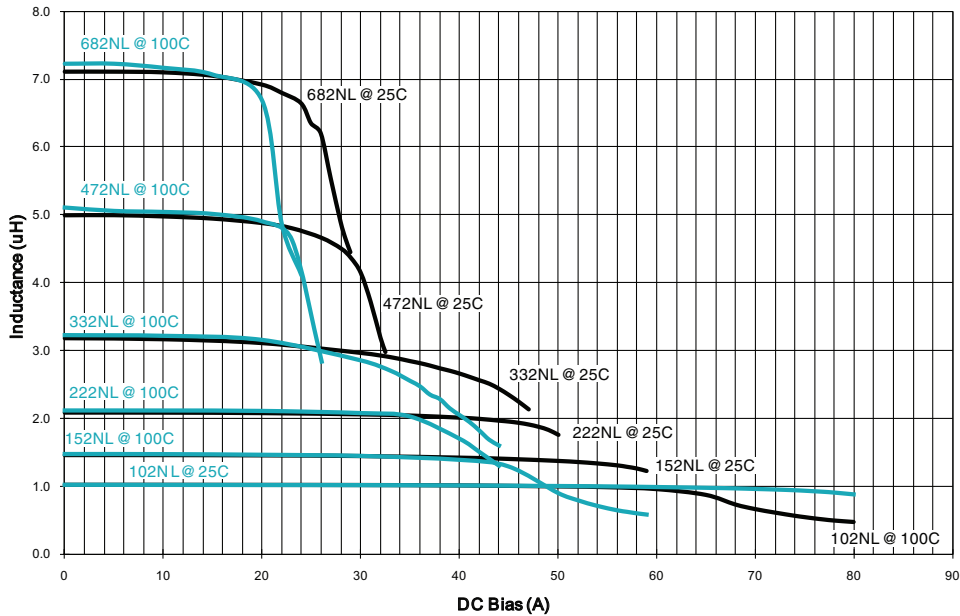

Typical Inductance VS DC bias

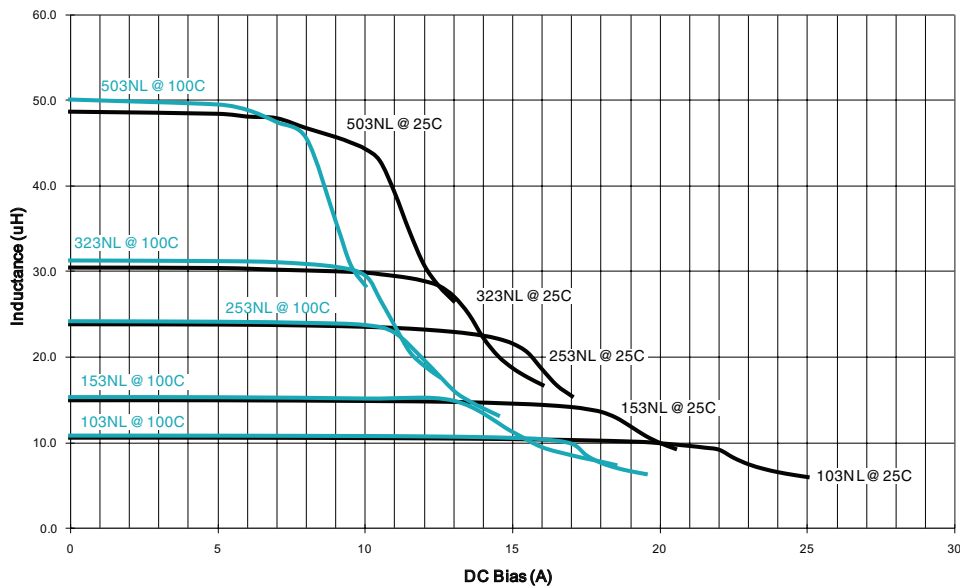

For More Information

Pulse Worldwide Headquarters
 12220 World Trade Drive
 San Diego, CA 92128
 U.S.A.

Pulse Europe
 Zeppelinstrasse 15
 71083 Herrenberg
 Germany

Pulse China Headquarters
 B402, Shenzhen Academy of
 Aerospace Technology Bldg.
 10th Kejinan Road
 High-Tech Zone
 Nanshan District
 Shenzhen, PR China 518057

Pulse North China
 Room 2704/2705
 Super Ocean Finance Ctr.
 2067 Yan An Road West
 Shanghai 200336
 China

Pulse South Asia
 135 Joo Seng Road
 #03-02
 PM Industrial Bldg.
 Singapore 368363

Pulse North Asia
 3F No. 198, Zhongyuan Road
 Zhongli City
 Taoyuan County (32068)
 Taiwan

Tel: 858 674 8100
 Fax: 858 674 8262

Tel: 49 7032 7806 0
 Fax: 49 7032 7806 12

Tel: 86 755 33966678
 Fax: 86 755 33966700

Tel: 86 21 62787060
 Fax: 86 2162786973

Tel: 65 6287 8998
 Fax: 65 6287 8998

Tel: 886 3 4356768
 Fax: 886 3 4356823

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2013. Pulse Electronics, Inc. All rights reserved.