

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Tamura](#)
[318AS09035](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



REV. Status

REVISION -	
10/25/01 RJ	
REVISION A	
REVISED PLUG	
LOCATION. ADDED	
RoHS	
05/22/06 MP	

AC-DC UL/cUL ADAPTOR DC 9V 350mA

A. Electrical specifications

1. Input voltage: AC 120V ±10% 60Hz ±0.5Hz
2. Output voltage and current: DC 9V at 350mA

V_{in}	100% Load	No Load
108	6.5VDC MIN	-
120	8.5-9.5VDC	14.0VDC MAX
132	-	15.0VDC MAX




NOTE: Specification applies after 10 minutes warm-up with full load and at any operating temperature.

3. Operating temperature: -10 °C to +40 °C
4. Storage temperature: -20 °C to +85 °C
5. Operating and Storage Humidity: 0 to 95% without condensation
6. Withstand voltage: 1000Vrms 1 minute @ input to output


B. Typical performance data test Condition:
 Ta= +25°C measured after 10 minute warm-up with input at 120V 60Hz

C. Safety agencies
 UL and cUL File No. E218172

D. Nameplate: Information is as follows:
 Metallic letters on a black background




TYPICAL PERFORMANCE CHART

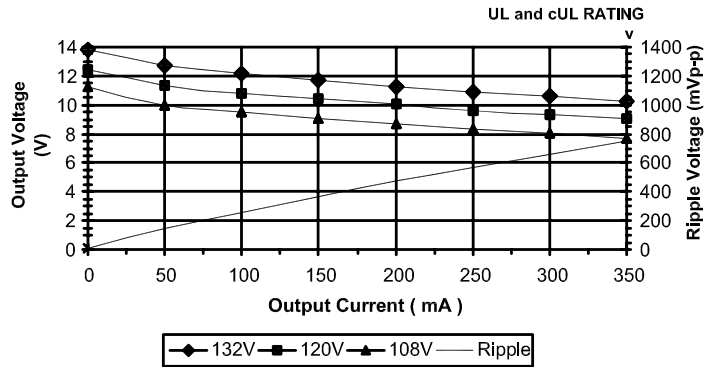

E. Mechanical Specifications

All dimensions shown are nominal unless otherwise specified

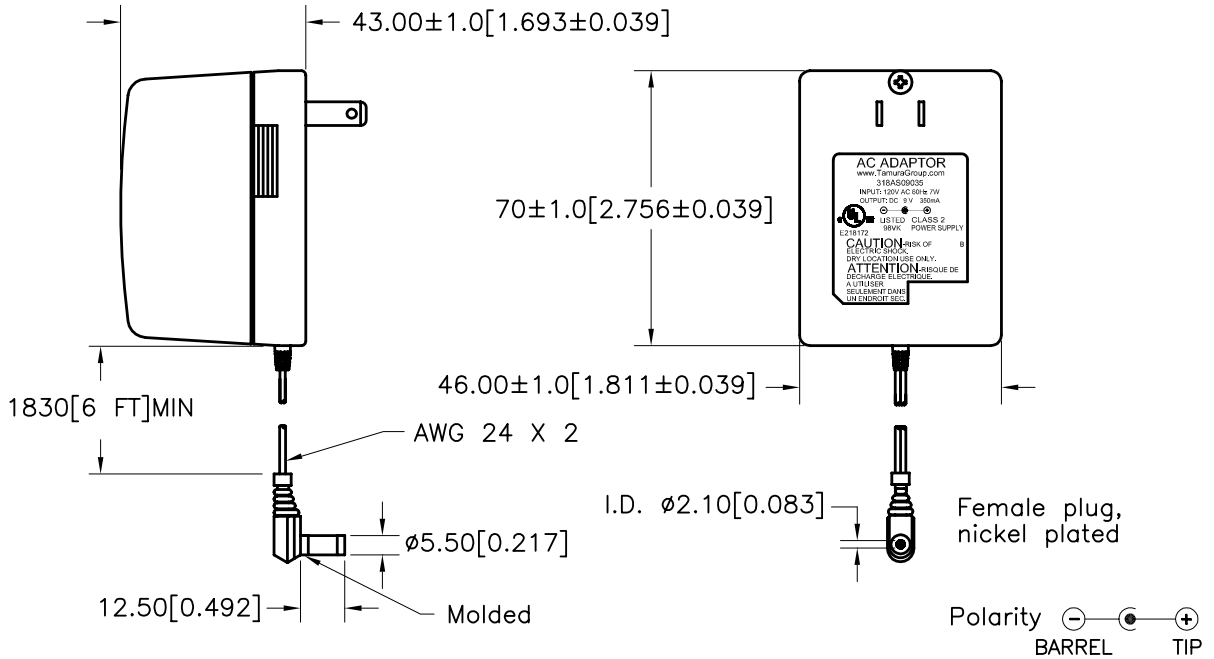

PREPARED BY:
 K. BRENNAN

ENGINEER: M. PITCHAI	DWG CONTROL NO. P-A7-12899 ACAD\PS\A7128991.DWG	REV A	UL/cUL DC 9V 350mA POWER SUPPLY	318AS09035 MODEL SPECIFICATION
QUALITY CONTROL: T. CLEM	TAMURA CORPORATION OF AMERICA 43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624 (951) 699-1270 FAX 9516769482			
APPROVED: Y. SEKIGUCHI	PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.			