

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Hirose Electric Co Ltd](#)


[MS-166\(01\)](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

Subminiature Coaxial Switch 1.2 mm High, DC to 11 GHz

MS-166 Series

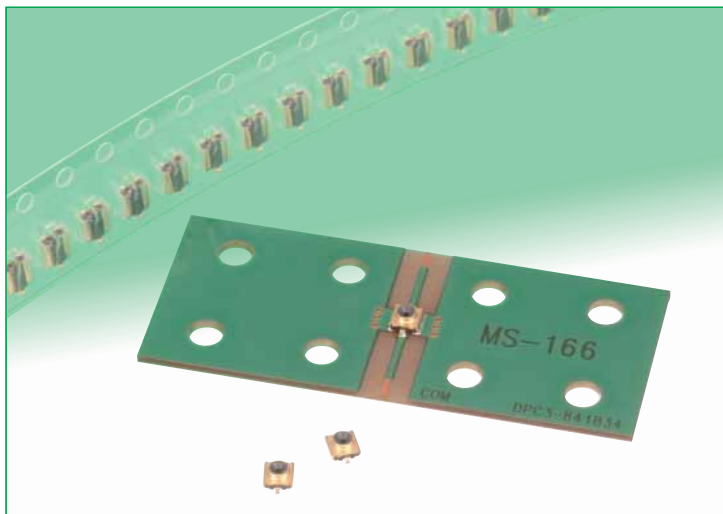

Space-saving design
Low profile -1.2 mm protrusion above the board.
Lightweight -0.016 g. total weight.

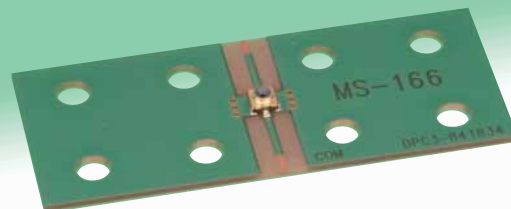

Overview

Developed for inspection of high frequency circuits used in portable terminals. Verification of the circuit performance is accomplished by simply inserting the external plug in the board mounted receptacle. This action re-directs the circuit from normal condition to the plug side. Removing the plug restores circuit to its normal condition.

Features

1. Low insertion loss

- 0.15 dB typical at 2.5 GHz (not mated with the plug).
- 0.2 dB typical at 6 GHz (not mated with the plug).
- 0.4 dB typical at 11 GHz (not mated with the plug).

2. Space-saving design

2.3 mm x 2.3 mm occupied board space.

3. Low profile

1.2 mm protrusion above the board.

4. Lightweight

0.016 g. total weight (without vacuum cap).

5. Miniaturization of Equipment Holes

The outside diameter of the tip of the plug connectors is a narrow 2.8 mm which permits a great reduction in the size of the equipment holes.

6. Durability

50 mating/unmating cycles, with corresponding plug.

7. Performs over a wide frequency range

Applicable frequencies range over a wide band, from DC to 11 GHz.

8. Board placement with automatic equipment

Packaged on tape-and-reel. Also available with a vacuum pick-up cap over each switch.

9. RoHS compliant

All components and materials comply with the requirements of the EU Directive 2002/95/EC.

Applications


Portable terminals, ETC, notebook computers (Bluetooth), wireless LAN, POS terminals, GPS terminals, PDA, and any small devices requiring verification of antenna/circuit performance.

Comparison with the existing MS-156HF


MS-156HF

MS-166


Footprint

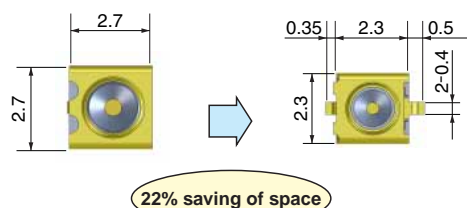

Height

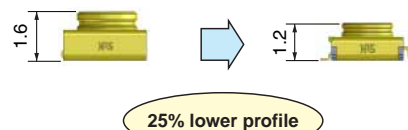

Weight



SMA conversion adapters



■Product Specifications

| | Not mated with the plug | Open Mated with (MS-166-HRMJ-1) |
|-----------------------------|--|--|
| Operating temperature range | -40°C to +85°C | |
| Rated power | 2W | |
| Frequency range | DC to 11GHz | DC to 8GHz |
| V.S.W.R. | 1.2 max. (DC to 2.5GHz) 1.3 max. (2.5GHz to 6GHz) 1.5 max. (6GHz to 11GHz) | 1.4 max. (DC to 3GHz) 1.8 max. (3GHz to 8GHz) |
| Insertion loss | 0.15 dB max. (DC to 2.5GHz) 0.2 dB max. (2.5GHz to 6GHz) 0.4 dB max. (6GHz to 11GHz) | 0.5 dB max. (DC to 3GHz) 0.7 dB max. (3GHz to 8GHz) |
| Isolation loss | ————— | 20 dB min. (DC to 3GHz) 15 dB min. (3GHz to 6GHz) 12 dB min. (6GHz to 11GHz) |


| Item | Specification | Conditions |
|--|--|---|
| 1. Contact resistance | 100 mΩ max. | 100 mA |
| 2. Insulation resistance | 1000 MΩ min. | 100 V DC |
| 3. Withstanding voltage | No flashover or insulation breakdown | 100 V AC / 1 minute |
| 4. Vibration | No electrical discontinuity of 1 μs or longer | Frequency: 10 to 55 Hz, single amplitude of 1.5 mm, 2 hours in each of the 3 axis. |
| 5. Thermal shock | No electrical discontinuity of 1 μs or longer | Acceleration of 490 m/s ² , 6 ms duration, sine half-wave waveform, 3 cycles in each of the 3 axis. |
| 6. Temperature cycle | Contact resistance: 100 mΩ max. Insulation resistance: 10 MΩ min. | Temperature: -55°C → +15°C to +35°C → +85°C → +15°C to +35°C Time: 30 → 2 to 3 → 30 → 2 to 3 (Minutes) 100 cycles |
| 7. Hight temperature exposure | Contact resistance: 100 mΩ max. Insulation resistance: 10 MΩ min. | 96 hours at 85°C |
| 8. Low temperature exposure | Contact resistance: 100 mΩ max. Insulation resistance: 10 MΩ min. | 96 hours at -55°C |
| 9. Humidity | Contact resistance: 100 mΩ max. Insulation resistance: 10 MΩ min. | 96 hours at 40±2°C, and humidity of 90 to 95% |
| 10. Durability (mating/un-mating, with corresponding plug) | Contact resistance: 100 mΩ max. | 50 cycles |

■Materials



| Part | Material | Finish | Remarks |
|------------------|------------------|-----------------------|---------|
| Shell | Phosphor bronze | Gold plated | ————— |
| Insulator A | LCP | ————— | UL94V-0 |
| Insulator B | Polyamide | | UL94HB |
| Common terminal | Beryllium copper | Partially gold plated | ————— |
| Antenna terminal | Phosphor bronze | Partially gold plated | ————— |

◆High Frequency Characteristics (Typical)

●NORMALLY CLOSED(N.C) ~ (Not mated with the plug)

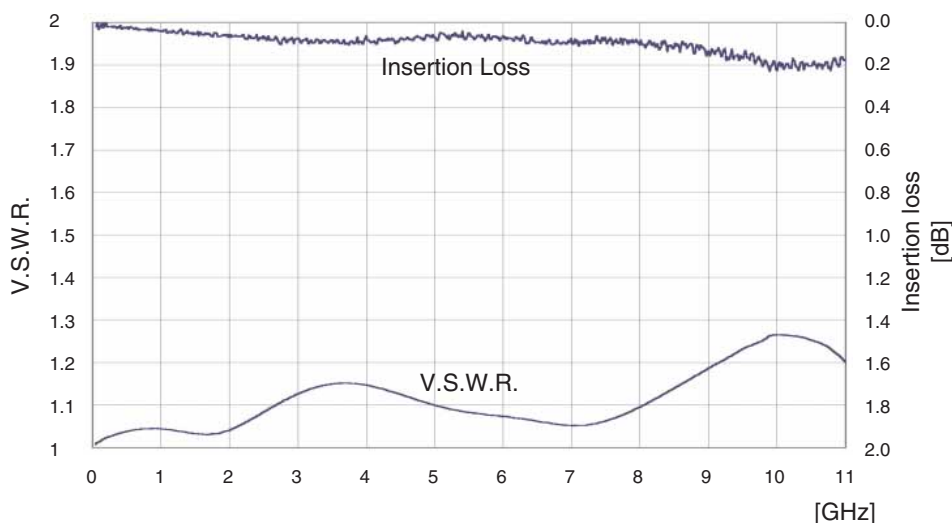

●OPEN(N.O) ~ (Mated with the plug)

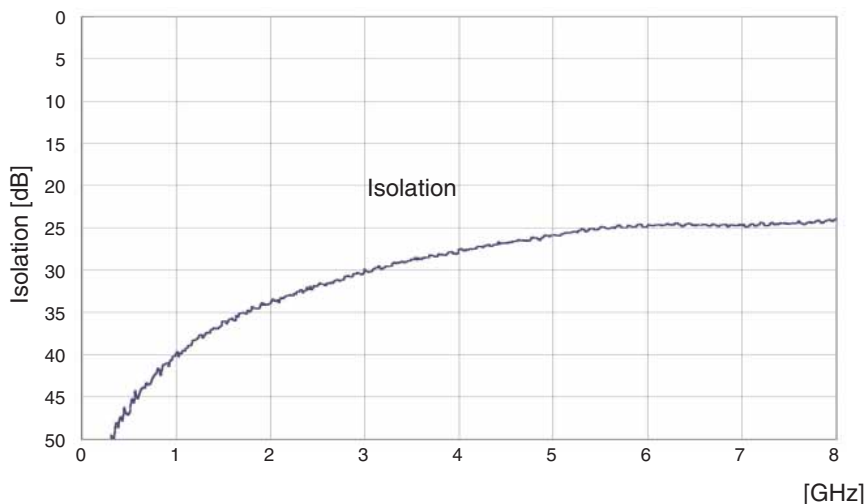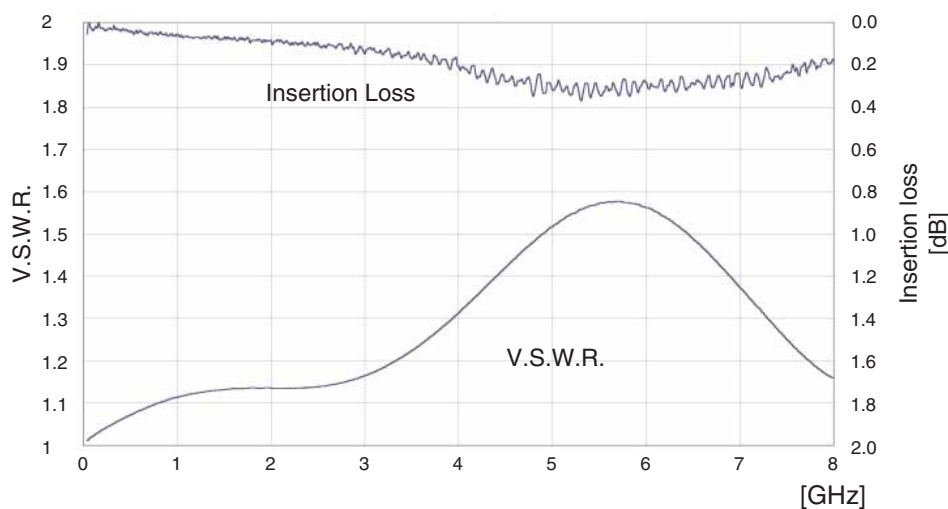


Receptacle




| Part Number | CL No. | Packaging |
|-------------|---------------|--------------------|
| MS-166 | 358-0229-3 | 2,000 pieces/reel |
| MS-166 (01) | 358-0229-3-01 | 10,000 pieces/reel |

Circuit diagram

Not mated with the plug (N.C)




MS-166 Plug




MS-166


Mated with the plug (N.O)



MS-166 Plug




MS-166

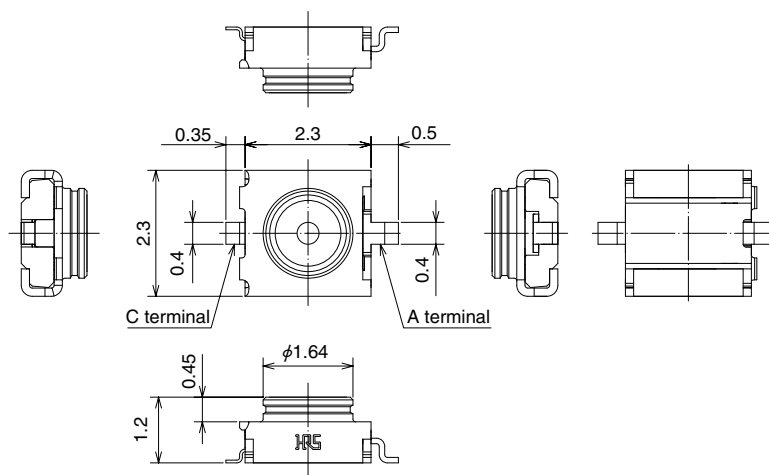

Recommended PCB mounting pattern and metal mask dimensions


PCB mounting pattern




area show the conductive pattern prohibited area.

Metal mask dimensions


0.1 to 0.12mm thick

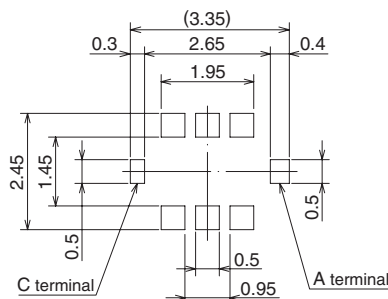

◆Precautions

1. Do not use the washing process.
2. This product is intended to be used for circuit inspection only. Consult us if any other application is considered.
3. Plugs can be roughly classified to two types.
 - For mass production line automatic check (Press down type)
 - For manual check (With retentive lock) : Unable to be used at production line.
4. Do not use hand soldering for mounting of MS-166.
Doing so could result in solder and flux wicking to the contact areas.
5. When using a heat gun, hot plate, or similar methods, limit the temperature to 260°C applied for 10 seconds max.
6. Cross-hatched area shown on the PCB mounting pattern must be free of any conductive traces. Placing conductive traces in this area may affect performance and will void product warranties. When the bottom surface of the product (i.e., the  shaded area of the specified land dimensions diagram on the previous page) has been processed with a substrate copper trace and resist processing, Hirose Electric will not be able to warrant the product.
7. Please refrain from using the product in environments specifically affected by excessive vibration, shock, dust, high humidity, gases, very high temperatures and very low temperatures such as outdoor equipment. It might cause degradation or destruction of the product. Even if it endures during a short time, long time quarification is not quaranteed.
8. Exercise caution as not to allow any debris to enter the board mounted MS-166 when cutting PCB.

◆ Recommended Temperature profile

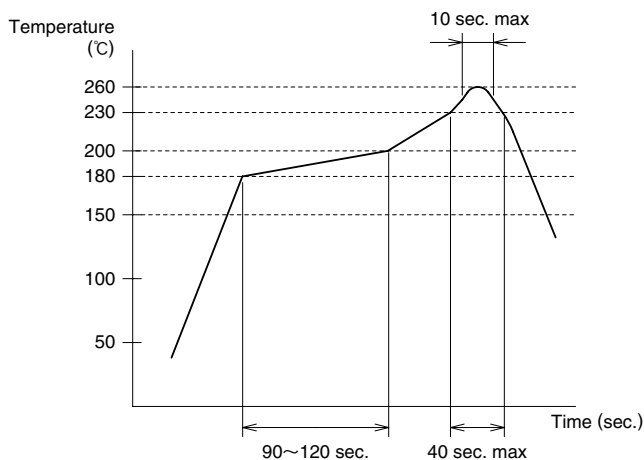


● Typical Lead-free Solder Paste

| | | |
|---|-----------------------|-----------------------|
| ① | Maximum temperature | : 260°C |
| ② | Peak temperature time | : 10 sec. max. |
| ③ | 230°C min. | : 40 sec. max. |
| ④ | 180°C to 200°C | : 90 to 120 sec. max. |


Metal mask thickness: 0.1 to 0.12mm

Reflow cycles: 2 cycles

◆ Packaging Specifications

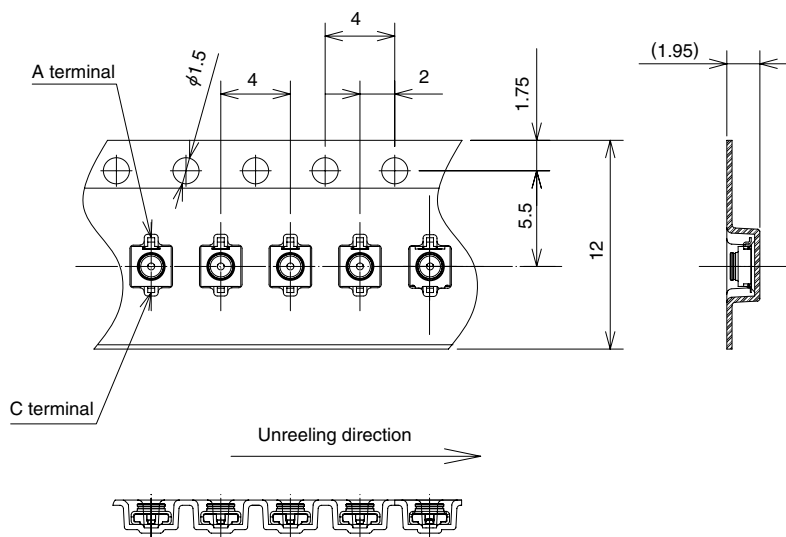



● Reel dimensions

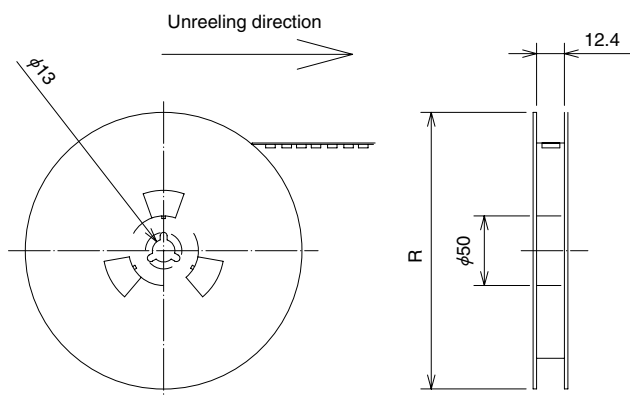

| Part Number | Reel diameter | Packaging |
|-------------|---------------|--------------------|
| MS-166 | 180 mm | 2,000 pieces/reel |
| MS-166 (01) | 380 mm | 10,000 pieces/reel |

■ SMA Conversion Adapters



● Press down, with flange

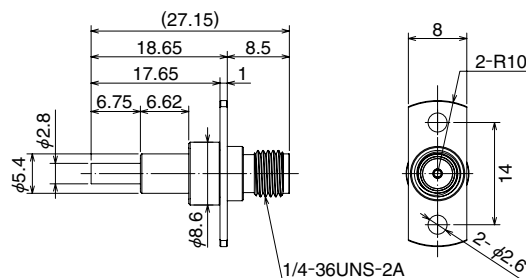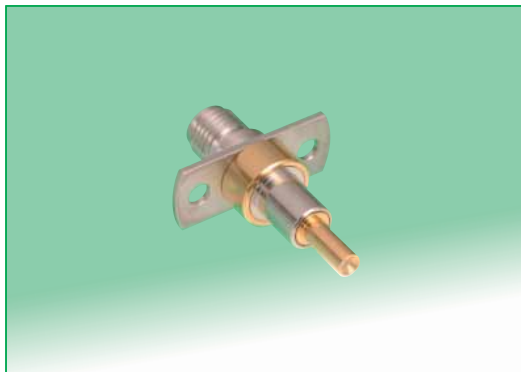

| Part Number | CL No. | Durability |
|---------------|------------|--------------|
| MS-166-HRMJ-1 | 358-0239-7 | 10,000 Times |

- Mates perpendicularly with the MS-166 and should be used with a load of 5.5 to 10 N applied.
- The service life has a plug connector single item guaranty and not the guaranty associated with the same receptacle.


● Floating

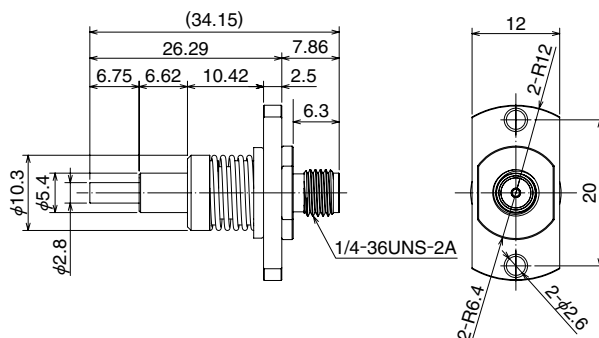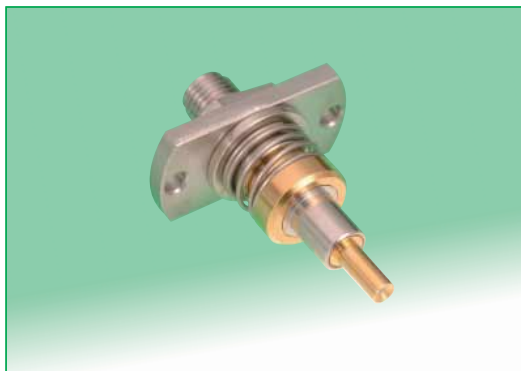

| Part Number | CL No. | Durability |
|----------------|------------|--------------|
| MS-166-HRMJ-F1 | 358-0230-2 | 10,000 Times |

- Mates perpendicularly with the MS-166 and should be used in specified the spring stroke range of this product.
- The service life has a plug connector single item guaranty and not the guaranty associated with the same receptacle.

● Simplified lock, straight

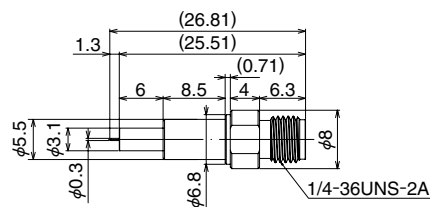

| Part Number | CL No. | Durability |
|----------------|------------|------------|
| MS-166-HRMJ-H1 | 358-0241-9 | 500 Times |

- Equipped with an easy lock mechanism that can maintain mating with the MS-166, but should be used while maintaining a condition of mating perpendicularly.
- The service life has a plug connector single item guaranty and not the guaranty associated with the same receptacle.