

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Apem Inc.](#)
[U2260](#)


For any questions, you can email us directly:
sales@integrated-circuit.com

APEM

K range

Power rocker switches and indicators

- Wide range
- Laser etched symbols
- Illuminated or non-illuminated
- Optionally sealed to IP68



**Unique
rocker design**

K range

Power rocker switches and indicators

The K range at a glance

A range of mix and match products



KR rocker switches

Attractive rugged rocker switches with more than 3.000.000 possible combinations. Custom laser etching.

Page 3



KL locking rocker switches

Available with 2 or 3 positions, with one locked position. Patented intuitive ergonomics.

Page 12



KI indicators

A complete indicator series with a wide choice of colours and a large number of LEDs. Long life expectancy.

Page 21



KG rocker switches

With a raised protection bezel preventing inadvertent actuation of the rocker.

Page 26

Accessories - Page 34



Hole plug

For future extensions.



Connector

For separate wiring.



Mounting panel units

To limit the number of cut-outs.




Removing tool

KR series

Power rocker switches

Distinctive features

Attractive rugged rocker switch

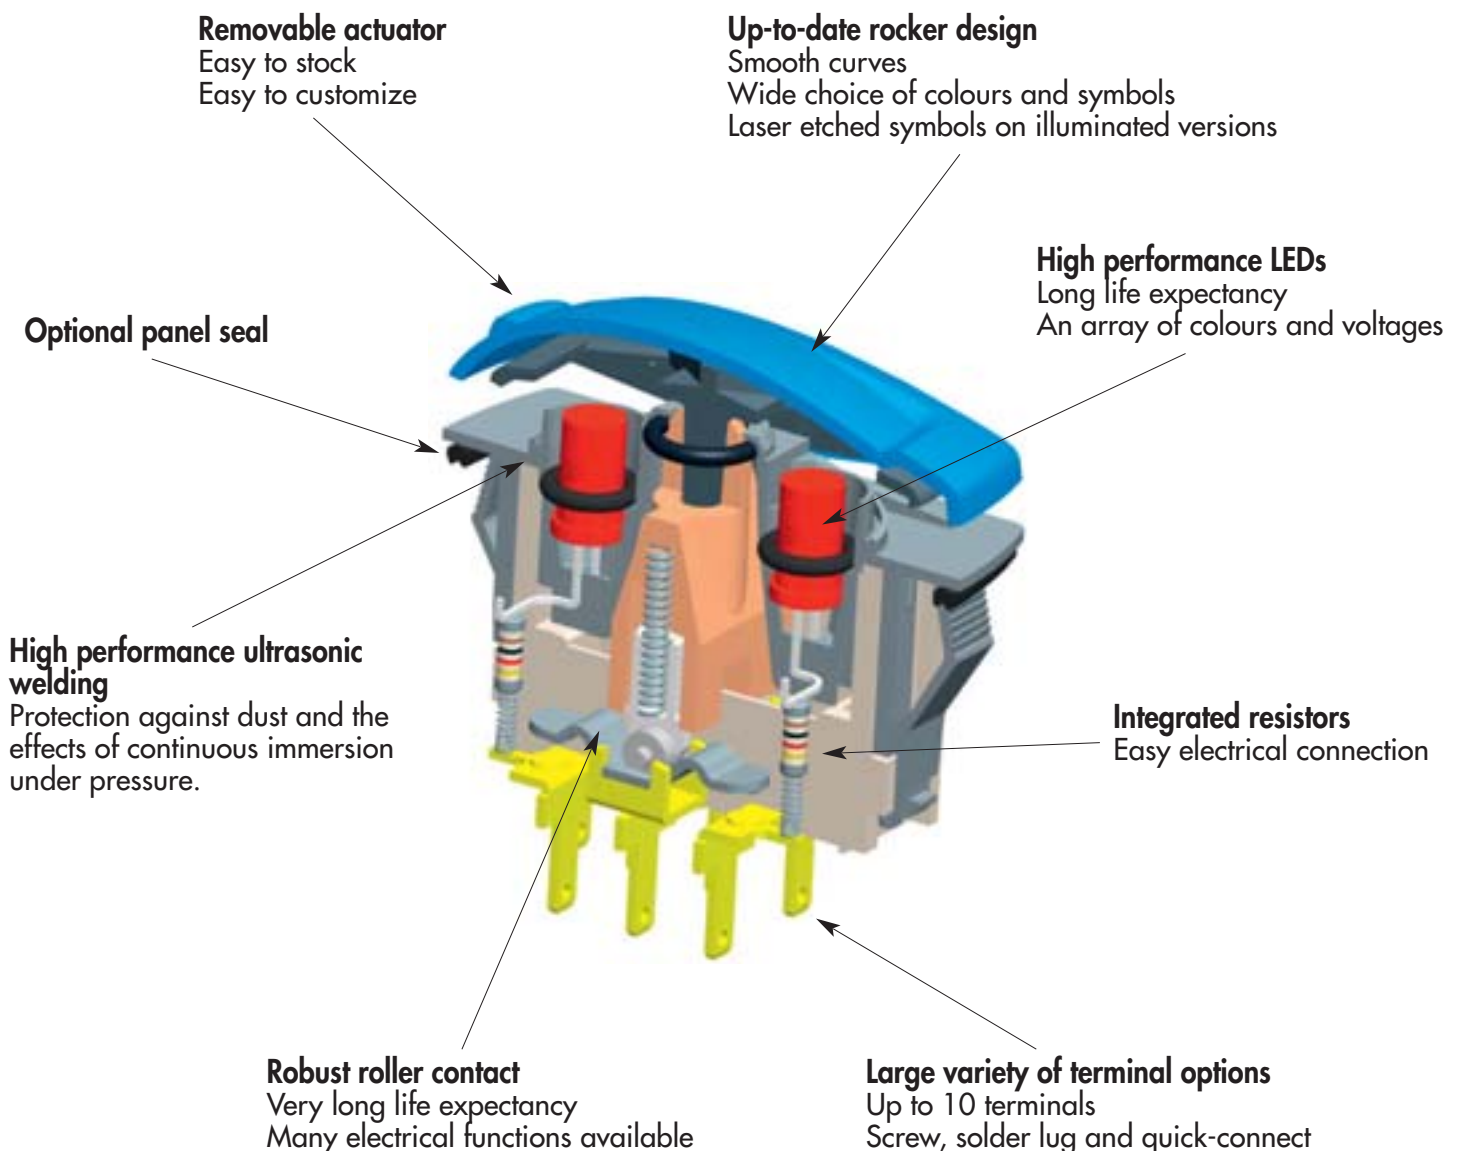

KR series

Power rocker switches

Specifications



- Unique rocker design
- Wide choice of colours
- Laser etched symbols
- Illuminated or non-illuminated
- Optionally sealed to IP68

ELECTRICAL SPECIFICATIONS

- Current/voltage rating with resistive load :
 - Silver contacts (A) : 5A 24VDC, 100.000 cycles
10A 24VDC, 10.000 cycles (terminals 6.35 x 0.8 only)
 - Gold plated contacts (D) : 20mA 12V, 150.000 cycles
- Initial contact resistance : 10 mΩ max.
- Insulation resistance : 1.000 MΩ min. at 500VDC
- Dielectric strength : 2.000 Vrms 50 Hz min. between terminals
- Mechanical life : 150.000 cycles min.

ENVIRONMENTAL SPECIFICATIONS

- Degree of protection of sealed versions : frontal sealing to IP68 according to IEC 60529 (submersion under 1 meter of water for more than 30 minutes)
- Salt spray resistance : 96 hours according to IEC 512-6, test 11f
- Vibration resistance : 10-500 Hz / 10 g per IEC 60068-2-6
- Operating temperature : -40°C to +85°C


MATERIALS

- Case : PA 6-6
- Actuator : ABS
- Bezel : PA 6-6
- Terminals : brass, silver plated
- Contacts : silver (A)
or silver, gold plated (D)
- Contact roller : brass, nickel plated

SEALING

Sealing is optional.
 To order a sealed product, complete the appropriate box of ordering format on the following pages.

DIMENSIONS

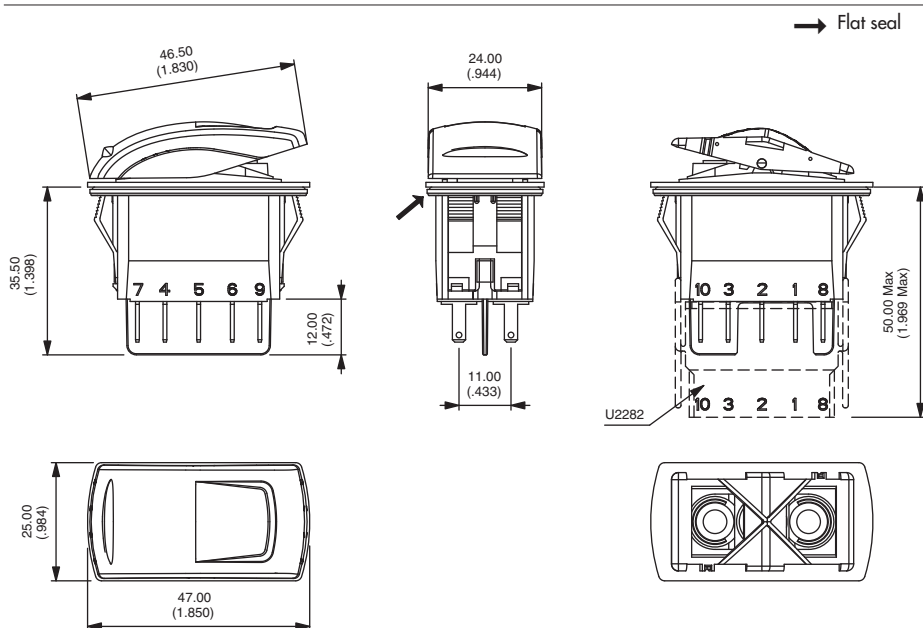

Dimensions : First dimensions are in mm while inches are shown as bracketed numbers.

Tolerance : The general tolerance for dimensions in this brochure is $\pm 0,3$ (.012). Overall dimension tolerance is $\pm 0,5$ (.020).



Packaging unit : 40 pieces

KR series

Power rocker switches

Selection guide

HOW TO ORDER

- To order a complete product, fill in all the boxes of the following order guide.
- To order case only (without actuator), finish your order number with the LED wiring code.
- To order actuator only (without case), begin the order number with code KRR, then follow the order format from "actuator type" until the end of the options.

CASE + LEDS

KR						Side A	Side B	
SERIES	Electrical functions			Contacts	Sealing	LEDS		Wiring
Poles	1 ON - OFF	4 ON ON ON	4-1R ON ON MOM	A Silver	X No	X None	A LED 6V red B LED 6V green C LED 6V yellow M LED 6V blue R LED 6V white D LED 12V red E LED 12V green F LED 12V yellow N LED 12V blue S LED 12V white J LED 24V red K LED 24V green L LED 24V yellow P LED 24V blue T LED 24V white	See diagrams page 9.
3 Single pole 4 Double pole	5 MOM - ON	6 ON - ON	7 MOM OFF MOM	D Gold plated	K Yes			
	8 ON OFF MOM	9 ON OFF ON		Terminals				
				Terminals (continued)				
				Screw 0 6 terminals with barrier Solder lug/quick-connect 2 6 terminals with barrier 4 6 terminals w/o barrier A 10 term. with barrier B 10 term. w/o barrier C 10 terminals for use with connector U2292 Quick-connect 6,35x0,8 3 6 terminals with barrier	Quick-connect 6,35x0,8 5 6 terminals w/o barrier D 10 term. with barrier E 10 term. w/o barrier F 10 term. for use with connector U2292 Quick-connect 2,8x0,8 G 10 term. with barrier H 10 term. w/o barrier J 10 terminals for use with connector U2282			

ACTUATOR

Type	Colour
1 For non-illuminated application 2 For illuminated application	1 Blue 1/4 Dark blue 2 Black 3 Green 4 Grey 5 Yellow 6 Red 7 Ivory 9 Orange A Aluminium bright

ACTUATOR MARKING

	Area A	Area M	Area B
Orientation	Symbols		
N O S E			
	Symbols : see page 31. Accessories : see page 34.		




NOTICE : please note that not all combinations of above numbers are available. Refer to the following pages for further information.

KR series

Power rocker switches

Case

• To order case only (without rocker), finish your order number with the LED wiring code.



	Single pole	Double pole	2-3	1-2			
	KR31 KR35 KR36 KR37 KR38 KR39	KR41 KR44* KR44-1R* KR45 KR46 KR47 KR48 KR49	ON - OFF ON ON ON ON ON MOM MOM - ON ON - ON MOM OFF MOM ON OFF MOM ON OFF ON	5-6 4-5			10 terminal version
	* Function 4 : single pole in double pole case						

ELECTRICAL FUNCTIONS AND CONNECTIONS

In the tables below, terminal connections as viewed from bottom of switch.
 Only the contact area is represented.
 For single pole models, only terminals 1, 2 and 3 are to be considered (not terminals 6, 5, 4).

x = w/o terminal
 o = with terminal
 ▲ = momentary

	Positions		
Function 1 * KR31-KR41			
Function 5 KR35-KR45			
Function 6 KR36-KR46			
Function 7 KR37-KR47			
Function 8 KR38-KR48			
Function 9 KR39-KR49			
Function 4 KR44			
Function 4-1R KR44-1R			

* Function 1 only available for 6 terminal versions.


KR series

Power rocker switches


Case

TERMINALS


CASE + LEADS




Screw





Solder lug / quick-connect

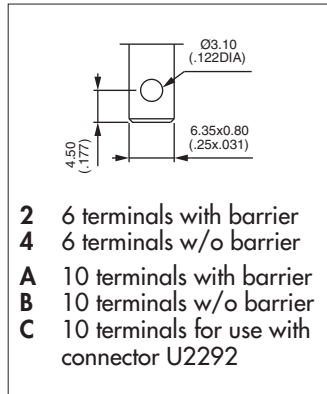

Normalized quick-connect 6,35x0,8

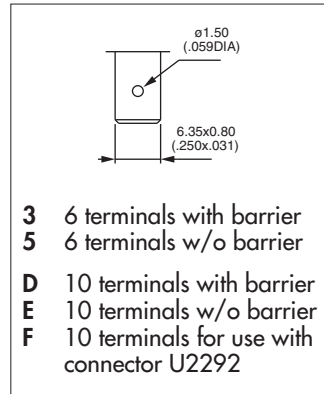

Normalized quick-connect 2,8x0,8

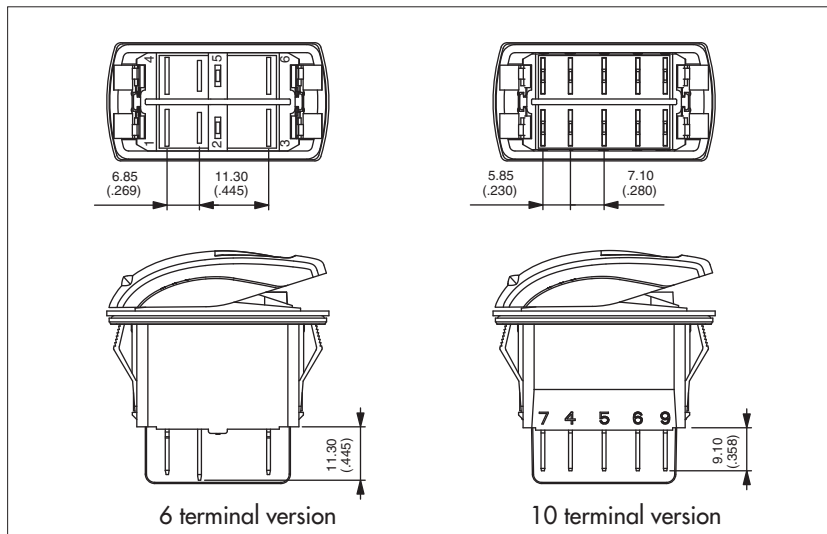


Terminals are marked on the case.

The drawings show the maximum possible number of terminals.

CONTACT MATERIALS

CASE + LEADS




- A** Silver
- D** Silver, gold plated

KR series

Power rocker switches

Case - LEDs


SEALING




- X** No sealing
- K** IP68 (switch assembled on panel)

Ultrasonic welding of frame to case is standard on all versions.
 The ultrasonic welding and the optional panel seal prevent water and dust from introducing into the switch housing.

*The product shall be installed professionally.
 Test conditions available on request.*

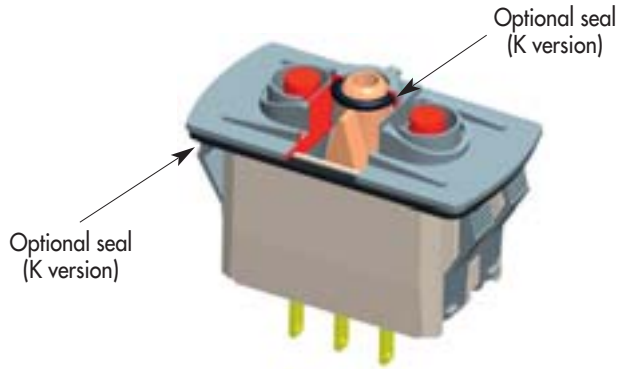

LEDS

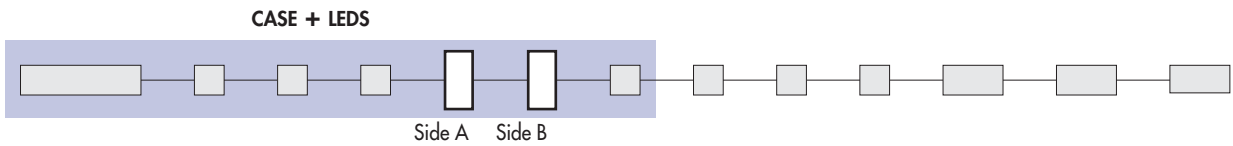


Complete each enlarged box with one of the codes listed below.

- X** Without LED

	Red	Green	Yellow	Blue	White
6VDC	A	B	C	M	R
12VDC	D	E	F	N	S
24VDC	J	K	L	P	T

LED consumption : 20mA @ nominal voltage (25°C)

Other illumination solutions : on request.

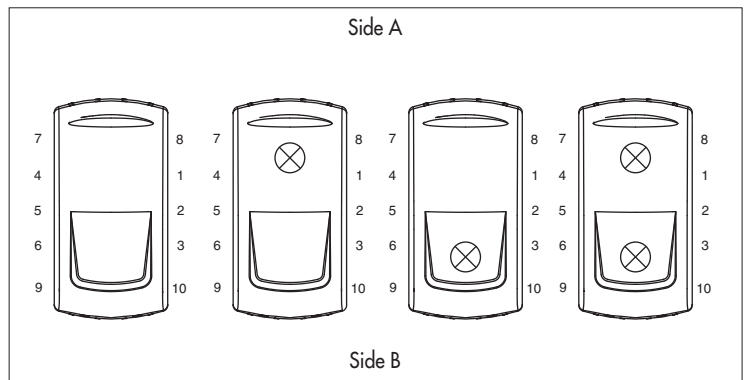

KR series


Power rocker switches

Case - LEDs

WIRING




The LED wiring diagram is shown on the case.

CASE + LEDS






• For 6 terminal versions

LED connected to the load

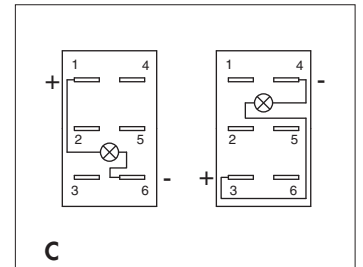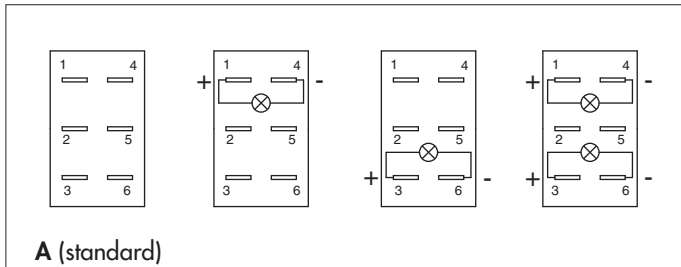


Note : If not available, terminals are added to connect the LED.

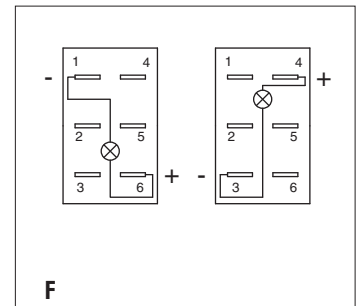


• For 10 terminal versions

Independent LED or integrated functions

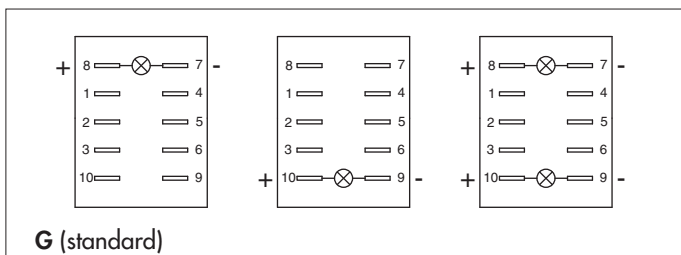


To have independent LEDs.

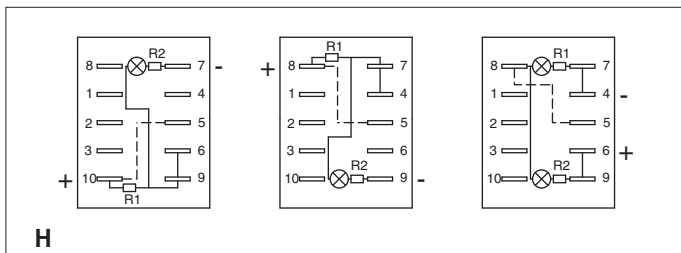

Available in Single Pole only, with H and J quick-connect terminals.

To obtain 2 symbol illumination levels (night illumination when OFF and higher illumination when ON).

Dotted line = external wiring, continuous line = internal wiring

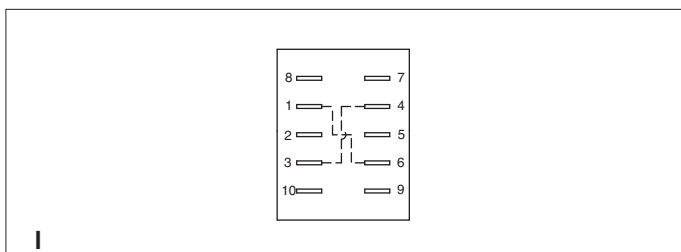

To have a polarity inversion (typical application : fan motor).

Dotted line = internal wiring, continuous line = internal wiring

Power supply between 2 and 5 - Load between 1 and 4 or 3 and 6.

Please contact us for other wiring solutions.


KR series

Power rocker switches

Actuator - Marking

To order actuator only (without case), begin the order number with code KRR, then follow the order format from "actuator type" until the end of the options.


ACTUATOR TYPE



- 1 For non-illuminated application
- 2 For illuminated application

Other rocker design : on request.

ACTUATOR COLOUR



Code	Colour
1	Blue
1/4	Dark blue
2	Black
3	Green

Code	Colour
4	Grey
5	Yellow
6	Red
7	Ivory

Code	Colour
9	Orange
A	Aluminium bright



Note : colour 7 not available on illuminated versions.

A **soft-touch varnish** can be added. Consult us.



MARKING ORIENTATION

If no marking required, leave box blank.

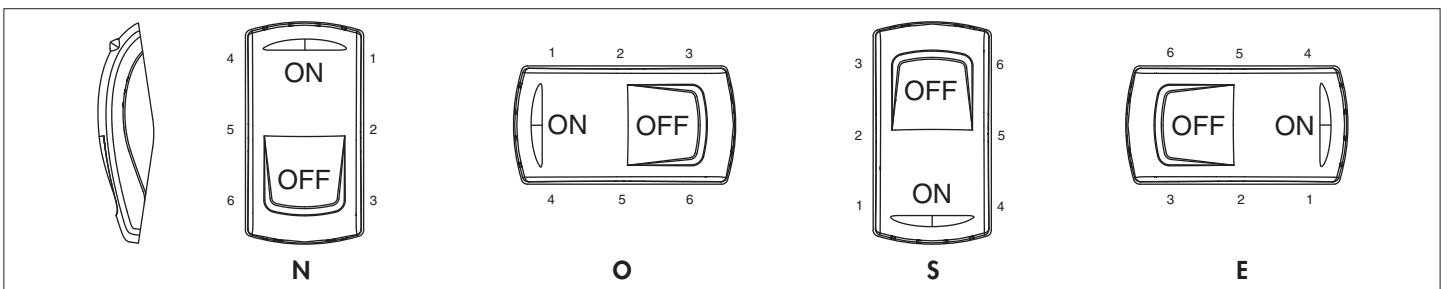


Other orientations : on request

KR series

Power rocker switches

Marking - Mounting

SYMBOLS



Available symbols : see page 31.

Marking colour



White marking for illuminated rockers (laser etching) and non-illuminated black rockers (pad printing). Black marking for non-illuminated colour rockers (pad printing). Other : on request.

Laser etching resistance

- Water and petrol resistant according to EN61058-1
- Tear resistant (cross-cut test) according to NF ISO 2409 : class 0
- UV resistant according to ISO 4892-2


Marking area

For illuminated versions. The symbol will be included in the hatched area.
 Marking in M are : on request.


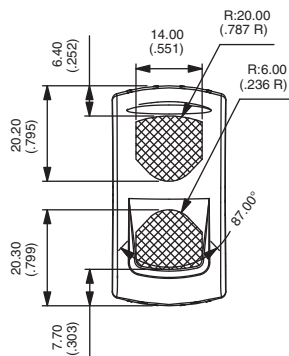



SWITCH PANEL CUT-OUT

Panel thickness : 0,8 mm to 4,6 mm
 Recommended panel thickness :
 between 2 mm and 3,5 mm



MATRIX MOUNTING

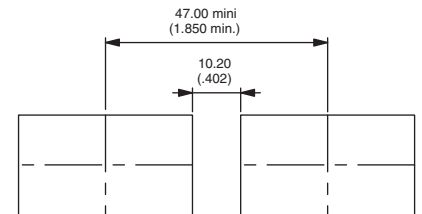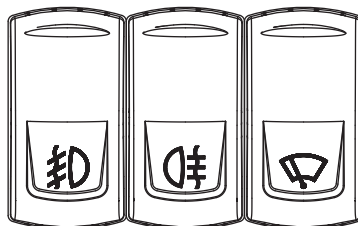

KL series

Locking rocker switches

Distinctive features

Unlocking actuator


Each KL rocker switch includes an unlocking actuator.

This actuator must be pressed to activate the protected function of the rocker. Moreover, two frames protect the unlocking actuator from untimely activation.


This intuitive and secured ergonomics is patented by APEM.



2 position versions (electrical functions 1, 5 and 6)

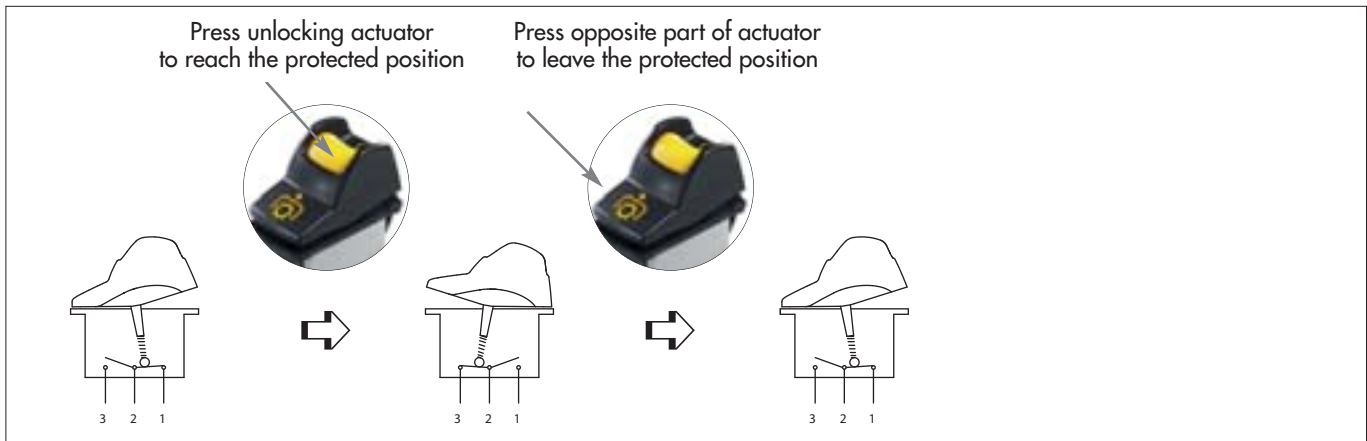

3 position versions (electrical functions 7, 8, 9 4, 4-1R)

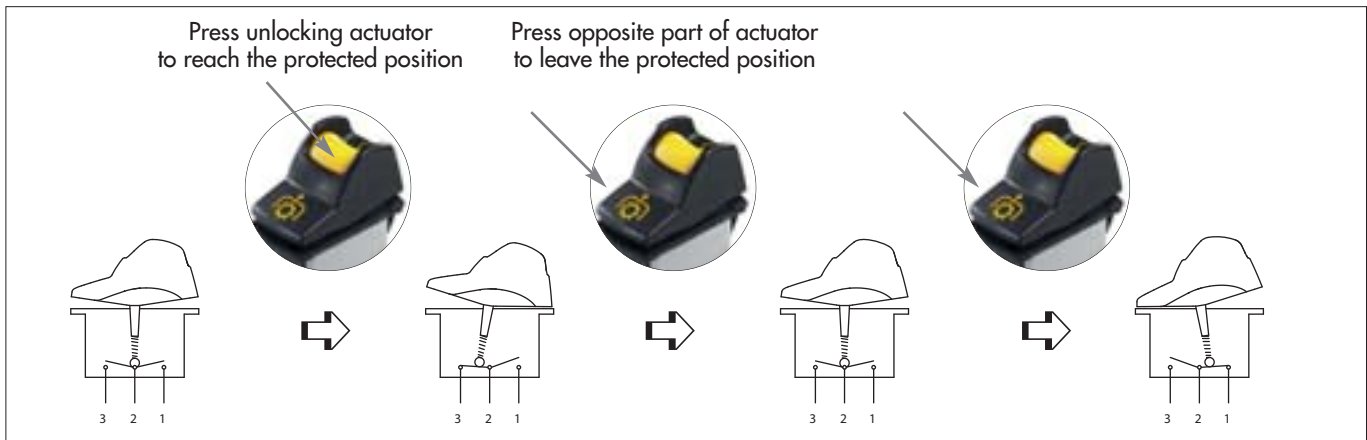

KL series

Locking rocker switches

Specifications



- One protected position
- Patented intuitive ergonomics
- Wide choice of colours
- Laser etched symbols
- Illuminated or non-illuminated

ELECTRICAL SPECIFICATIONS

- Current/voltage rating with resistive load :
 - Silver contacts (A) : 5A 24VDC, 100.000 cycles
10A 24VDC, 10.000 cycles (terminals 6.35 x 0.8 only)
 - Gold plated contacts (D) : 20mA 12V, 150.000 cycles
- Initial contact resistance : 10 mΩ max.
- Insulation resistance : 1.000 MΩ min. at 500VDC
- Dielectric strength : 2.000 Vrms 50 Hz min. between terminals
- Mechanical life : 150.000 cycles min.

MATERIALS

- Case : PA 6-6
- Actuator and unlocking actuator : ABS
- Bezel : PA 6-6
- Terminals : brass, silver plated
- Contacts : silver (A)
or silver, gold plated (D)
- Contact roller : brass, nickel plated


ENVIRONMENTAL SPECIFICATIONS

- Degree of protection of sealed versions : frontal sealing to IP68 according to IEC 60529 (submersion under 1 meter of water for more than 30 minutes)
- Salt spray resistance : 96 hours according to IEC 512-6, test 11f
- Operating temperature : -40°C to +85°C

SEALING

Sealing is optional.
 To order a sealed product, complete the appropriate box of ordering format on the following pages.

DIMENSIONS

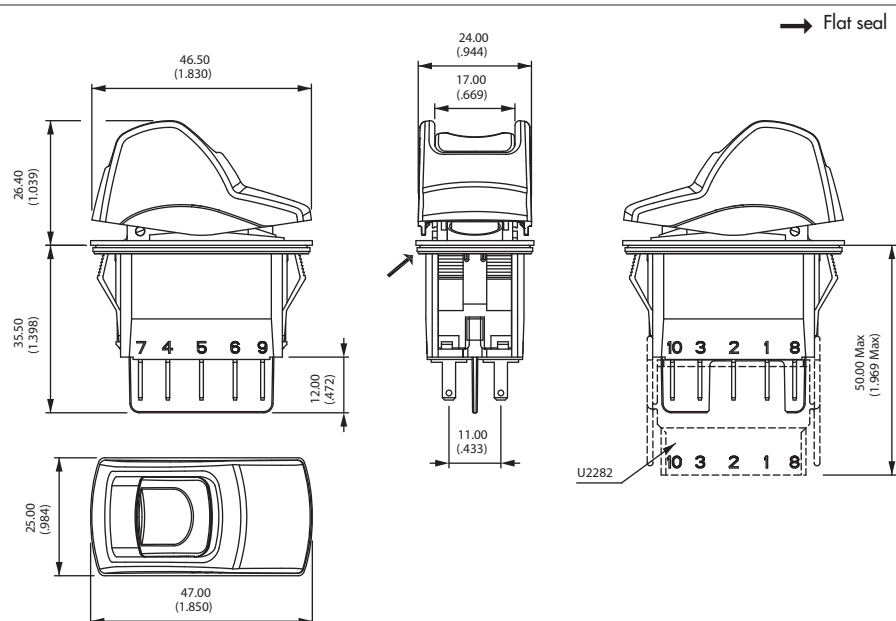

Dimensions : First dimensions are in mm while inches are shown as bracketed numbers.

Tolerance : The general tolerance for dimensions in this brochure is $\pm 0,3$ (.012). Overall dimension tolerance is $\pm 0,5$ (.020).



Packaging unit : 40 pieces

KL series

Locking rocker switches

Selection guide

• To order a complete product, fill in all the boxes of the following order guide.

CASE + LEADS

KL							Side B																																																																									
SERIES	Electrical functions			Contacts	Sealing	LEDS		Wiring																																																																								
Poles	<table border="1"> <tr><td>1</td><td>ON</td><td>-</td><td>OFF</td></tr> <tr><td>4</td><td>ON</td><td>ON</td><td>ON</td></tr> <tr><td>4-1R</td><td>ON</td><td>ON</td><td>MOM</td></tr> <tr><td>5</td><td>MOM</td><td>-</td><td>ON</td></tr> <tr><td>6</td><td>ON</td><td>-</td><td>ON</td></tr> <tr><td>7</td><td>MOM</td><td>OFF</td><td>MOM</td></tr> <tr><td>8</td><td>ON</td><td>OFF</td><td>MOM</td></tr> <tr><td>9</td><td>ON</td><td>OFF</td><td>ON</td></tr> </table>			1	ON	-	OFF	4	ON	ON	ON	4-1R	ON	ON	MOM	5	MOM	-	ON	6	ON	-	ON	7	MOM	OFF	MOM	8	ON	OFF	MOM	9	ON	OFF	ON	<table border="1"> <tr><td>A</td><td>Silver</td></tr> <tr><td>D</td><td>Gold plated</td></tr> </table>	A	Silver	D	Gold plated	<table border="1"> <tr><td>X</td><td>No</td></tr> <tr><td>K</td><td>Yes</td></tr> </table>	X	No	K	Yes	<table border="1"> <tr><td>X</td><td>None</td></tr> <tr><td>A</td><td>LED 6V red</td></tr> <tr><td>B</td><td>LED 6V green</td></tr> <tr><td>C</td><td>LED 6V yellow</td></tr> <tr><td>M</td><td>LED 6V blue</td></tr> <tr><td>R</td><td>LED 6V white</td></tr> <tr><td>D</td><td>LED 12V red</td></tr> <tr><td>E</td><td>LED 12V green</td></tr> <tr><td>F</td><td>LED 12V yellow</td></tr> <tr><td>N</td><td>LED 12V blue</td></tr> <tr><td>S</td><td>LED 12V white</td></tr> <tr><td>J</td><td>LED 24V red</td></tr> <tr><td>K</td><td>LED 24V green</td></tr> <tr><td>L</td><td>LED 24V yellow</td></tr> <tr><td>P</td><td>LED 24V blue</td></tr> <tr><td>T</td><td>LED 24V white</td></tr> </table>		X	None	A	LED 6V red	B	LED 6V green	C	LED 6V yellow	M	LED 6V blue	R	LED 6V white	D	LED 12V red	E	LED 12V green	F	LED 12V yellow	N	LED 12V blue	S	LED 12V white	J	LED 24V red	K	LED 24V green	L	LED 24V yellow	P	LED 24V blue	T	LED 24V white	See diagrams page 18.
1	ON	-	OFF																																																																													
4	ON	ON	ON																																																																													
4-1R	ON	ON	MOM																																																																													
5	MOM	-	ON																																																																													
6	ON	-	ON																																																																													
7	MOM	OFF	MOM																																																																													
8	ON	OFF	MOM																																																																													
9	ON	OFF	ON																																																																													
A	Silver																																																																															
D	Gold plated																																																																															
X	No																																																																															
K	Yes																																																																															
X	None																																																																															
A	LED 6V red																																																																															
B	LED 6V green																																																																															
C	LED 6V yellow																																																																															
M	LED 6V blue																																																																															
R	LED 6V white																																																																															
D	LED 12V red																																																																															
E	LED 12V green																																																																															
F	LED 12V yellow																																																																															
N	LED 12V blue																																																																															
S	LED 12V white																																																																															
J	LED 24V red																																																																															
K	LED 24V green																																																																															
L	LED 24V yellow																																																																															
P	LED 24V blue																																																																															
T	LED 24V white																																																																															
	Terminals			Terminals (continued)																																																																												
	<table border="1"> <tr><td>Screw</td></tr> <tr><td>0</td><td>6 terminals with barrier</td></tr> <tr><td>Solder lug/quick-connect</td></tr> <tr><td>2</td><td>6 terminals with barrier</td></tr> <tr><td>4</td><td>6 terminals w/o barrier</td></tr> <tr><td>A</td><td>10 term. with barrier</td></tr> <tr><td>B</td><td>10 term. w/o barrier</td></tr> <tr><td>C</td><td>10 terminals for use with connector U2292</td></tr> <tr><td>Quick-connect 6,35x0,8</td></tr> <tr><td>3</td><td>6 terminals with barrier</td></tr> </table>			Screw	0	6 terminals with barrier	Solder lug/quick-connect	2	6 terminals with barrier	4	6 terminals w/o barrier	A	10 term. with barrier	B	10 term. w/o barrier	C	10 terminals for use with connector U2292	Quick-connect 6,35x0,8	3	6 terminals with barrier	<table border="1"> <tr><td>Quick-connect 6,35x0,8</td></tr> <tr><td>5</td><td>6 terminals w/o barrier</td></tr> <tr><td>D</td><td>10 term. with barrier</td></tr> <tr><td>E</td><td>10 term. w/o barrier</td></tr> <tr><td>F</td><td>10 term. for use with connector U2292</td></tr> <tr><td>Quick-connect 2,8x0,8</td></tr> <tr><td>G</td><td>10 term. with barrier</td></tr> <tr><td>H</td><td>10 term. w/o barrier</td></tr> <tr><td>J</td><td>10 terminals for use with connector U2282</td></tr> </table>		Quick-connect 6,35x0,8	5	6 terminals w/o barrier	D	10 term. with barrier	E	10 term. w/o barrier	F	10 term. for use with connector U2292	Quick-connect 2,8x0,8	G	10 term. with barrier	H	10 term. w/o barrier	J	10 terminals for use with connector U2282																																										
Screw																																																																																
0	6 terminals with barrier																																																																															
Solder lug/quick-connect																																																																																
2	6 terminals with barrier																																																																															
4	6 terminals w/o barrier																																																																															
A	10 term. with barrier																																																																															
B	10 term. w/o barrier																																																																															
C	10 terminals for use with connector U2292																																																																															
Quick-connect 6,35x0,8																																																																																
3	6 terminals with barrier																																																																															
Quick-connect 6,35x0,8																																																																																
5	6 terminals w/o barrier																																																																															
D	10 term. with barrier																																																																															
E	10 term. w/o barrier																																																																															
F	10 term. for use with connector U2292																																																																															
Quick-connect 2,8x0,8																																																																																
G	10 term. with barrier																																																																															
H	10 term. w/o barrier																																																																															
J	10 terminals for use with connector U2282																																																																															

ACTUATOR

Type	Rocker colour	Unlocking actuator colour																																								
<table border="1"> <tr><td>1</td><td>For non-illum. application</td></tr> <tr><td>2</td><td>For illuminated application</td></tr> </table>	1	For non-illum. application	2	For illuminated application	<table border="1"> <tr><td>1</td><td>Blue</td></tr> <tr><td>1/4</td><td>Dark blue</td></tr> <tr><td>2</td><td>Black</td></tr> <tr><td>3</td><td>Green</td></tr> <tr><td>4</td><td>Grey</td></tr> <tr><td>5</td><td>Yellow</td></tr> <tr><td>6</td><td>Red</td></tr> <tr><td>7</td><td>Ivory</td></tr> <tr><td>9</td><td>Orange</td></tr> </table>	1	Blue	1/4	Dark blue	2	Black	3	Green	4	Grey	5	Yellow	6	Red	7	Ivory	9	Orange	<table border="1"> <tr><td>1</td><td>Blue</td></tr> <tr><td>1/4</td><td>Dark blue</td></tr> <tr><td>2</td><td>Black</td></tr> <tr><td>3</td><td>Green</td></tr> <tr><td>4</td><td>Grey</td></tr> <tr><td>5</td><td>Yellow</td></tr> <tr><td>6</td><td>Red</td></tr> <tr><td>7</td><td>Ivory</td></tr> <tr><td>9</td><td>Orange</td></tr> </table>	1	Blue	1/4	Dark blue	2	Black	3	Green	4	Grey	5	Yellow	6	Red	7	Ivory	9	Orange
1	For non-illum. application																																									
2	For illuminated application																																									
1	Blue																																									
1/4	Dark blue																																									
2	Black																																									
3	Green																																									
4	Grey																																									
5	Yellow																																									
6	Red																																									
7	Ivory																																									
9	Orange																																									
1	Blue																																									
1/4	Dark blue																																									
2	Black																																									
3	Green																																									
4	Grey																																									
5	Yellow																																									
6	Red																																									
7	Ivory																																									
9	Orange																																									

ACTUATOR MARKING

	Area A	Area B																						
Orientation	Symbols	Marking colour																						
		<table border="1"> <tr><td colspan="2">Illuminated models</td></tr> <tr><td>Blank</td><td>White</td></tr> <tr><td colspan="2">Non-illuminated</td></tr> <tr><td>1</td><td>Blue</td></tr> <tr><td>2</td><td>Black</td></tr> <tr><td>3</td><td>Green</td></tr> <tr><td>4</td><td>Grey</td></tr> <tr><td>5</td><td>Yellow</td></tr> <tr><td>6</td><td>Red</td></tr> <tr><td>7</td><td>White</td></tr> <tr><td>9</td><td>Orange</td></tr> </table>	Illuminated models		Blank	White	Non-illuminated		1	Blue	2	Black	3	Green	4	Grey	5	Yellow	6	Red	7	White	9	Orange
Illuminated models																								
Blank	White																							
Non-illuminated																								
1	Blue																							
2	Black																							
3	Green																							
4	Grey																							
5	Yellow																							
6	Red																							
7	White																							
9	Orange																							
<p>Symbols : see page 31. Accessories : see page 34.</p>																								





NOTICE : please note that not all combinations of above numbers are available. Refer to the following pages for further information.

KL series

Locking rocker switches

Case






Single pole	Double pole	2-3	1-2
KL31	KL41	ON -	OFF
	KL44*	ON ON	ON
	KL44-1R*	ON ON	MOM
KL35	KL45	MOM -	ON
KL36	KL46	ON -	ON
KL37	KL47	MOM OFF	MOM
KL38	KL48	ON OFF	MOM
KL39	KL49	ON OFF	ON


* Function 4 : single pole in double pole case

Bottom view

10 terminal version

































6 terminal version



ELECTRICAL FUNCTIONS AND CONNECTIONS

In the tables below, terminal connections as viewed from bottom of switch. Only the contact area is represented. For single pole models, only terminals 1, 2 and 3 are to be considered (not 6, 5, 4).

x = w/o terminal
 o = with terminal
 ▲ = momentary

	2 positions		3 positions		
					
Function 1 * KL31-KL41					
Function 5 KL35 - KL45					
Function 6 KL36-KL46					
Function 4 KL44					
Function 4-1R KL44-1R					

*** Function 1**

- Only available for 6 terminal versions.
- Illuminated versions only available with "A" wiring.


KL series

Locking rocker switches


Case

TERMINALS


CASE + LEDS




Screw





Solder lug / quick-connect

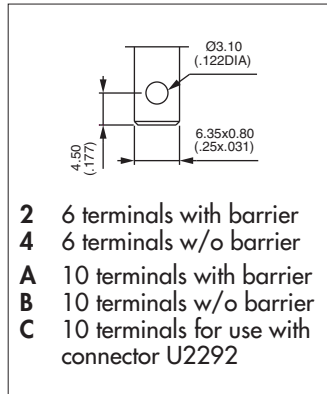

Normalized quick-connect 6,35x0,8

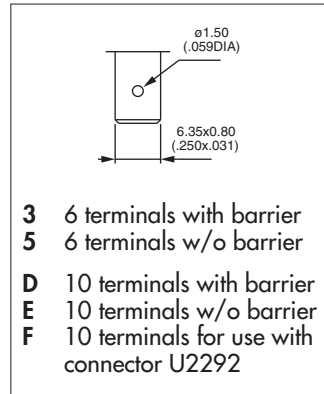

Normalized quick-connect 2,8x0,8

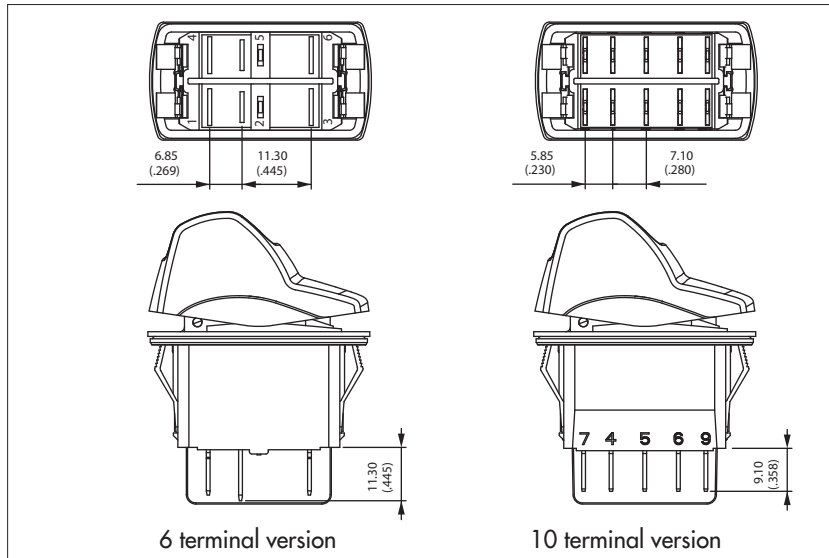


Terminals are marked on the case.

The drawings show the maximum possible number of terminals.

CONTACT MATERIALS

CASE + LEDS




- A** Silver
- D** Silver, gold plated

KL series

Locking rocker switches

Case - LEDs


SEALING




- X** No sealing
- K** IP68 (switch assembled on panel)

Ultrasonic welding of frame to case is standard on all versions.
 The ultrasonic welding and the optional panel seal prevent water and dust from introducing into the switch housing.

*The product shall be installed professionally.
 Test conditions available on request.*

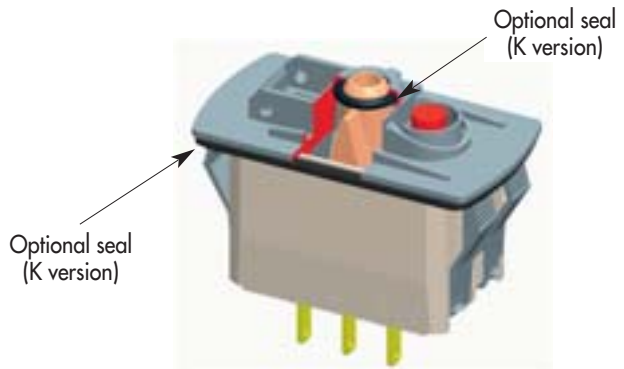

LEDS

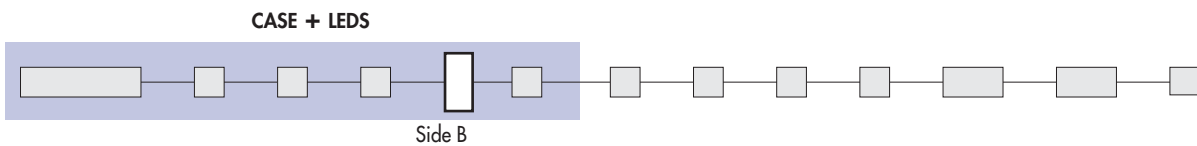


Complete enlarged box with one of the codes listed below.

- X** Without LED

	Red	Green	Yellow	Blue	White
6VDC	A	B	C	M	R
12VDC	D	E	F	N	S
24VDC	J	K	L	P	T

LED consumption : 20mA @ nominal voltage (25°C)

Other illumination solutions : on request.

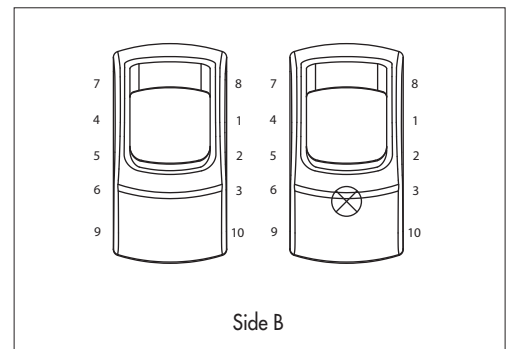

KL series


Locking rocker switches

Case - LED

WIRING






The LED wiring diagram is shown on the case.

CASE + LED



• For 6 terminal versions


LED connected to the load




Note : If not available, terminals are added to connect the LED.

• For 10 terminal versions

Independent LED or integrated functions




To have independent LED.



To obtain 2 symbol illumination levels (night illumination when OFF and higher illumination when ON).
 Dotted line = external wiring, continuous line = internal wiring

Available in Single Pole only, with H and J quick-connect terminals.



To have a polarity inversion (typical application : fan motor).
 Dotted line = internal wiring, continuous line = internal wiring

Power supply between 2 and 5 - Load between 1 and 4 or 3 and 6.
 Available with H and J quick-connect terminals.


Please contact us for other wiring solutions.

KL series

Locking rocker switches


Actuator - Marking

ACTUATOR TYPE



- 1 For non-illuminated application
- 2 For illuminated application

ROCKER COLOUR




Code	Colour
1	Blue
1/4	Dark blue
2	Black

Code	Colour
3	Green
4	Grey
5	Yellow

Code	Colour
6	Red
7	Ivory
9	Orange

Note : colour 7 not available on illuminated versions

UNLOCKING ACTUATOR COLOUR





Code	Colour
1	Blue
1/4	Dark blue
2	Black

Code	Colour
3	Green
4	Grey
5	Yellow

Code	Colour
6	Red
7	Ivory
9	Orange

MARKING ORIENTATION

If no marking required, leave box blank.

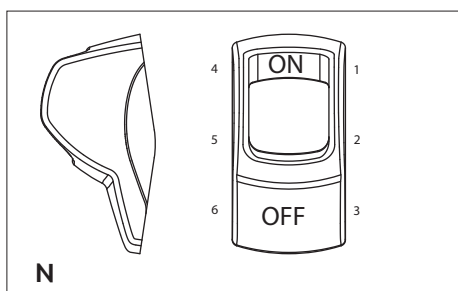


Other orientations : on request

KL series

Locking rocker switches

Marking - Mounting

SYMBOLS




Available symbols : see page 31.


Laser etching resistance

- Water and petrol resistant according to EN61058-1
- Tear resistant (cross-cut test) according to NF ISO 2409 : class 0
- UV resistant according to ISO 4892-2

Marking area - The symbol will be included in the hatched area.


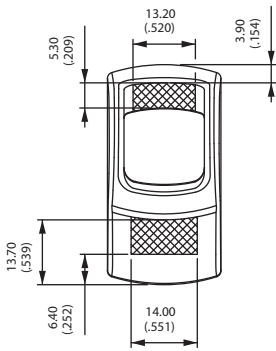


For illuminated versions

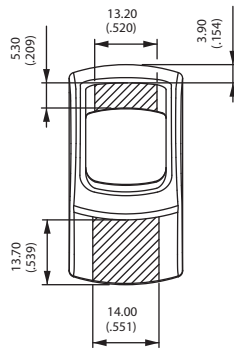


For non-illuminated versions

ACTUATOR MARKING



MARKING COLOUR



Illuminated models (laser etching)

Blank White


Non-illuminated models (pad printing)

1 : Blue - **2** : Black - **3** : Green - **4** : Grey - **5** : Yellow - **6** : Red - **7** : White - **9** : Orange





SWITCH PANEL CUT-OUT

Panel thickness : 0,8 mm to 4,6 mm

Recommended panel thickness :
between 2 mm and 3,5 mm



MATRIX MOUNTING

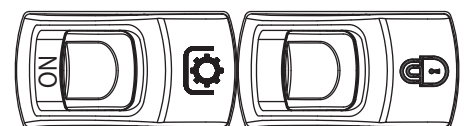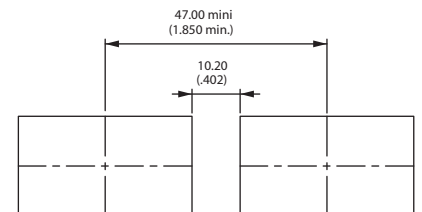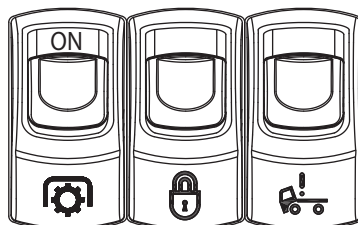

KI series

Led indicators

Specifications



- Wide choice of bezel colours
- Wide choice of LEDs
- Laser etched symbols
- Long life expectancy

ELECTRICAL SPECIFICATIONS

- Operating voltage : 6VDC, 12VDC or 24VDC
- Nominal current : 20mA per LED

ENVIRONMENTAL SPECIFICATIONS

- Degree of protection of sealed versions : frontal sealing to IP68 according to IEC 60529 (submersion under 1 meter of water for more than 30 minutes)
- Salt spray resistance : 96 hours according to IEC 512-6, test 11f
- Operating temperature : -40°C to +85°C

MATERIALS


- Case : ABS
- Bezel : ABS
- Terminals : brass, silver plated

SEALING

Sealing is optional.
 To order a sealed product, complete the appropriate box of ordering format on the following pages.

DIMENSIONS

→ Flat seal

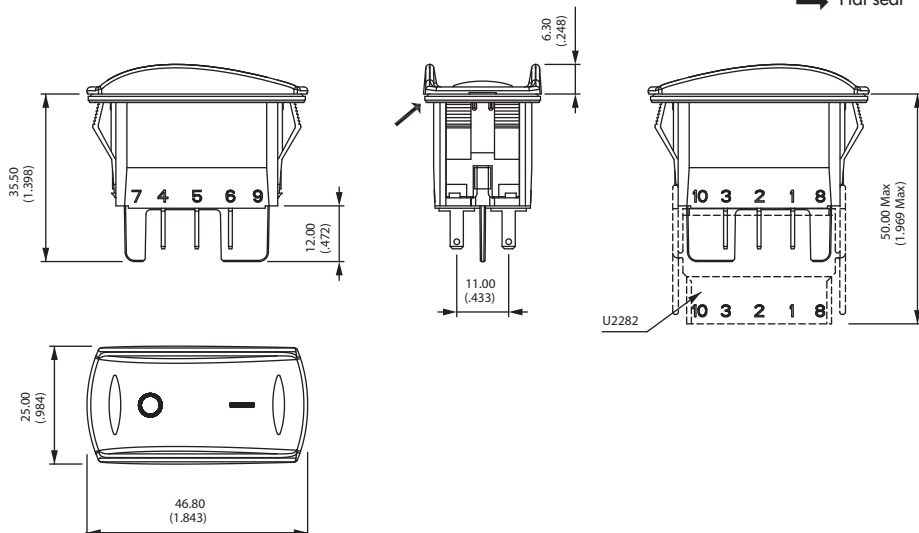

Dimensions : First dimensions are in mm while inches are shown as bracketed numbers.

Tolerance : The general tolerance for dimensions in this brochure is $\pm 0,3$ (.012). Overall dimension tolerance is $\pm 0,5$ (.020).








Packaging unit : 40 pieces

KI series

LED indicators

Selection guide

KI		Side A	Side M	Side B			Side A	Side M	Side B		
SERIES	Colours	LEDS			Type of illumination		Symbols			Sealing	
	<ul style="list-style-type: none"> 1 Blue 1/4 Dark blue 2 Black 3 Green 4 Grey 5 Yellow 6 Red 9 Orange 	<ul style="list-style-type: none"> X None A LED 6V red B LED 6V green C LED 6V yellow M LED 6V blue R LED 6V white D LED 12V red E LED 12V green F LED 12V yellow N LED 12V blue S LED 12V white J LED 24V red K LED 24V green L LED 24V yellow P LED 24V blue T LED 24V white <p style="text-align: center;">DC voltage standard</p>			<ul style="list-style-type: none"> X Standard S Super bright 					<ul style="list-style-type: none"> X No K Yes 	
							Marking orientation			Terminals with barrier	
							<ul style="list-style-type: none"> N  O  S  E  			<ul style="list-style-type: none"> C Solder lug / quick-connect F Quick-connect 6,35 J Quick-connect 2,8 	

On request : 48VDC voltage - AC voltage - new design

Symbols : see page 31.

Accessories : see page 34.




NOTICE : please note that not all combinations of above numbers are available. Refer to the following pages for further information.

KI series

Led indicators

Case - LEDs - Marking


BEZEL COLOUR



Code	Colour
1	Blue
1/4	Dark blue
2	Black
3	Green

Code	Colour
4	Grey
5	Yellow
6	Red
9	Orange


LEDS



Complete each enlarged box with one of the codes listed below.

X Without LED

	Red	Green	Yellow	Blue	White
6VDC	A	B	C	M	R
12VDC	D	E	F	N	S
24VDC	J	K	L	P	T

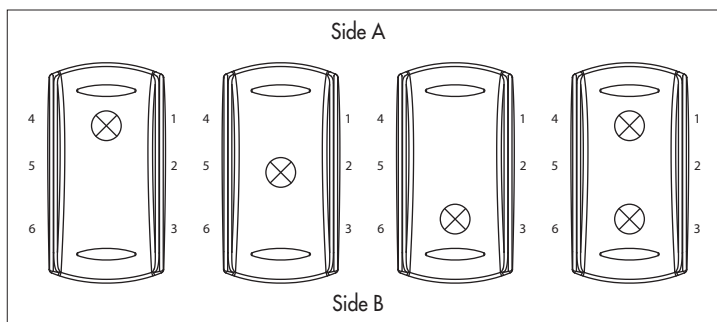

LED consumption : 20mA @ nominal voltage (25°C)

Other illumination solutions : on request.



TYPE OF ILLUMINATION



X Standard
S Super bright

MARKING ORIENTATION

If no marking required, leave box blank. Other orientations : on request

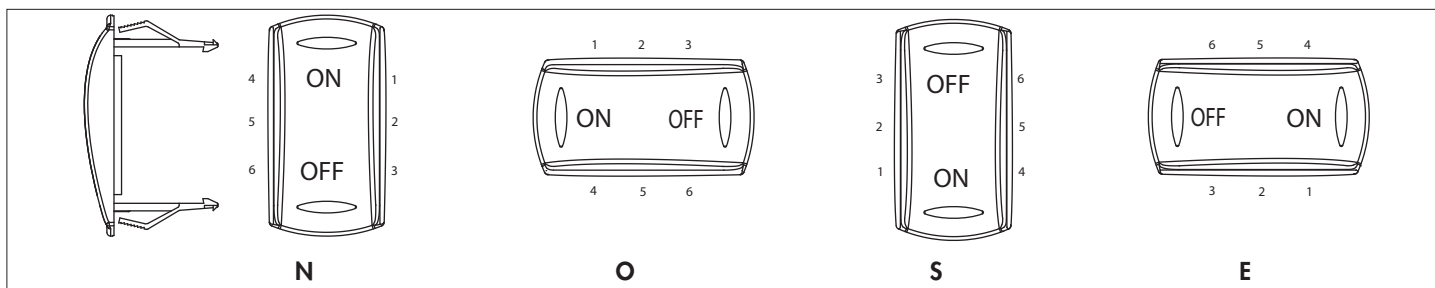


KI series

LED indicators

Marking - Terminals

SYMBOLS



Available symbols : see page 31.



Marking colour

White (laser etching)


Laser etching resistance

- Water and petrol resistant according to EN61058-1
- Tear resistant (cross-cut test) according to NF ISO 2409 : class 0
- UV resistant according to ISO 4892-2

Marking area - The symbol will be included in the hatched area.

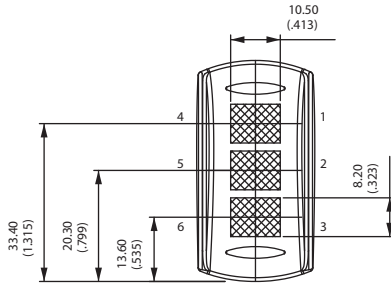





TERMINALS (WITH BARRIER)



Solder lug / quick-connect

Normalized quick-connect 6,35x0,8

Normalized quick-connect 2,8x0,8

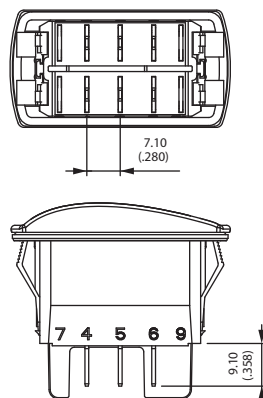

Terminals are marked on the case.

7.10 (.280)

9.10 (.358)


7 4 5 6 9

KI series

Led indicators

Sealing - Mounting

SEALING



- X No sealing
- K IP68 (switch assembled on panel)


Ultrasonic welding of frame to case is standard on all versions.
 The ultrasonic welding and the optional panel seal prevent water and dust from introducing into the switch housing.

*The product shall be installed professionally.
 Test conditions available on request.*







SWITCH PANEL CUT-OUT

Panel thickness : 0,8 mm to 4,6 mm
 Recommended panel thickness :
 between 2 mm and 3,5 mm



MATRIX MOUNTING

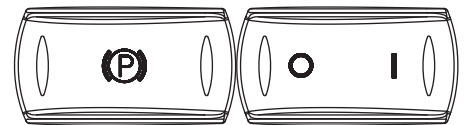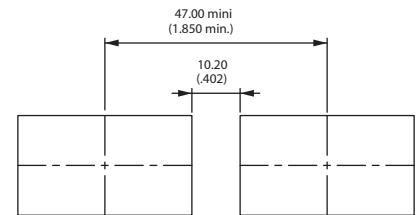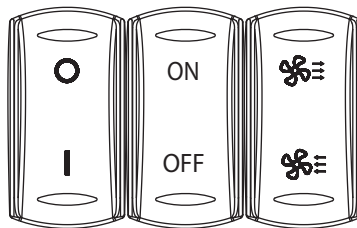

KG series

Power rocker switches

Distinctive features and specifications



- Protected rocker
- Illuminated or non-illuminated
- VDE (EN 61058-1) approved
- Sealed to IP65


ELECTRICAL SPECIFICATIONS

- Current/voltage rating :
 - functions 1 (ON-OFF) and 6 (ON-ON) : 15A 12VDC, 10A 24VDC, 15A 250VAC max., 10mA 14VDC min.
 - functions 4 (ON ON ON) and 4-1R (ON ON MOM) : 8A 12VDC, 5A 24VDC, 8A 250VAC max.
 - other functions : 10A 12VDC, 8A 24VDC, 10A 250VAC max.
- VDE approved ratings : 12(4)A 250VAC, T85/55°C
- Initial contact resistance : 10 mΩ max. at 1A 2VDC
- Insulation resistance : 1.000 MΩ min. at 500VDC
- Dielectric strength : 2.000 Vrms 50 Hz min. between terminals
- Electrical life : 10.000 cycles min.
- Mechanical life : 2 position models : 100.000 cycles min.
3 position models : 30.000 cycles min.

ENVIRONMENTAL SPECIFICATIONS

- Degree of protection : IP65
- Shock resistance : 100 g according to IEC 512-4, test 6c
- Vibration resistance : 10-500 Hz - 10 g according to IEC 512-4, test 6d
- Salt spray resistance : 96 hours according to IEC 512-6, test 11f
- Operating temperature : 2 position models : -40°C to + 85°C
3 position models : -10°C to + 65°C

MATRIX MOUNTING

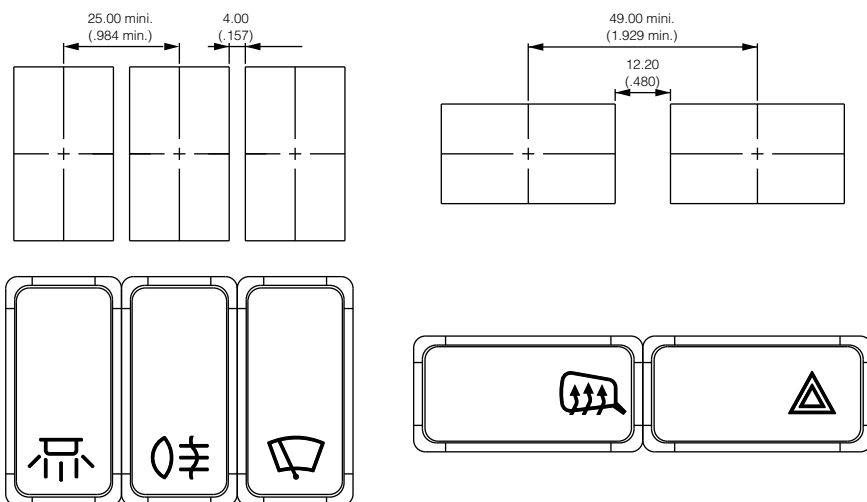

MATERIALS

- Case : thermoplastic UL94-V0
- Terminals : brass, silver plated
- Contacts : silver grain
- Contact roller : brass, nickel plated

AGENCY APPROVAL



EN 61058-1

Availability : double pole models, functions ON-OFF and ON-ON.

Marking : to order switches marked VDE, add "VDE" at the end of model number.

Dimensions : First dimensions are in mm while inches are shown as bracketed numbers.

Tolerance : The general tolerance for dimensions in this brochure is ± 0,3 (.012). Overall dimension tolerance is ± 0,5 (.020).




Packaging unit : 40 pieces

KG series


Power rocker switches

Case

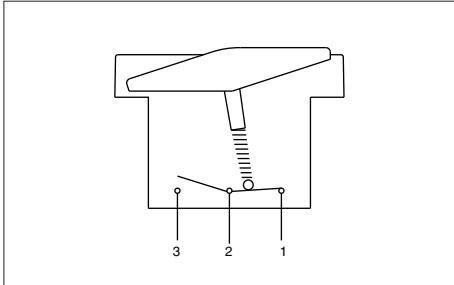


PANEL CUT-OUT

Panel thickness :
0,8 mm to 4,6 mm
Recommended thickness :
between 2 mm and 3,5 mm





MODEL STRUCTURE




	Single pole	Double pole	2-3	1-2	
	KG31	KG41	5-6	4-5	
		KG44*	ON - OFF		
		KG44-1R*	ON ON ON		
	KG35	KG45	MOM - ON		
	KG36	KG46	ON - ON		
	KG37	KG47	MOM OFF MOM		
	KG38	KG48	ON OFF MOM		
	KG39	KG49	ON OFF ON		

* Function 4 : single pole in double pole case


TERMINALS



Screw




Solder lug / quick-connect



Quick-connect


Terminals 1 to 6 are marked on the case.

Side A : terminals 1 and 4
Side B : terminals 3 and 6



Side B

CONTACT MATERIALS




- A** Silver grain
 Functions ON-OFF and ON-ON : 15A 12VDC , 10A 24VDC, 15A 250VAC max. - 10mA 14 VDC min.
 Other functions : 10A 12VDC, 8A 24VDC, 10A 250VAC max.

KG series

Power rocker switches


Lamps

BEZEL



2 Black, sealed to IP65


LAMPS



Complete each enlarged box with one of the codes listed below.





X	Without lamp
A	6V LED red
B	6V LED green
C	6V LED yellow
D	12V LED red
E	12V LED green
F	12V LED yellow
G	18V LED red
H	18V LED green
I	18V LED yellow

J	24V LED red
K	24V LED green
L	24V LED yellow
M	Neon 125V
N	Neon 250V
O	Filament 6V
P	Filament 12V
R	Filament 24V
S	Fluorescent 220V
T	Fluorescent 110V



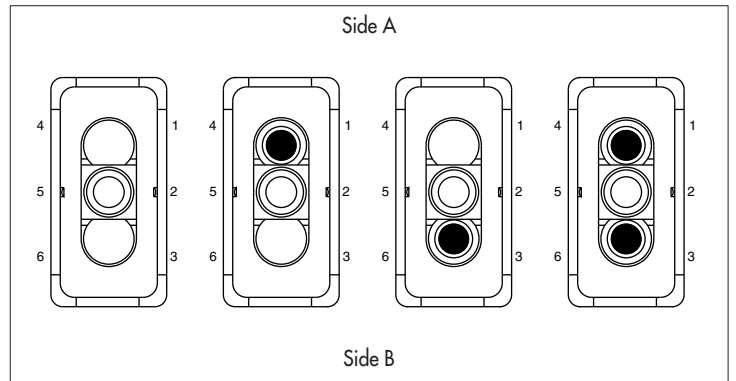


LAMP WIRING

The lamp wiring diagram is shown on the case.

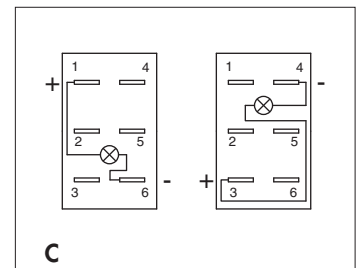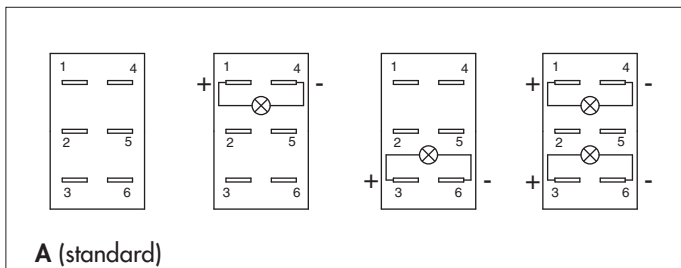

Note : If not available, terminals are added to connect the LED.

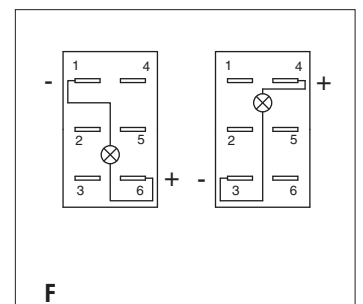


To order case only (without rocker), finish your order number with the lamp wiring code.

KG series

Power rocker switches

Rocker - Lenses


ROCKER COLOUR



1	Blue
1/4	Dark blue
2	Black
3	Green
4	Grey

5	Yellow
6	Red
7	Ivory
9	Orange

ROCKER SHAPE



Full rocker



Opening on side A



Opening on side B




Opening on sides A and B

Other rocker shapes on customer specifications : on request.


To order rocker only (without case), begin the order number with code KGR, then follow the order format from "rocker colour" until the end of the options.

LENS COLOUR



Complete each enlarged box with one of the codes listed below.

X	No lens
1	Blue *
3	Green *
6	Red
9	Orange
B	White
T	Translucent

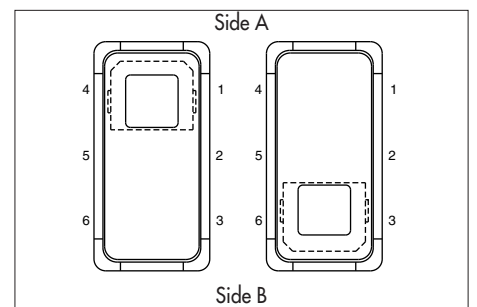

* Blue or green lens recommended with fluorescent lamp.

To order lenses only, begin the order number with the codes :
 KGLA for lens A and KGLB for lens B,
 then follow the order format from "lens colour" until the end of the options.


KG series

Power rocker switches

Marking


MARKING

If no marking required, leave all boxes blank.




Select one option from each of the tables below.

MARKING METHOD	
C	Hot stamping

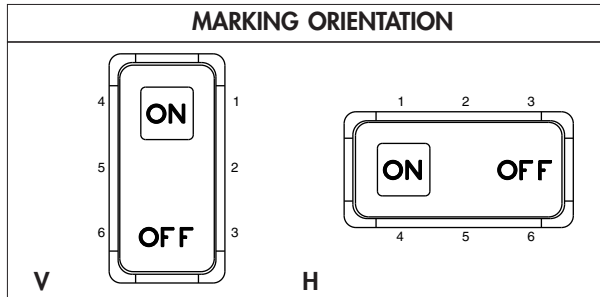

Other orientations :
on request

SYMBOLS





Available symbols : see page 31.

Marking colour

White marking for black rockers - Black marking for colour rockers
 Other : on request.

Marking area

For illuminated versions. The symbol will be included in the hatched area.



range

Power rocker switches and indicators












Symbols

Most symbols meet the ISO 7000 standard "graphical symbols for use on equipments" (code given in bracket in the description). Contact us for symbols not featured in the following tables.

Legend scale :

KR series : 1:1

KL, KG and KI series : depending on space available on the product (see "Symbols" section at the end of each series).

CODE	SYMBOL	DESCRIPTION	CODE	SYMBOL	DESCRIPTION	CODE	SYMBOL	DESCRIPTION
XX	None	-	16		Revolving light	32		Emergency first aid vehicle (2565)
01	ON	-	17		Rear ventilator	33		Load tipping (1557)
02	OFF	-	18		Heating (0637)	34		Loading light (2457)
03	O	-	19		Door opening	35		Tractor, rear-ward (0089)
04	I	-	20		Windshield demister/defroster (0635)	36		Combine, direction of movement (1678)
05	II	-	21		Windshield wiper (0086)	37		Use no forks (2406)
06	STOP	-	22		Windshield washer (0088)	38		Transmission (1166)
07	A	Stop	23		Ventilator fan (0089)	39		Working spot light (1145)
08	M	Motion	24		Side mirror defroster	40		Engine (0634)
09		Up motion	25		Restarting pump	41		Horn (0244)
10		Down motion	26		Front fog lights (0633)	42		Lock (1656)
11		Hot	27		Rear fog lights (0634)	43		Taxi sign light (2551)
12		Cold	28		Propulsion system trim	44		Working light (1024)
13		Hazard warning (0085)	29		Beacon (1141)	45		Working light symmetric (1024)
14		Traveller lighting	30		Anchor	46		-
15		Driver lighting (1421)	31		Electric motor (0011)	47	ASM	-

K range

Power rocker switches and indicators









































Symbols

Most symbols meet the ISO 7000 standard "graphical symbols for use on equipments" (code given in bracket in the description). Contact us for symbols not featured in the following tables.

Legend scale :

KR series : 1:1

KL, KG and KI series : depending on space available on the product (see "Symbols" section at the end of each series).

CODE	SYMBOL	DESCRIPTION	CODE	SYMBOL	DESCRIPTION	CODE	SYMBOL	DESCRIPTION
48		All wheel drive	64		Indicator	80		Front windshield heating
49		Differential lock (1662)	65		Brake release	81	AUS	Aus
50		-	66		Baggage room left door	82		Radiator fan
51		-	67		Baggage room right door	83		Remove retarder
52		-	68		Power blinds	84		Restricted speed
53	N	-	69		Engine idle control	85		Preheater
54		Rear window wiper (0097)	70	CRUISE RES/SET	Cruise res/set	86		ABS detection
55		Rear window washer (0099)	71		Driver windows up/down	87		ECAS detection
56		Lower load (2223)	72		Middle door opening	88		Engine stop
57		Cab lock (1560)	73		Front door opening	89	CRUISE RES/CAN	Cruise res/cancel
58		Extraction	74		Lighting in baggage room	90		ECAS reset
59		Pumping in	75	CRUISE ON/OFF	Cruise on/off	91		Driver windows heating
60		Rear PTO (1572)	76	TV	TV	92	CRUISE SET+/SET-	Cruise set
61		Front PTO	77		Pump	93		Air bag up/down
62		Rockshaft down	78	WC	Toilet	94		Read lighting
63		Rockshaft up	79		Toilet decontamination	95		Lighting main switch

K range

Power rocker switches and indicators




































Symbols

Most symbols meet the ISO 7000 standard "graphical symbols for use on equipments" (code given in bracket in the description). Contact us for symbols not featured in the following tables.

Legend scale :

KR series : 1:1


KL, KG and KI series : depending on space available on the product (see "Symbols" section at the end of each series).

CODE	SYMBOL	DESCRIPTION	CODE	SYMBOL	DESCRIPTION	CODE	SYMBOL	DESCRIPTION
96		Heating using water	AD		-	AV		-
97		Low beam	AE		-	AW		-
98		Position lights	AF		-	AY		-
99		Diesel acceleration	AG		Battery charging condition (0247)	AZ		-
A1		Manual mode	AH		Turn signals (0084)	B1	HIGH	-
A2		Clockwise cabin rotation	AJ		High beam (0082)	B2	LOW	-
A3		Anticlockwise cabin rotation	AK		Differential lock, bogie (2600)	B3		-
A4		-	AL		Brushing with a rotating brush (0070)			
A5		-	AM		Differential lock, transfer case 4x4 (2475)			
A6		Parking brake	AN		Loader bucket, float (1441)			
A7		-	AP		Loader bucket (1437)			
A8		-	AQ		Rear window washer & wiper (0098)			
A9		-	AR		Header Header drive (1579)			
AA		-	AS		Excavator/backhoe boom side shift (2091)			
AB		-	AT		Chemical water treatment (1851)			
AC		-	AU		Grapple skidder, single funct° boom (1762)			


K range

Power rocker switches and indicators

Accessories for KR, KL and KI series

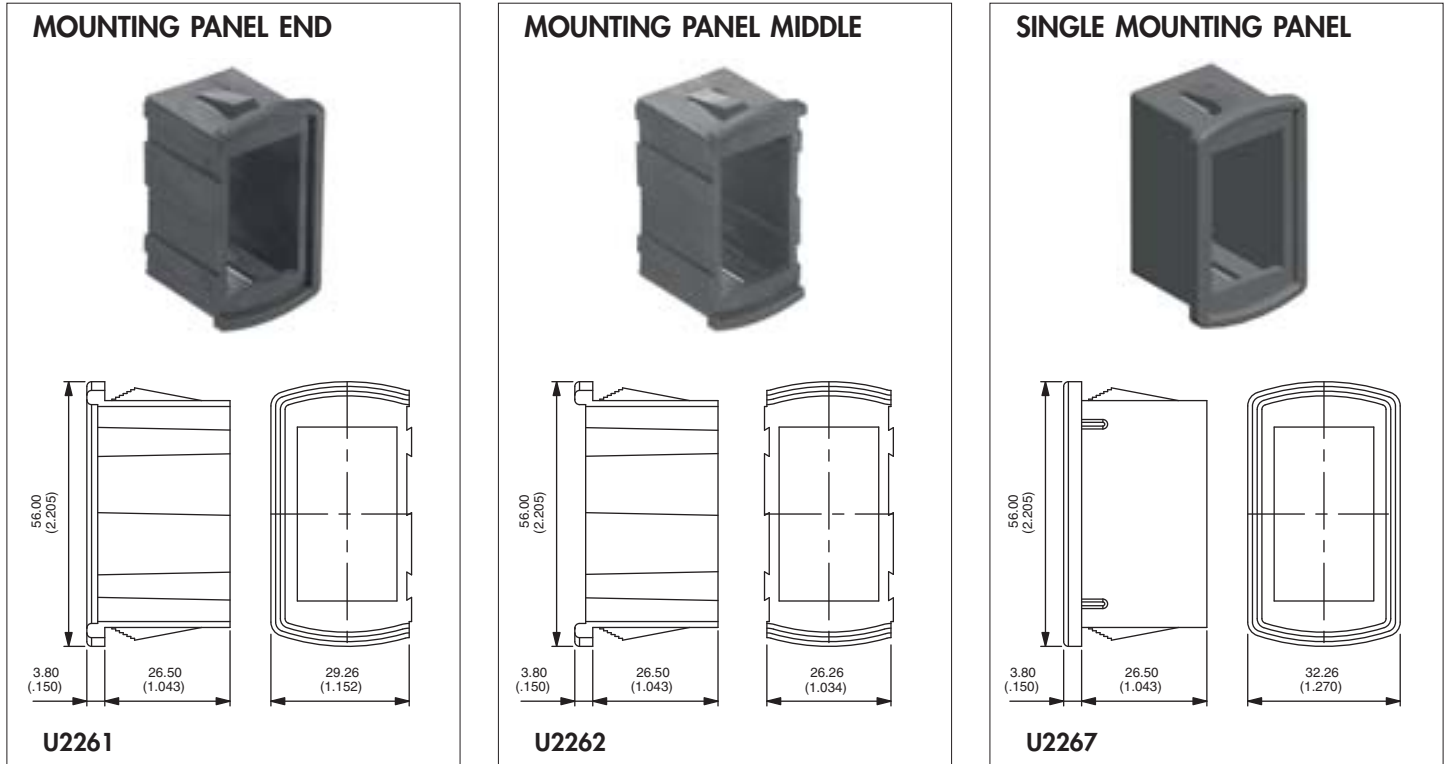

Recommended panel thickness : 1,10 mm - 1,80 mm - 2,60 mm - 3,40 mm - 4,20 mm - 5 mm - 5,80 mm

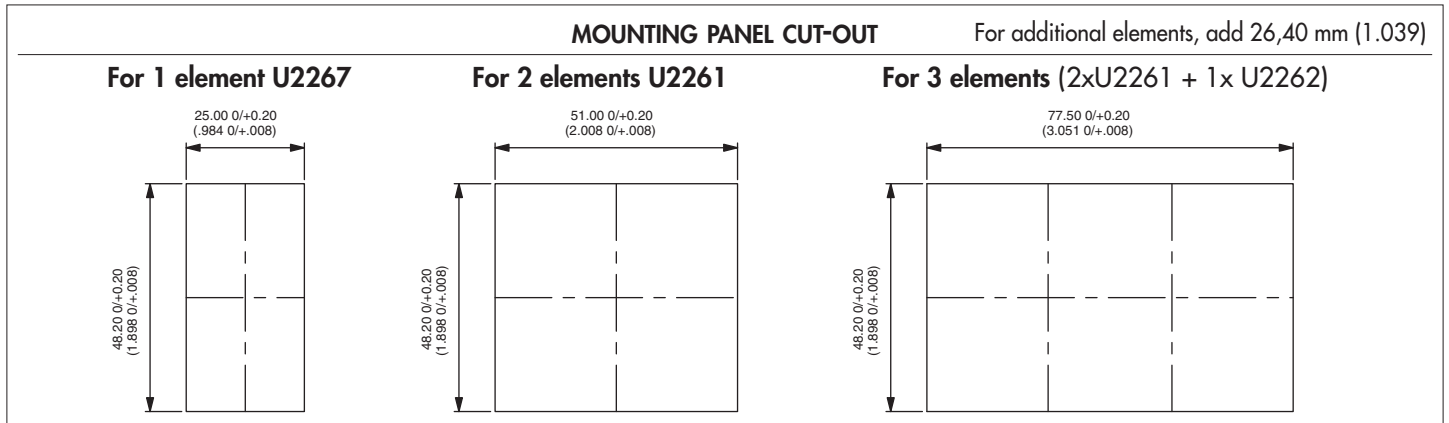

ACTUATOR REMOVING TOOL



EXTRACT ACTUATOR (KR ONLY)

Allows the extraction of the rocker / rocker support assembly.
Place the 2 claws under the support and push as indicated by the arrow.

EXTRACT ROCKER (KR ONLY)

Allows to separate the rocker from its support.
Insert the tool between rocker and support as indicated by the arrow. Pull out the tool in the opposite direction.

EXTRACT SWITCH (KR, KL AND KI)

Allows to extract switch from panel mounting units. 2 tools are necessary.
Insert the tools between switch and panel mounting units from the rear to compress the snap-in device. Pull off switch manually.

2 tools are supplied

K range

Power rocker switches and indicators

Accessories for KR, KL and KI series

CONNECTORS

Standard colour : black. Other colours : on request.
 Connectors cannot be combined with wiring types H and I.






6 terminal version
 For use with terminals type 2, 3, 4 or 5.
 6,35 (1/4) tabs to be fitted by the user
 (example : AMP/Tyco 0-0141013-2).
 Can be used for the KG series.



10 terminal version
 For use with terminals type H or J.
 2,8 (.110) tabs to be fitted by the user
 (example : AMP/Tyco 0-927779-3).



10 terminal version
 For use with terminals type B, C, E or F.
 6,35 (1/4) tabs to be fitted by the user
 (example : AMP/Tyco 0-0141013-2).

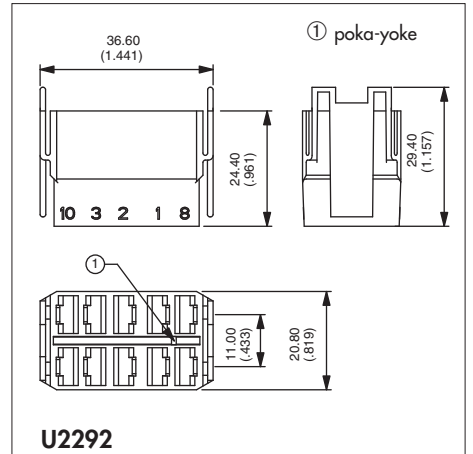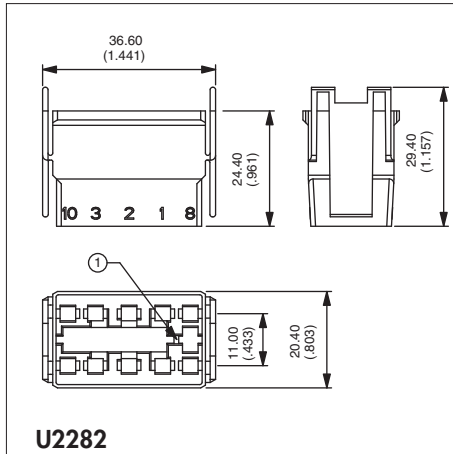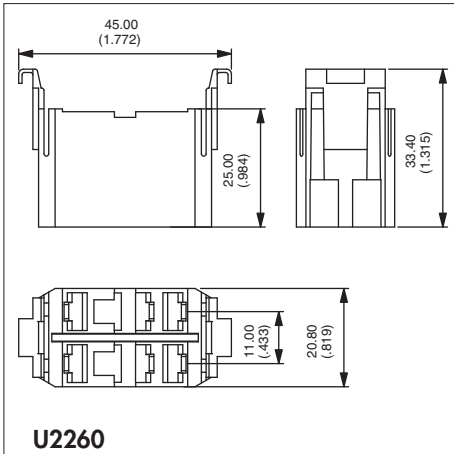


HOLE PLUGS

Usefull for future extensions.

Code	Colour	Code	Colour
U2271	Blue	U2274	Grey
U2271/4	Dark blue	U2275	Yellow
U2272	Black	U2276	Red
U2273	Green	U2277	Ivory
		U2279	Orange

Recommended panel thickness :
 1,50 mm to 6 mm

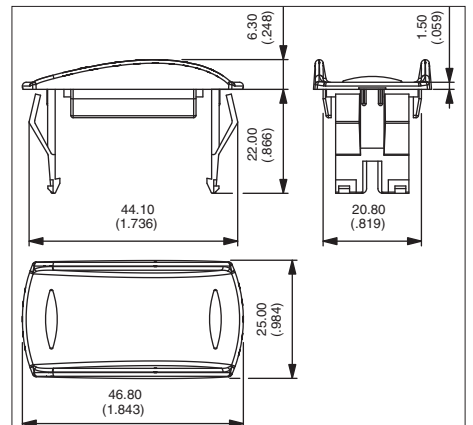

Connectors can be hanged on specific hole plugs. Contact APEM.

APEM, a world of switching capabilities

The APEM group is one of the world's largest manufacturers of switches, switch panels and joysticks.

APEM designs, develops, manufactures and sells electro-mechanical components to multiple industrial markets including: instrumentation, medical, security, communications, industrial automation, avionics, military and transport.

Other APEM embedded products



■ " I " range of pushbuttons

This range consists of several series of IP67 sealed pushbuttons (IP, IB, IS, IF, IA) and a large variety of models: round or square, momentary or latching, illuminated or non-illuminated, plastic or metallic, with optional marking.



■ Specific switch panels


In addition to the switching function, specific switch panels incorporate several other functions such as illumination by LED, backlighting, EMC protection, sealing, connection, support, mounting...

Applications for these products include transport and utility vehicles, agricultural engines and boats.



■ Joysticks

APEM also manufactures joysticks for professional applications. Easy to operate, reliable and designed for extremely long service life, APEM joysticks are offered with a wide range of options allowing to satisfy a large variety of requirements. Several series are available, each one based on a different technology: switch joysticks, potentiometer joysticks and contactless joysticks.



A P E M