

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[10084585-101LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER
SEE TABLE, SHT 4

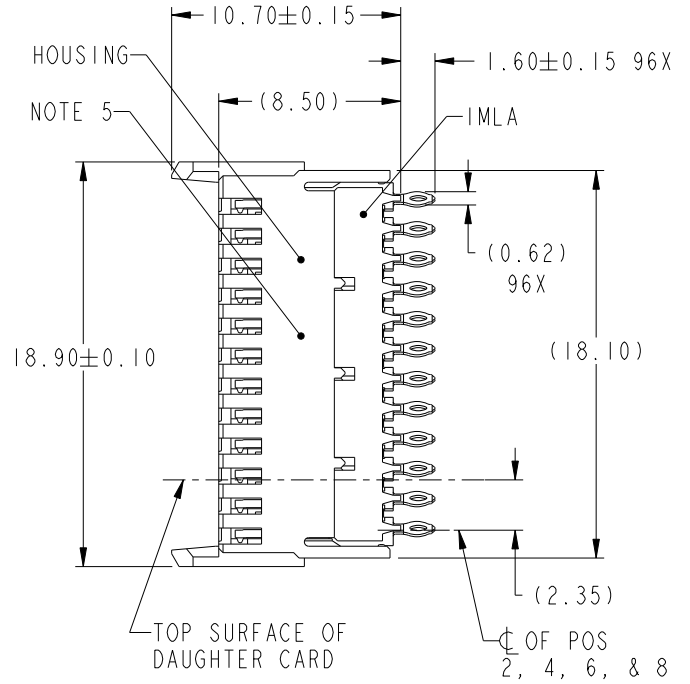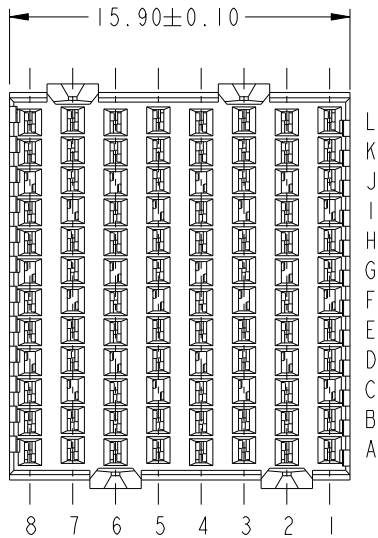


www.fciconnect.com				surface -	tolerance std	projection	MM
				ASME Y14.5	ASME Y14.5		
				TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	L.S. NGWE	2008-06-03		ANGULAR	LINEAR	size	A4
Eng	C.H. TAN	2008-06-13				0.X	±
Chr	C.H. TAN	2008-06-13				0.XX	±
Appr	JOEY NG	2008-06-13				0.XXX	±
				Product family		AirMax VS	Spec ref
				Title		AirMax VS VERT RECPT ASSY	Rev.
				Description		PRESS-FIT, 96 POSITION, 16mm	B
				Catalog no		10084585	sheet 1 of 4
				CUSTOMER			

PDM: Rev:B

STATUS:Released

Printed: Dec 01, 2010

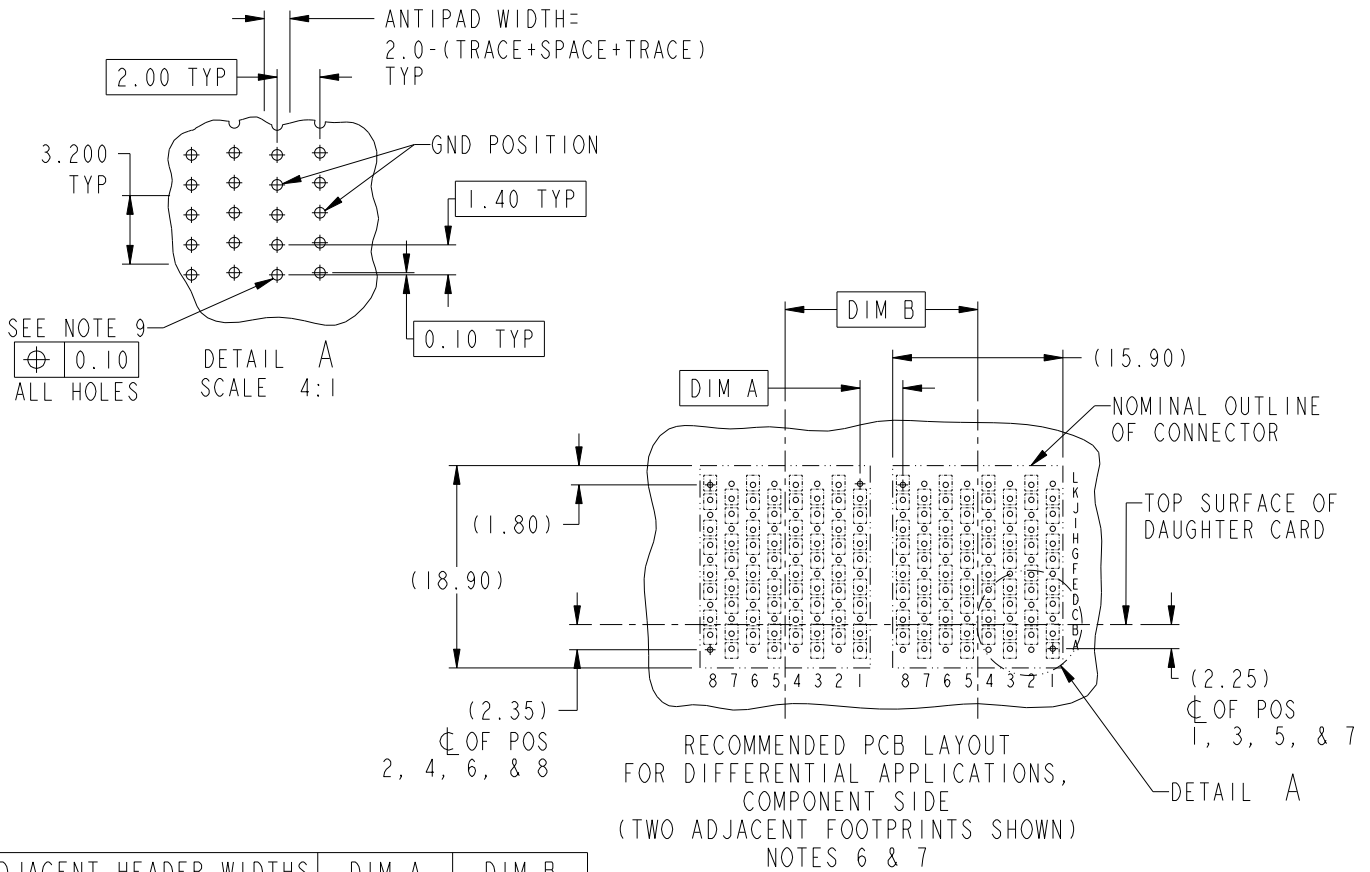

ADJACENT HEADER WIDTHS	DIM A	DIM B
16MM/16MM	2.00	16.00
16MM/18MM	3.00	17.00
18MM/18MM	4.00	18.00


FCI	title	AirMax VS VERT RECPT ASSY	deg no	10084585	Rev.	B
	catalog no	PRESS-FIT, 96 POSITION, 16mm		CUSTOMER	sheet 2 of 4	

REV 7 - 2006-04-11

PDM: Rev:B

STATUS:Released

4Printed: Dec 01, 2010

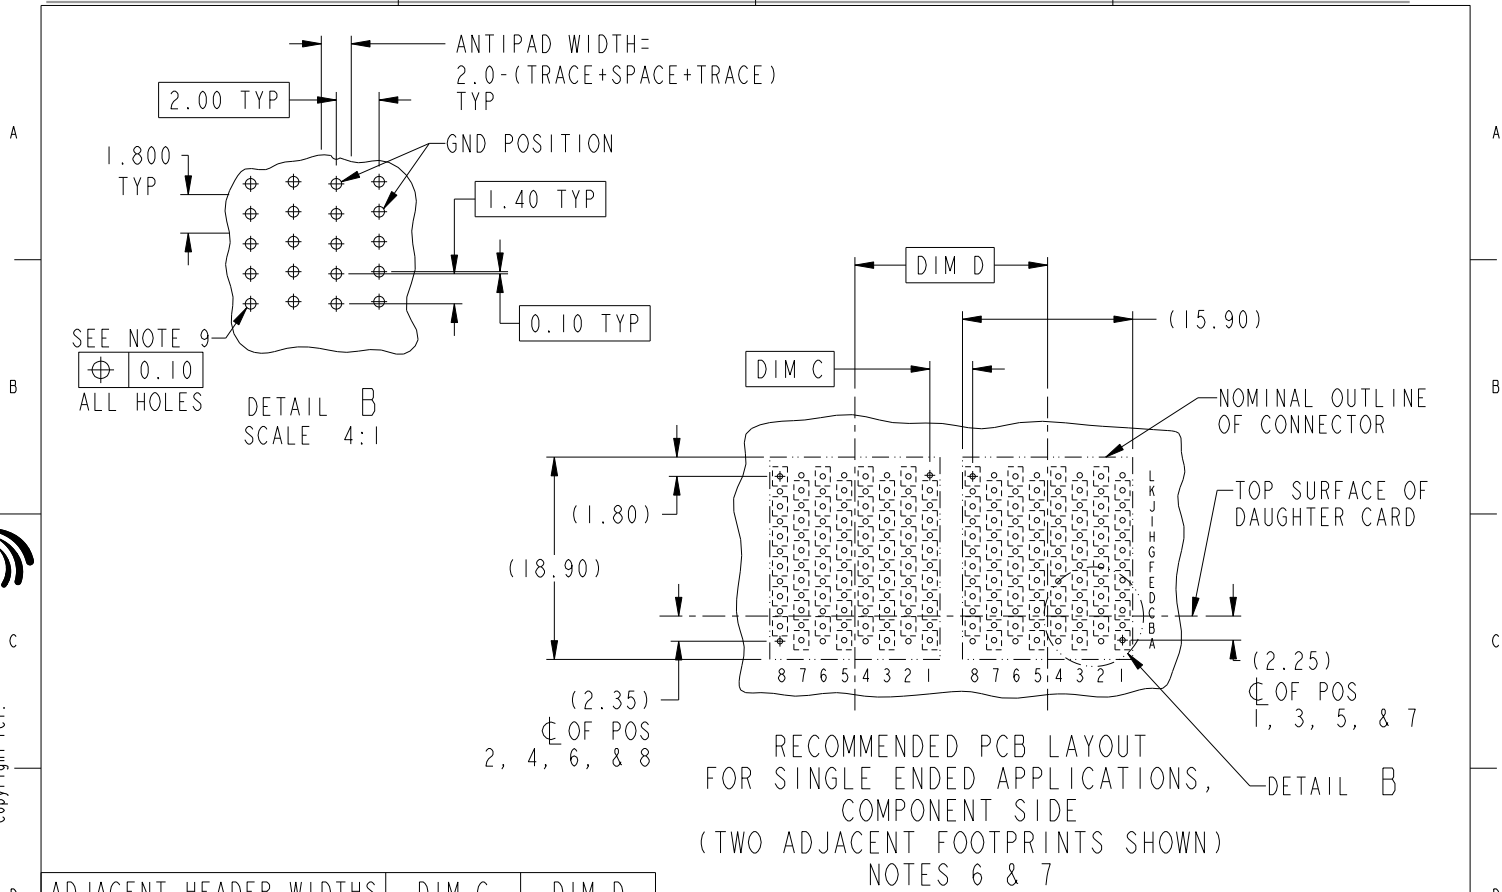

ADJACENT HEADER WIDTHS	DIM C	DIM D
16MM/16MM	2.00	16.00
16MM/18MM	3.00	17.00
18MM/18MM	4.00	18.00

REV 7 - 2006-04-11



title AirMax VS VERT RECPT ASSY
PRESS-FIT, 96 POSITION, 16mm
catalog no -

deg no 10084585

CUSTOMER sheet 3 of 4

Rev. B

PDM: Rev:B

STATUS:Released

4Printed: Dec 01, 2010




Copyright FCI.

PRODUCT NUMBER	PRESS-FIT TAIL PLATING TYPE
10084585-101LF	TIN OVER NICKEL (LEAD FREE)

NOTES:

1. CONNECTOR MATERIALS:
HOUSING: HIGH TEMP THERMOPLASTIC, NATURAL, UL94V-0
IMLA PLASTIC: HIGH TEMP THERMOPLASTIC, BLACK, UL94V-0
CONTACT: COPPER ALLOY
2. CONTACT PLATING:
SEPARABLE INTERFACE:
PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE REQUIREMENTS
OF FCI PRODUCT SPECIFICATION GS-12-239, INCLUDING TELCORDIA
GR-1217-CORE (NOVEMBER 1995) CENTRAL OFFICE.
PRESS-FIT TAILS: SEE TABLE
3. PRODUCT SPECIFICATION: GS-12-239
4. APPLICATION SPECIFICATION: GS-20-035
5. PRODUCT MARKING, (PART NUMBER & LOT CODE),
ON THIS SURFACE
6. REFER TO CUSTOMER DRAWING 10035911 FOR INFORMATION
REGARDING PCB LAYOUT OF POWER AND GUIDE MODULES
RELATIVE TO SIGNAL MODULES
7. POSITION F OF ODD NUMBERED COLUMNS AND POSITION G
OF EVEN NUMBERED COLUMNS CORRESPOND TO EARLY MATE
HEADER PINS
8. THERE IS NO GROUND BUSSING WITHIN THE CONNECTOR SYSTEM
9. SEE CUSTOMER DRAWING 10045979 FOR INFORMATION ON PCB HOLE
DIAMETER AND PLATING OPTIONS
10. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
11. THE HOUSING WILL WITHSTAND EXPOSURE
TO 260°C PEAK TEMPERATURE FOR
40 SECONDS IN A CONVECTION, INFRA-RED
OR VAPOR PHASE REFLOW OVEN
12. PACKAGING MEETS GS-14-920 LEAD FREE
LABELING SPECIFICATION

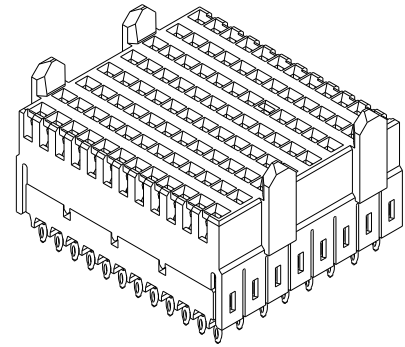

FCI	title	AirMax VS VERT RECPT ASSY	desig no	10084585	Rev.	B
	catalog no	PRESS-FIT, 96 POSITION, 16mm	-	CUSTOMER	sheet 4 of 4	

PDM: Rev:B

STATUS: Released

⁴Printed: Dec 01, 2010

REV F - 2006-04-11

FCI

Copyright FCI.