

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[20021511-00006T1LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

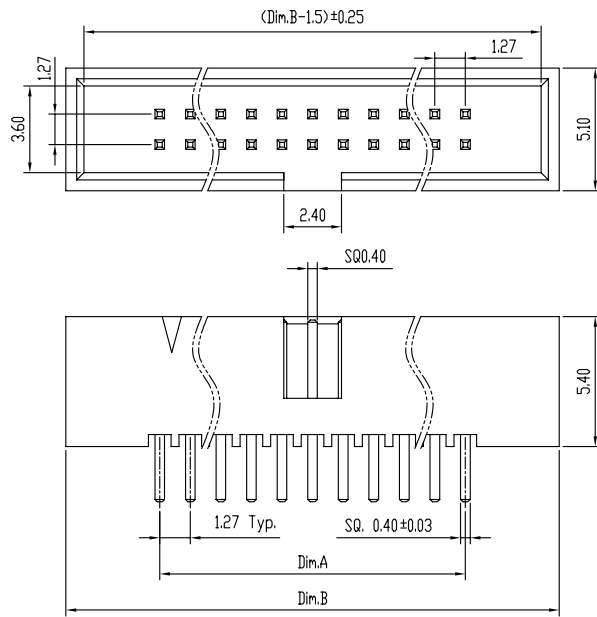

NOTE:

1. MATERIAL:
HOUSING: HIGH TEMP PLASTIC, UL94-V0, BLACK
TERMINAL: COPPER ALLOY, SQ=0.40±0.03MM
2. FINISH:
TERMINAL: GOLD AT CONTACT,
G/F OVER 1um(40u") MIN Ni OVER ALL
3. SPEC.:
PRODUCT SPEC: GS-12-629
PACKING SPEC: GS-14-1420
4. THE HSG. WILL WITHSTAND EXPOSURE TO 260C
PEAK TEMP. FOR 5 SEC. IN A WAVE SOLDER APPLICATION
WITH A PCB.
5. PRODUCT NUMBERING:
20021511 - 0 0 0 XX X X LF

LEAD FREE

PLATING:
1: GOLD FLASH ALL OVER
4: 0.25um(10u") GOLD AT CONTACT
8: 0.76um(30u") GOLD AT CONTACT
9: 1u" GOLD OVER 30u" PdNi AT CONTACT
PACKING
T: TUBE
PIN COUNT
SEE TABLE 1

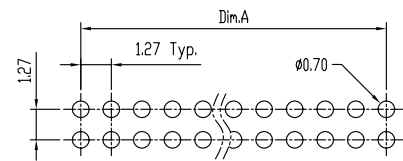



TABLE 1 ,DIM INFORMATION

DASH No.	Dim.	Amount of Pins	Dim.A	Dim.B
-000 06 XX LF	06	2.54	10.11	
-000 10 XX LF	10	5.08	12.65	
-000 12 XX LF	12	6.35	13.92	
-000 14 XX LF	14	7.62	15.19	
-000 16 XX LF	16	8.89	16.46	
-000 20 XX LF	20	11.43	19.00	
-000 26 XX LF	26	15.24	22.81	
-000 30 XX LF	30	17.78	25.35	

DASH No.	Dim.	Amount of Pins	Dim.A	Dim.B
-000 34 XX LF	34	20.32	27.89	
-000 40 XX LF	40	24.13	31.70	
-000 44 XX LF	44	26.67	34.24	
-000 50 XX LF	50	30.48	38.05	
-000 60 XX LF	60	36.83	44.40	
-000 64 XX LF	64	39.37	46.94	
-000 68 XX LF	68	41.91	49.48	
-000 80 XX LF	80	49.53	57.10	
-000 A0 XX LF	100	62.23	69.80	

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

mat'l. code	surface	tolerance	projection	product family
A T09-1117	ISDI302	ISDI101 ISDI406	0.1	MINITEK
B T10-0022	tolerances unless otherwise specified	0.X±0.38	MM	1.27X1.27MM BTB HEADER
C 01X-M-010362	angle	0.XX±0.25	scale 5:1	SHROUDED VERTICAL TH
dr	STERLING LIN	09/15/09		dwg no
eng	STERLING LIN	09/15/09		sheet 1 of 1
chr	GRAY HSIEH	09/15/09		size
appd	JOSEPH	09/15/09		A4
sheet	revision			type
index	sheet	1		Product Customer Drawing