

## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Integrated Device Technology \(IDT\)](#)

[4MA156250Z3AACTGI8](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



# 156.25 MHz LVPECL Oscillator


*High Performance Differential MEMS Oscillator*

4MA156250Z3

DATASHEET

## Features

- Frequency: 156.25 MHz
- Output Type: LVPECL
- Frequency Stability:  $\pm 50\text{ppm}$
- Supply Voltage: 2.5V & 3.3V
- Standard Packages: 5.0 x 3.2 mm; 7.0 x 5.0 mm
- RMS phase jitter: 0.5ps typical (12k to 20MHz)
- Operating Temperature: -40 to 85 °C

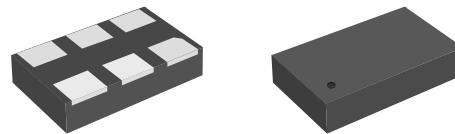


7.0 x 5.0 mm package shown  
(also available in 5.0 x 3.2mm pkg)


## Specification

Parameter	2.5 V Specifications			3.3 V Specifications			Units	Conditions
	Min	Typ	Max	Min	Typ	Max		
Supply Voltage ( $V_{DD}$ )	2.375	2.50	2.625	2.97	3.30	3.63	V	
Output Frequency		156.25			156.25		MHz	
Frequency Stability	-50		+50	-50		+50	ppm	Includes supply voltage and temperature variation (-40 to 85°C), reflow drift, and aging.
Supply Current		95			100		mA	No load
Enable/Disable Time			1			1	us	Guaranteed by design
Input LOW level			0.3 $V_{DD}$			0.3 $V_{DD}$	V	At OE pin
Input HIGH level	0.7 $V_{DD}$			0.7 $V_{DD}$			V	At OE pin
Output LOW level		0.8	$V_{DD}$ -1.8		1.5	$V_{DD}$ -1.8	V	
Output HIGH level	$V_{DD}$ -1.0	1.6		$V_{DD}$ -1.1	2.3		V	
Amplitude ( $V_A$ )		0.75			0.75		V	Single Ended output swing (Pk-Pk)
Mid Level ( $V_M$ )	$V_{DD}$ -1.3			$V_{DD}$ -1.3			V	
Rise Time ( $T_R$ )		200	250		170	230	ps	Maximum; 20/80% of $V_A$ ; Output load ( $CL$ ) = 2pF; Guaranteed by Char.
Fall Time ( $T_F$ )		200	250		170	230	ps	Maximum; 20/80% of $V_A$ ; Output load ( $CL$ ) = 2pF; Guaranteed by Char.
Symmetry (SYM)	48	50	52	48	50	52	%	Worst case; measured at 50% of waveform
Phase Jitter		0.6			0.5		ps	12k to 20MHz, RMS; Measured Differentially
Period Jitter		2.4			2.2		ps	RMS
Cycle-to-Cycle Jitter		18			16		ps	1,000 cycles, Peak
Start-up Time		10			10		ms	Output valid time after power up, 25°C
Aging		$\pm 5$			$\pm 5$		ppm	25°C, 10 years

## Block Diagram

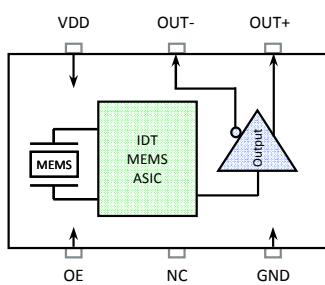


## Output Waveform

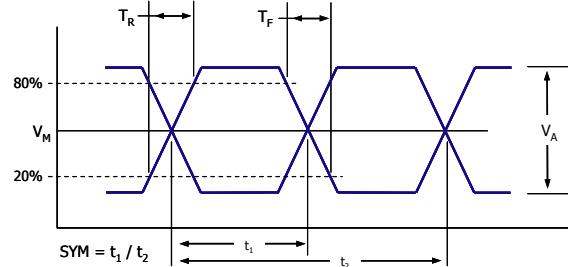

## Part Ordering Information

Package Size	Voltage	Ordering Code
7.0 x 5.0 mm	3.3 V	4MA156250Z3AACUGI
	2.5 V	4MA156250Z3BACUGI
5.0 x 3.2 mm	3.3 V	4MA156250Z3AACTGI
	2.5 V	4MA156250Z3BACTGI

\* Factory minimum order quantity: 500pcs (T/R)

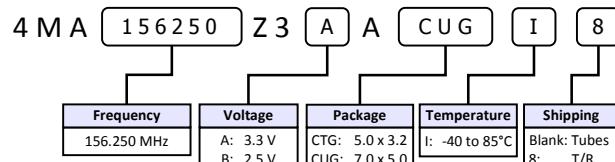

## 4MA156250Z3 Datasheet


156.25 MHz LVPECL MEMS Oscillator

### Pin Description

Pin #	Name	Description
1	OE	Output Enable*
2	NC	No Connect
3	GND	Ground
4	OUT+	Output
5	OUT-	Complementary Output
6	VDD	Power Supply Voltage

\* Pulled high internally

### Solder Reflow Profile

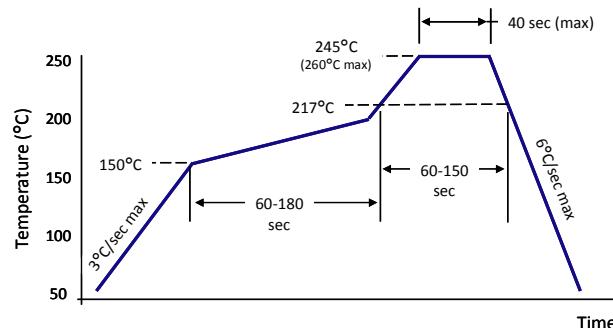

### Package Outline and Dimensions

