

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:





[FCI](#)
[91125-002LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



P. C. B. HOLE PATTERN VIEWED FROM TOP.

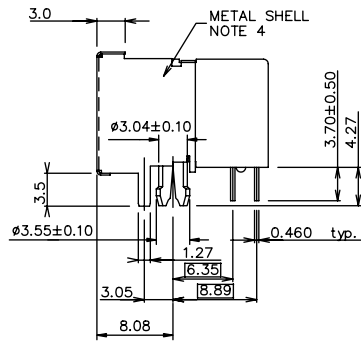

NOTES:

1. RECOMMENDED P.C.B THICKNESS 1.60 MM
2. HOUSING MAT'L: NYLON 66, 25% GLASS REINFORCED, UL94V-0, COLOR: BLACK
3. CONTACTS: PHOS BRONZE ALLOY UNS-C51000, Ø0.460 DIA, ROUND WIRE, PLATING: SEE TABLE.
4. METAL SHELL MATERIAL:
COPPER ALLOY, 0.20MM THICK.
FOR -XXX: FINISH: TIN-LEAD, 100 u" THICK MIN.
FOR -XXXLF: FINISH: PURE BRIGHT TIN 80u THICK MIN.
5. PACKAGING PER GES-14-361, USING TUBE.
6. IF LF P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
7. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.60mm MINIMUM THICK CIRCUIT BOARD.
8. IF LF P/N PACKAGING MEETS GS-14-920 SPECIFICATION.

PRODUCT NO.	NO. OF POSITION	LOADED POSITION	CONTACTS PLATING
91125-002/-002LF	8	1,2,3,6	30u" GXT
91125-004/-004LF	8	ALL POS.	2u" GOLD

mat'l. code				surface	tolerance	projection	product family	
ltr	ecr no	dr	date	tolerances unless otherwise specified			MOD JACK	
C	T70163	C.L	04/30/97	angles	linear	.0 ± 0.25	title MODIFIED LOW PROFILE PCB III 8-POS SHIELDED MOD JACK, WITHOUT PANEL STOP	
D	T80306	C.L	07/15/98	linear		.00 ± 0.13		
E	T80321	C.L	07/23/98	linear		.000 ± 0.05		
F	T03-0443	WL	10/06/03	dr	C.L FENG	02/22/95	dwg no 91125	
G	N05-0019	YS	01/27/05	engr	TONY CHEN	02/22/95		
				chr	TONY CHEN	02/22/95		
				appr	JENN TSAO	02/22/95	type CUSTOMER Drawing	
sheet index	revision sheet	G	1					

PDM: Rev:G

STATUS: Released

Printed: Aug 01, 2010