

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)

[D09P24A6RL12LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Series **D xx P 24A 6 xx 12 LF**

Number of contacts
09 , 15 , 25

Contacts
P : Pin

Termination

Code	Type	Foot Print/Pitch	Length of termination	PCB thickness
24A	Straight version	6 / 2.84mm	2	1.6

Plating
6 : 500 Mating / Unmating Mini

Packaging specification
Tape and Reel

See Note RoHS

NOTE RoHS INFORMATION

- The "LF" product meet european union Directives and other country regulations asdescribed in GS-22-008.
- The housing will withstand exposure to 260° peak temperature for 30 seconds in a convection , infra-red or vapor reflow oven. See application notes/procedures if are available.
- Termination plating spec:1.27µ Nickel mini,2.5 to 7.5µ Sn(pure mate)
- Shell plating : Nickel bright
- Accessories : Sn pure bright
- Packaging spec ; See GS-14-920

Mounting Options

RL	Insert M3
RV	Female Screw UNC 4-40
RX	Insert UNC 4-40

Product Specification

see : GS-12-372

Packaging Specification





See GS-14-1054

lir	ecn no	dr	date
A	-	LH	03/02/06
B	LS06-0040	PC	23/03/06
C	LS06-0105	HLE	25/07/06
D	LS06-0220	PCR	2006/12/21
E	LS07-0050	HLE	2007/03/02
F	110-0120	NG	2010-05-27
G	110-0197	NG	2010-10-14

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection mm	mm
TOLERANCES UNLESS OTHERWISE SPECIFIED		ANGULAR	LINEAR	size A3	Scale 3:1
Dr P.CRON		03/02/06	0.X	±0.3	
Eng H.LEGALLIC		03/02/06	0.XX	±0.1	
Chr NIRMAL G		2010-10-14	0.XXX	±0.05	ECN 110-0197
Appr SUDHIR V		2010-10-14	Product family SUB DELTA D PIP		Spec ref -
FCI		SUB DELTA D PIP MALE		eng no C01-8646-0876	Rev. G
straight for tape and reel packaging		SEE TABLE		CUSTOMER COPY sheet 1 of 2	
catalog no					

REV F - 2006-04-17


Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

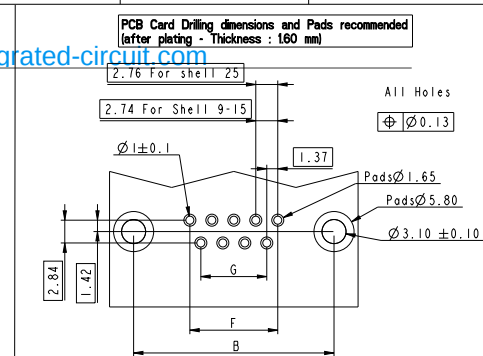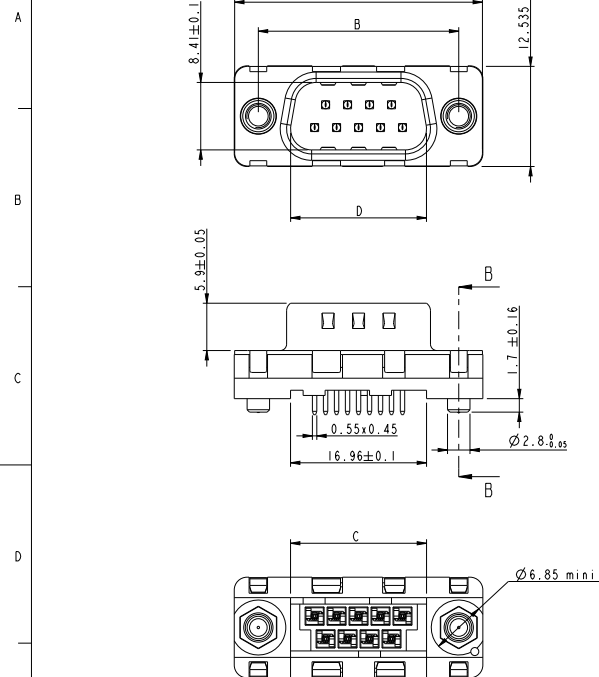

TRUE POSITIONING : $\oplus \ominus \varnothing 0.36$

SHELL	P/N LEAD FREE	A ±0.38	B ±0.10	C ±0.10	D ±0.25 0	E ±0.15 0	F	G
09	D09P24A6xx12LF	30.81	24.99	16.96	16.79	5.9	10.96	8.22
15	D15P24A6xx12LF	39.14	33.32	25.18	25.12	5.9	19.18	16.44
25	D25P24A6xx12LF	53.03	47.04	39.12	38.84	5.7	33.12	30.36

Accessories details

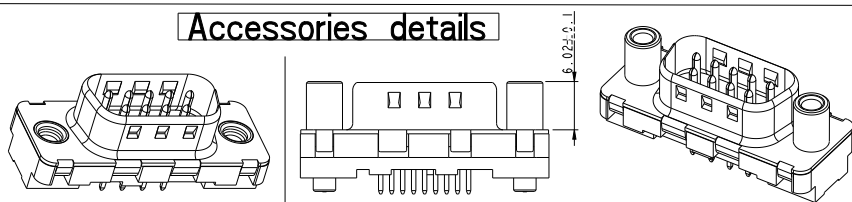

TYPE RX / RL

TYPE RV

www.fciconnect.com		surface	✓	tolerance std	projection	mm
Dr. P. CRON		ISO 1302	✓	ISO 486	ISO 1101	mm
Exp. H. LEGALLIC		TOLERANCES UNLESS OTHERWISE SPECIFIED				
Chr. N. RIMAL G		ANGULAR	8.1	±0.3	size	Scale
Appr. SUDHIR V		LINEAR	0.14	±0.1	A2	3:1
2010-10-14		Product fam	ISO 1101	±0.45	ECM	110-0197
2010-10-14		Product fam	ISO 1101	±0.45	ECM	110-0197
SUB DELTA D PIP MALE		Product fam	ISO 1101	±0.45	ECM	110-0197
straight for tape and reel packaging		Product fam	ISO 1101	±0.45	ECM	110-0197
SEE TABLE		Product fam	ISO 1101	±0.45	ECM	110-0197
C01-8646-0876		Product fam	ISO 1101	±0.45	ECM	110-0197
CUSTOMER COPY		Product fam	ISO 1101	±0.45	ECM	110-0197
sheet 2 of 2		Product fam	ISO 1101	±0.45	ECM	110-0197