

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[D3W3P36B6GV08LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

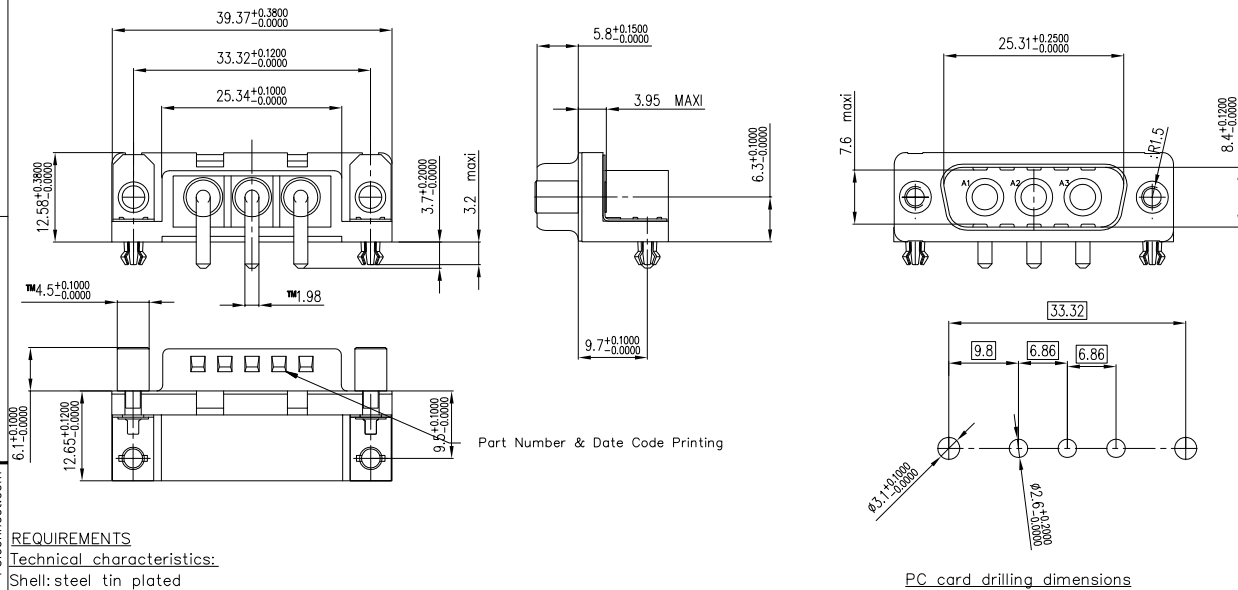

REQUIREMENTS

Technical characteristics:

Shell: steel tin plated

Insulators: self-extinguishing thermoplastic, UL class 94V0

Contacts: brass, 0.76» Au + 2» Ni mini on mating end and 2» Sn + 1.27 Ni mini on termination end

Grounding brackets: brass, tin plated

Female screwlock: brass, tin plated

Harpoon: brass, tin plated

Electrical characteristics:

max. current rating: 30A per contact

Test voltage: 1000V

Rated voltage: 300V

Contact resistance: ?5m?

Shell resistance: ?5m?

Insulation resistance: *5000M?

Climatic characteristics:

Operating temperature range: -55?c +125?c

Dimensions:

in accordance with MIL-C-24308

mat'l. code				surface		tolerance		projection		product family DELTA-D	
SEE NOTE 4				ISO 1302		ISO 406 ISO 1101		MM		title	
ltr	ecn no	dr	date	tolerances unless otherwise specified		O.X		MM		RIGHT ANGLE, HARPOON, METAL PLATE	
C	105-0124	JS	2005-7-27	angles		O.XX		scale		dwg no	
D	106-0074	SK	2006-06-08	linear		O.XXX		FCI		C01-8646-0333	
E	107-0176	AS	2007-12-19	enrg ±1°		O.XXX		type CUSTOMER		sheet 1 of 1	
				Dr		Mini K Vardarath		1994-12-09		size A3	
				enrg		Anish Sahan		2007-12-19			
				chr		Anish Sahan		2007-12-19			
				appd		Sudhir Varma		2007-12-19			
sheet index	revision	E									
	sheet	1									

PDM: Rev:E

STATUS: Released

Printed: Jan 18, 2011