

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[FCI](#)

[DEPV09P465TXLF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

50	P	66.65	52.30	61.11	11.08	14.99	11.09	5.85	55.07	13.31	1.50	1.0	0
	S	66.65	52.30	61.11	11.08	14.99	11.21	6.05	55.07	13.31	1.50	1.0	0
	SH	66.65	52.30	61.11	11.08	14.99	11.21	6.05	55.07	13.31	1.50	1.0	0
25	P	68.84	53.34	63.50	8.23	12.17	11.09	5.85	57.45	10.46	1.50	1.0	0
	S	68.84	53.34	63.50	7.77	12.17	11.21	6.05	57.45	10.46	1.50	1.0	0
	SH	68.84	53.34	63.50	7.77	12.17	11.21	6.05	57.45	10.46	1.50	1.0	0
19	P	52.65	38.64	47.04	8.23	12.17	11.07	5.85	41.02	10.46	1.10	0.8	0
	S	52.65	38.64	47.04	8.23	12.17	11.21	6.05	41.02	10.46	1.10	0.8	0
	SH	52.65	38.64	47.04	8.23	12.17	11.21	6.05	41.02	10.46	1.10	0.8	0
09	P	38.76	24.54	33.32	7.77	12.17	11.21	5.85	27.25	10.46	1.10	0.8	0
	S	38.76	24.54	33.32	7.77	12.17	11.09	5.85	19.02	10.46	1.10	0.8	0
	SH	38.76	24.54	33.32	7.77	12.17	11.21	6.05	19.02	10.46	1.10	0.8	0
SHELL	P	+0.76	+0.25	+0.12	-0.25	+0.76	MAX	+0.51	+0.51	+0.20	+0.24	+0.24	0
	S	+0.76	+0.25	+0.12	-0.25	+0.76	MAX	+0.51	+0.51	+0.20	+0.24	+0.24	0
	SH	+0.76	+0.25	+0.12	-0.25	+0.76	MAX	+0.51	+0.51	+0.20	+0.24	+0.24	0

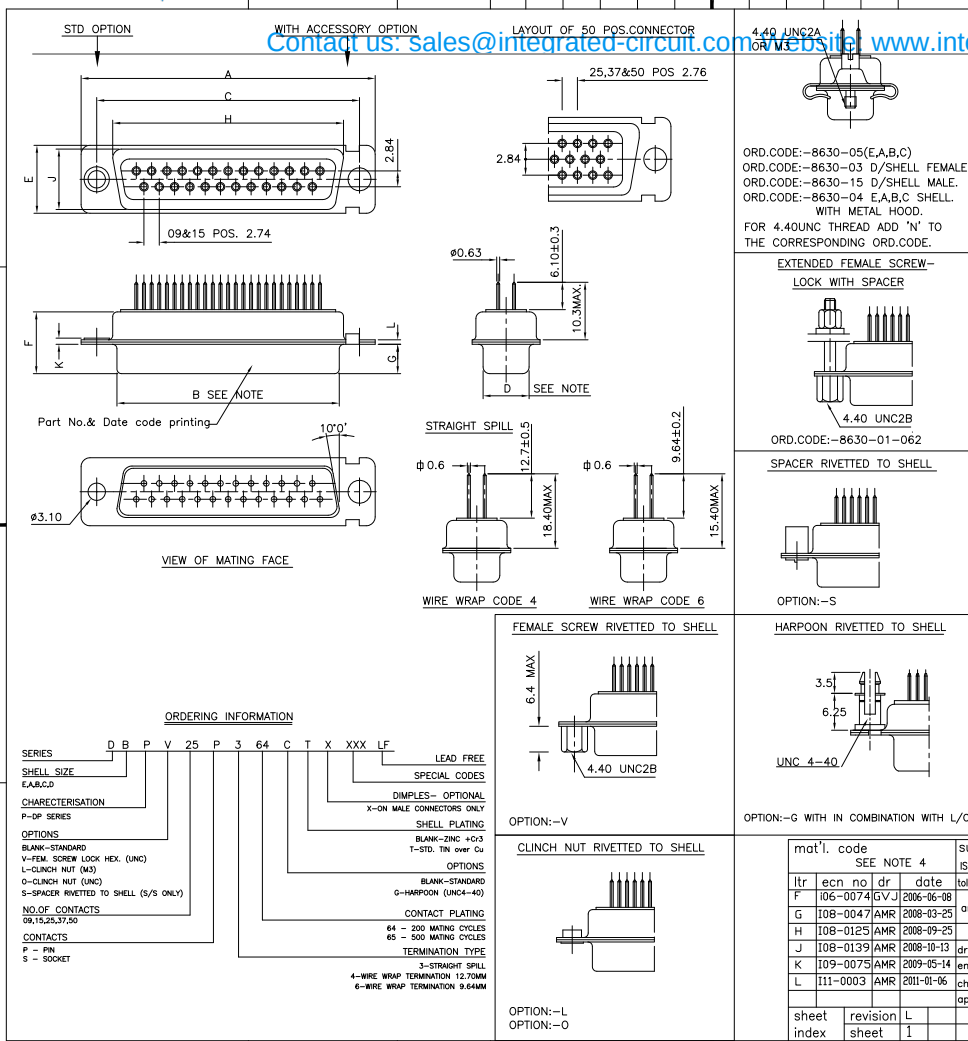

<u>TECHNICAL SPECIFICATIONS</u>	
SHELLS	: TIN/ZINC PLATED STEEL
INSULATOR MATERIAL	: SELF EXTINGUISHING THERMOPLASTIC- TO UL CLASS 94 V-0
	THE HOUSING WILL WITHSTAND EXPOSURE TO 260-265°C IF WE USE PROTECTIVE ADHESIVE (type Kapton or Teflon) OR PROTECTIVE METALLIC DEVICE
CONTACTS DIA ON ACTIVE AREA	: #1 MM.
CONTACTS MATERIAL	: COPPER ALLOY
CONTACT PLATING	: GXT / GOLD OVER NICKEL
OPERATING TEMPERATURE	: -55°C +125°C
OPERATING CURRENT	: 7.5 A PER CONTACT
CONTACT RESISTANCE	: <7.3 mΩ
INSULATION RESISTANCE	: >5000 MΩ
MAXIMUM VOLTAGE	: 1000 V.r.m.s
MECHANICAL ENDURANCE	: 500 MATINGS FOR CODE 65 200 MATINGS FOR CODE 64
DAMP HEAT	: 56 DAYS FOR CODE 65 21 DAYS FOR CODE 64

"This LF product meets European Union Directives and other country regulations as described in GS-22-008"

The housing will withstand exposure to 260°C peak temperature for 3.5 seconds in a wave solder application with a 1.6mm minimum thick circuit board.
Packaging as per GS-14-920

-G WITH IN COMBINATION WITH L/O				NOTE:-INSIDE DIMENSIONS OF MALE AND OUTSIDE DIMENSIONS OF THE FEMALE CONNECTOR.					
mat'l. code SEE NOTE 4				surface ☒ tolerance ISO 1302 ISO 406 ISO 1101 tolerances unless otherwise specified		projection 		product family D-SUB	
trf	ecn	dr	date	angles linear		title D-SUB S/S,W/W CONNECTOR (DP SERIES WITH ASSEMBLY OPTIONS)			
I	106-0074	GV	2006-06-08			scale —	dwg no sheet 1 of 1 size A3		
G	108-0047	AMR	2008-03-25						
H	108-0125	AMR	2008-09-25						
J	108-0139	AMR	2008-10-13						
K	109-0075	AMR	2009-05-14	engr chr	Georgy V Vardarath Abhilash M R Sudhly Varma	1999-03-20 1999-03-20 2008-09-25 2008-09-25		C-DSUB-0067	
L	111-0003	AMR	2011-01-06						
sheet index		revision sheet		L	1	appd		type Product Customer Drawing	