

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[FCI](#)
[76772-101LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com





PRODUCT NUMBER	DIM "A"	DIM "L"	DIM "H"	DIM "R"	DIM "X"	PLATING CONTACT AREA	PLATING REMAINDER OF PIN
76772-101	6.28/.247	8.76/.345	5.97/.235	1.22/.048	5.30/.209	1.27µm/50µ" Au OVER 1.27µm/50µ" Ni	0.2µm/8µ" Au OVER 1.27µm/50µ" Ni
76772-101LF	6.28/.247	8.76/.345	5.97/.235	1.22/.048	5.30/.209	1.27µm/50µ" Au OVER 1.27µm/50µ" Ni	0.2µm/8µ" Au OVER 1.27µm/50µ" Ni

REELING PRODUCT TO CUSTOMER




NOTES:


- BURNISH MARKS PERMITTED ON PIN.
- BASE MATERIAL PIN: 3/4 HARD PHOSPER BRONZE A.S.T.M. B-159-66.
- CARRIER STRIP MATERIAL: 1/2 HARD BRASS A.S.T.M. B-36-67 ALLOY 260.
- MAX. BURRS PERMITTED IN AREA "Y" IS 0.01/.004 OVER AREA "Z" 0.04/0.016.
- PIN TIP NOT PLATED ON THIS SIDE.
- WITH THE EXCEPTION OF STAR AREA. RADIUS AT 4 PIN CORNERS MAX. 0.05/0.002.
- PART NUMBERS WITH A LF SUFFIX MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

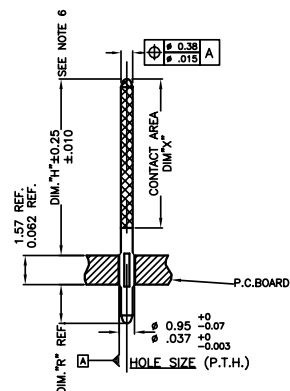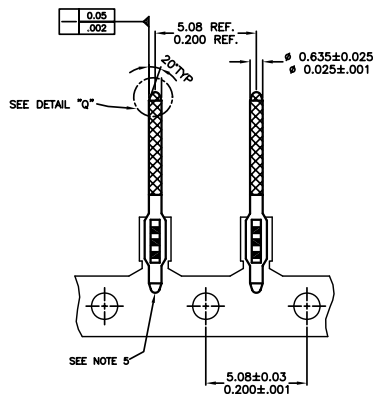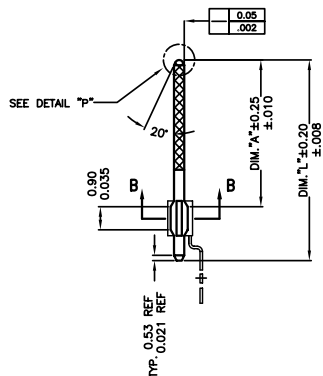

TYP. 0.25 MAX.
0.010 MAX.



DETAIL P
SCALE 50:1



DETAIL Q
SCALE 50:1

mat'l code	NOTE 2 & 3	surface	ISO 1902	tolerance	ISO 406	ISO 1101	projection	product family	PIN PRODUCTS
lit	ec'n no	dr	date	tolerances unless otherwise specified				title	
F	v05-1138	VS	2/23/06	angles	.X±.3/XX±.01		mm/inch	SELECTIVE PLATED	
				linear	.XX±.13/XXX±.008		Scale	BERG PIN	
				0°±2°	.000±.001/XXX±.002		1:1	dwg no	76772
				dr	V-SEBASTIAN	2/23/06		sheet	1 of 1
				engr	T.BREWBAKER	2/23/06		size	A3
				chr	T.BREWBAKER	2/23/06			
				appd	T.BREWBAKER	2/23/06		type	Product Customer Drawing
sheet	revision	F							
index	sheet	1							

PDM: Rev:F

STATUS Released

Printed: Oct 10, 2006