

## Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[FCI](#)  
[86093967894755AILF](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

DIMENSIONS

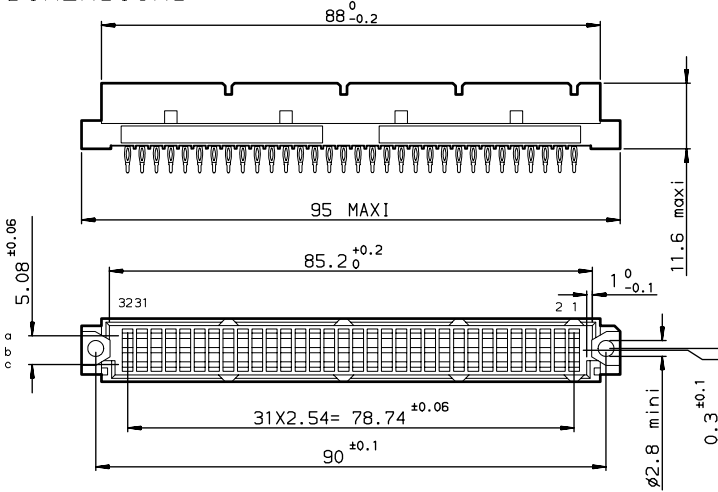

TERMINATION

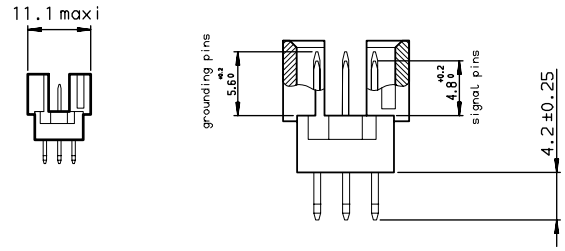

TIN LEAD PART NUMBER

PART NUMBER  
86093967894755130E1


LEAD FREE PART NUMBER

PART NUMBER  
86093967894755AILF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000C

P.C. CARD DRILLING (Component side view)

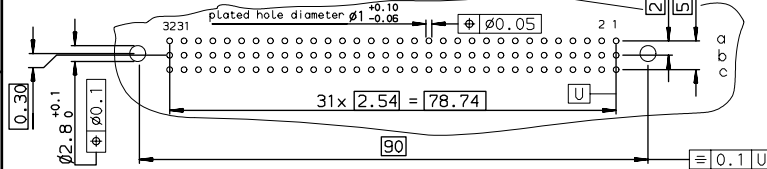

SPECIFICATION 130= 3 grounding pins in position :  
OR SPECIFICATION A1= Row: a-b-c Cavity: 32

rev	ecn no	dr	date
B	-	ROU	1999/11/30
C	LS05-004	JTA	2005/02/26
D	LS06-0095	LGO	2006/06/24
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface	tolerance std	projection	mm
Dr	ROUILLARD	ISO 1302	ISO 406 ISO 1101		Scale
Eng	TARON	TOLERANCES UNLESS OTHERWISE SPECIFIED		size	1.5
Chr	LEGARE	ANGULAR	0.X ±0.1	A3	LS06-0095
Appr	LEGARE	LINEAR	0.XX ±0.1	ECN	-
		0.XXX ±0.1	Product family	DIN 8609	Spec ref -
		0.XXX ±2	Product family	DIN 8609	Spec ref -
		REVERSE MALE 3 ROW 96 CONTACTS	NETAS code A9903096	C-8609-0703	Rev. D
catalog no		-	-	CUSTOMER	sheet 1 of 1