

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)
[09230009950](#)


For any questions, you can email us directly:
sales@integrated-circuit.com

DIN 41 612 · complementary type 3R



Number of contacts

30, 20

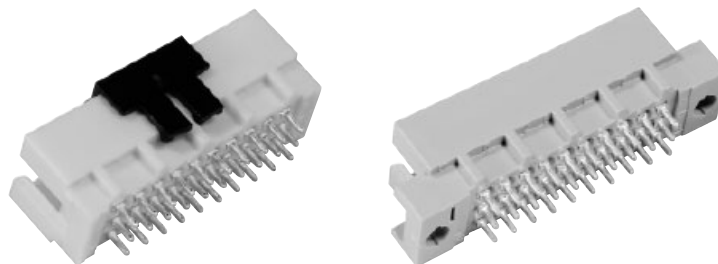

Male connectors

DIN Signal up to 2 A

Identification	Number of contacts	Contact arrangement	Part No. Performance levels according to IEC 60603-2. Explanation chapter 00		
			3	2	1
Male connector with solder pins 2.5 mm	30		Performance level 3 on request	09 29 130 6902	Performance level 1 on request
with fixing flange	20			09 29 120 6902	
with fixing flange, SMC	30			09 29 130 6519 ^{d)}	
without fixing flange	30			09 29 130 6592	
without fixing flange, SMC	30			09 29 130 6569 ^{d)}	
Male connector with solder pins 4.0 mm	30			09 29 130 6903	
with fixing flange	20			09 29 120 6903	
with fixing flange, SMC	30			09 29 130 6520 ^{d)}	
without fixing flange	30			09 29 130 6593	
without fixing flange, SMC	30			09 29 130 6570 ^{d)}	
Male connector with solder pins 13 mm	30			09 29 130 6577	
with fixing flange	20			09 29 120 6577	
with fixing flange, SMC	30			09 29 130 6521 ^{d)}	
Male connector with wrap posts ¹⁾ 13 mm	30			09 29 130 6907	
Male connector with press-in pins 5.0 mm	30			09 29 130 6904	
with fixing flange	20			09 29 120 6904	
without fixing flange	30			09 29 130 6504	
Male connector with press-in pins 13 mm	30			09 29 130 6985 ^{w)} 09 29 130 6974*	
with fixing flange	20			09 29 120 6974*	
without fixing flange	30			09 29 130 6574*	

* Wrap posts for interfacing selectively gold-plated (performance level 2)