



Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Amphenol RF](#)
[031-6508](#)

For any questions, you can email us directly:



sales@integrated-circuit.com

- NOTES:
- MATERIALS AND FINISHES
 - BODY - BRASS, NICKEL PLATING
 - CONTACT - BERYLLIUM COPPER, GOLD PLATING
 - BULLET CONTACT - BRASS, GOLD PLATING
 - INSULATOR - PTFE
 - HEX NUT - BRASS, NICKEL PLATING
 - LOCK WASHER - BRASS, NICKEL PLATING
 - GASKET - SILICONE RUBBER
 - FERRULE - SEAMLESS COPPER TUBE, NICKEL PLATING
 - HEAT SHRINK TUBING - CROSSLINKED POLYOLEFIN
 - ELECTRICAL:
 - A. IMPEDANCE: 50 OHM
 - B. FREQUENCY RANGE: DC - 6 GHz
 - C. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
 - MECHANICAL:
 - A. DURABILITY: 500 CYCLES MIN.
 - B. TEMPERATURE RANGE: -40° C TO +85° C
 - PACKAGING:
 - A. QUANTITY: SINGLE PACK
 - B. MARKING: BAG TO BE MARKED "AMPHENOL RF 31-6508, AND DATE CODE"


THIRD ANGLE PROJ.		REVISIONS			
REV	DESCRIPTION	DATE	ECO	APPR	
A	RELEASE TO MFG.	25-Mar-13	48952	TD	
B	ADD ARC LOGO TO BODY AND AMPHENOL RF TO HST VRO-DM13082201J8	30-Aug-13	49619	RLB	



SCALE 1.600

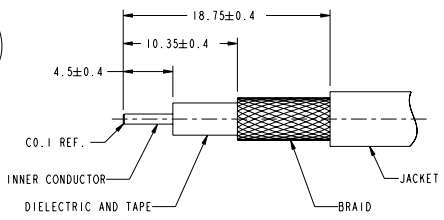

SHOWS CABLE ENTRY DIMENSIONS.

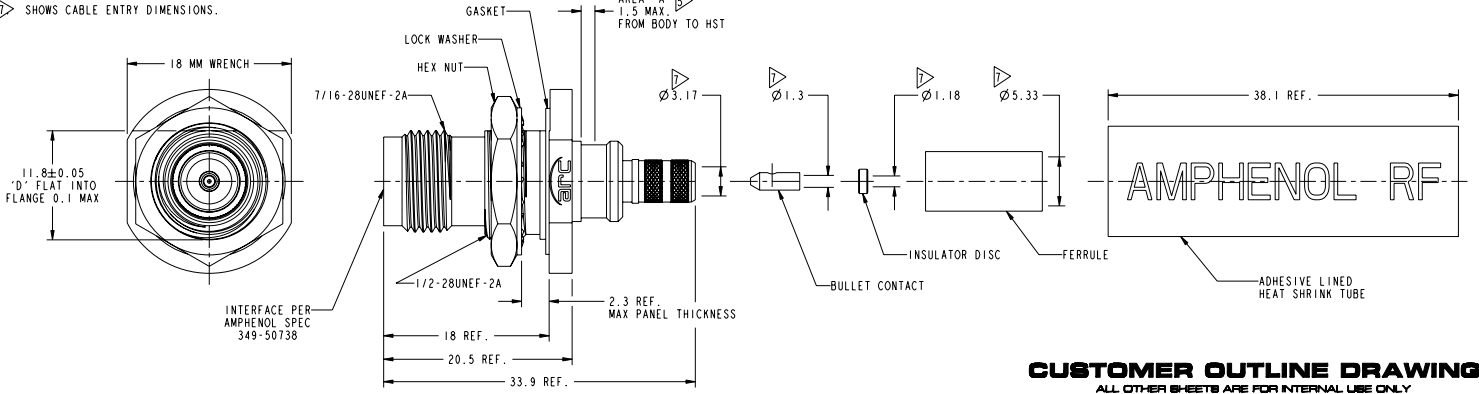

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

MATERIAL SEE NOTES REFERENCE CONFIGURATION LEVEL: FINISH	DRAWN J. CHEN ENGINEER D. DAVE	DATE 30-Aug-13 DATE 08-Sept-11	TITLE TNC STR BHD JACK RP 1P-67 FOR LMR-200 CABLE	Amphenol RF www.amphenolrf.com
	APPROVED S. HSIEH	DATE 04-Sep-13	SCALE: 2.5:1.0 SHEET 2 OF 2	DRAWING NO. 31-6508
	CAD FILE	DWG SIZE B	REV B	ITEM NO. 31-6508
				PART NO. 31-6508