



Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Bel Fuse Inc.](#)
[S554-5999-14-F](#)

For any questions, you can email us directly:
sales@integrated-circuit.com



CABLE MODEM MAGNETICS
RF Splitter/Combiner

CM03401


- High isolation splitter
- Excellent amplitude balance
- Ideal for cable distribution equipment and set top box applications
- Operating bandwidth optimized for upstream and downstream data paths
- Operating temperature -40° to +85° C
- Designed to withstand 225° C peak IR reflow temperature

ELECTRICAL SPECIFICATIONS at 25° C

Frequency MHz	Z Ω	Insertion Loss dB max +3dB loss			Return Loss dB min		Isolation dB min		Amplitude Unbalance dB max	
		1MHz to 50MHz	50MHz to 600MHz	600MHz to 1GHz	1MHz to 50MHz	50MHz to 1GHz	1MHz to 50MHz	50MHz to 1GHz	1MHz to 50MHz	50MHz to 1GHz
5 - 1000	75	0.5	0.85	1.2	13	18	20	25	1.2	0.8

SCHEMATIC

S554-5999-14

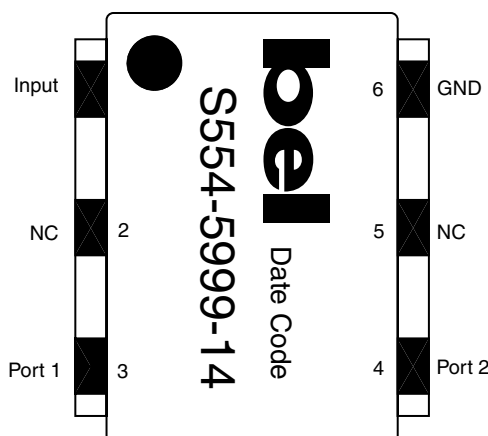





bel

CABLE MODEM MAGNETICS
RF Splitter/Combiner

CM03401

MECHANICAL

S554-5999-14

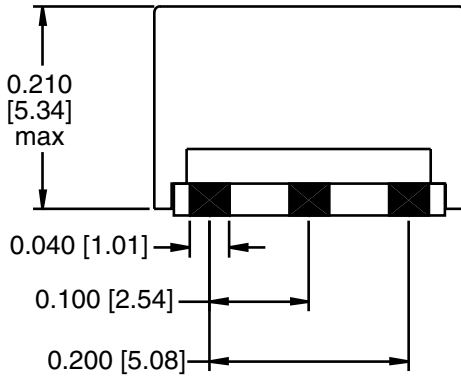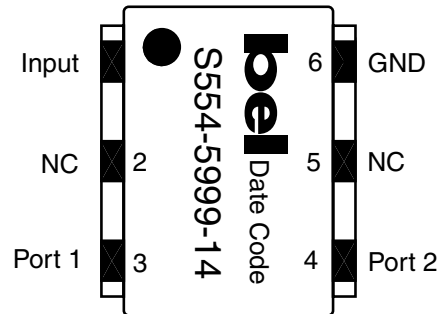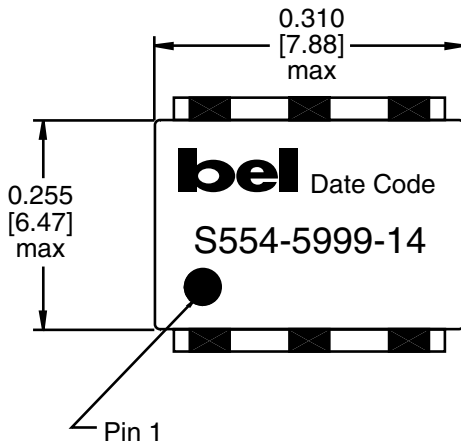

©2004 Bel Fuse Inc. Specifications subject to change without notice. 02.04

CORPORATE

Bel Fuse Inc.
 206 Van Vorst Street
 Jersey City, NJ 07302
 Tel 201-432-0463
 Fax 201-432-9542
 www.belfuse.com

FAR EAST

Bel Fuse Ltd.
 8F / 8 Luk Hop Street
 San Po Kong
 Kowloon, Hong Kong
 Tel 852-2328-5515
 Fax 852-2352-3706
 www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
 Preston Technology Management Centre
 Marsh Lane, Suite G7, Preston
 Lancashire, PR1 8UD, U.K.
 Tel 44-1772-556601
 Fax 44-1772-888366
 www.belfuse.com