

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Bel Fuse Inc.](#)
[S558-5500-13-F](#)

For any questions, you can email us directly:
sales@integrated-circuit.com



VOICE OVER IP MAGNETICS
Broadband Transformers

S558-5500-13


- Support 10 Mbps and 100 Mbps VoIP applications
- Compliant with IEEE 802.3 standards
- Designed to meet 350mA balanced DC line current
- Operating temperature 0° to 70° C
- Minimum interwinding breakdown voltage of 1500 Vrms

ELECTRICAL SPECIFICATIONS AT 25° C

Turns Ratio ±3%		Insertion Loss dB min	Return Loss		Primary Inductance μH min	Leakage Inductance μH max	Interwinding Capacitance pF max	DCR Ω max			
TXIN : TXO	RXIN : RXO		100kHz to 100MHz	2MHz to 30MHz 60MHz to 80MHz				TXIN	TXO	RXIN	RXO
1CT : 1CT	1CT : 1CT	-0.5	-16	-10	400	0.4	20	0.5	0.5	0.5	0.5

SCHEMATIC

S558-5500-13

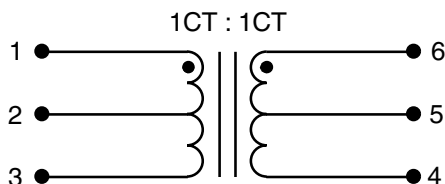




VOICE OVER IP MAGNETICS
Broadband Transformers

S558-5500-13

MECHANICAL

S558-5500-13

Suggested Pad Layout

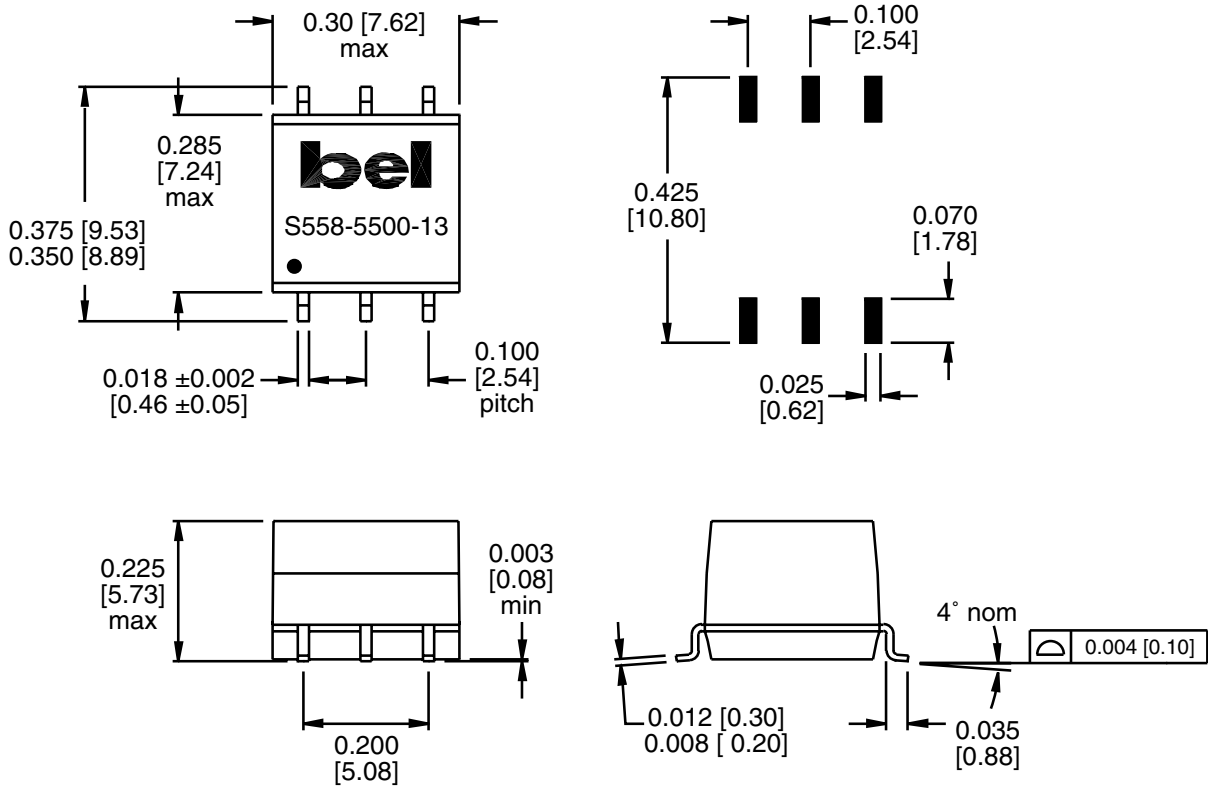

©2005 Bel Fuse Inc. Specifications subject to change without notice. 06.05

CORPORATE

Bel Fuse Inc.
 206 Van Vorst Street
 Jersey City, NJ 07302
 Tel 201-432-0463
 Fax 201-432-9542
 www.belfuse.com

FAR EAST

Bel Fuse Ltd.
 8F / 8 Luk Hop Street
 San Po Kong
 Kowloon, Hong Kong
 Tel 852-2328-5515
 Fax 852-2352-3706
 www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
 Preston Technology Management Centre
 Marsh Lane, Suite G7, Preston
 Lancashire, PR1 8UD, U.K.
 Tel 44-1772-556601
 Fax 44-1772-888366
 www.belfuse.com