



Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ASSMANN WSW Components](#)
[AT-C-26-4/4/W-12-OE](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

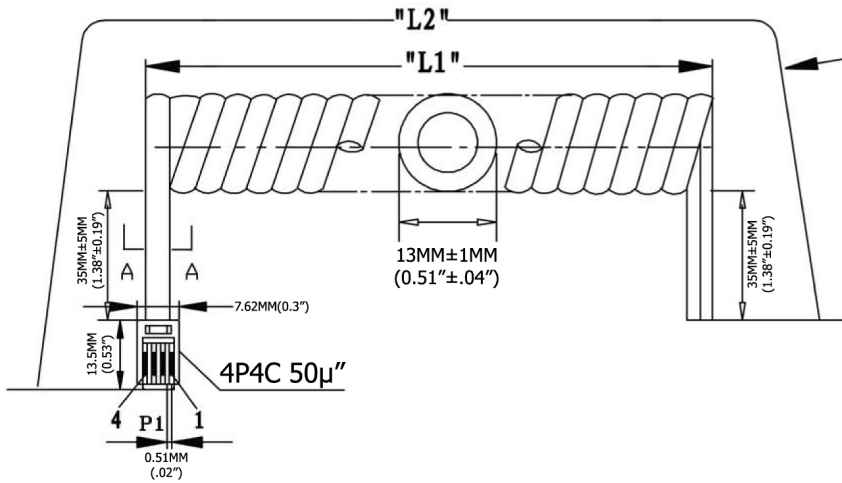

Extended length is with 500g of force

Materials:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36" [.014MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54µm [.000100] thick nickel underplate
- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C): PP6331 ID 0.95-1.0
- Jacket: PVC NOUL 80P
- Package: Individual PE Bag



TERMINATION:

| P1 | COLOR |
|----|--------|
| 1 | BLACK |
| 2 | RED |
| 3 | GREEN |
| 4 | YELLOW |

| Extended Length ("L2") | Typical Retracted Length ("L1") |
|-----------------------------|---------------------------------|
| 144.0 Inches - 165.6 Inches | 32.0 Inches |
| 3,657.6MM-4,206.24MM | 812.8MM |

SEC:A-A



ITEM NO

AT-C-26-4/4/W-12-OE

TITLE NON-UL 26AWG (0.16/7)*4C, O.D.: 2.4*4.8MM

Single Plug, 50µ" of contact plating, WHITE

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283

Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED

© Copyright 2009 by Assmann Electronic Components
All International Rights Reserved