



Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ASSMANN WSW Components](#)
[AT-C-26-8/8/S-25-OE](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

1 2 3 4 5 6 7

A

B

C

D

E

F

A


B

C

D

E

F

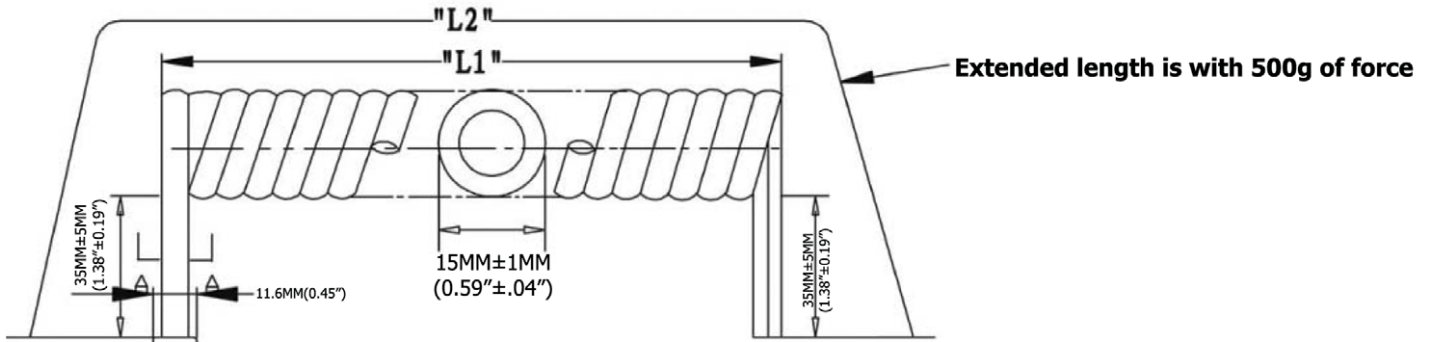


Extended length is with 500g of force



P1	COLOR
1	WHITE
2	ORANGE
3	BLACK
4	RED
5	GREEN
6	YELLOW
7	BLUE
8	BROWN

- Material:**
- Plug Housing : Polycarbonate, clear
 - Plug Terminal: 0.36" [0.14MM] Thick Phosphor Bronze
 - Connector: 50" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54µ[.000100] thick nickel underplate
 - Conductor(X4C): 26AWG (0.12X12) Bare Copper
 - Insulation(X43): PP6331 ID 0.95-1.0
 - Jacket: PVC NOUL 80P
 - Package: Individual PE Bag



Extended Length ("L2")	Typical Retracted Length ("L1")
300.0 Inches - 345.0 Inches	126.0 Inches
7,620.0MM-8,763.0MM	3,200.4MM

- Electrical:**
- Voltage rating: 30V (DC)

G

H

G

H

Scale	1:1					Name	Item No.
TOLERANCE					Drawn	11.21.11	Chappell
X.X	±0.40				Approved		
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°						
							Drawing No. rev00
Modification Date Name							Replace Sheet



1 2 3 4 5 6 7